

Installation Guide



This procedure is designed as an installation aid. Skilled tradespeople that are familiar with general construction and electrical installation techniques should perform the installation. Licensed electricians should provide electrical installation connections. Installations and connections should be done in accordance with all national and local codes and permits. In no way is this document intended to construe warranty or fitness of use of the products described, nor is it intended to provide safety instruction for those installing the product.

⚡ WARNING


Before proceeding with installation or service maintenance of this product:

- Disconnect power to reduce electrical shock risk.
- Review the entire Installation Guide.
- Inspect this properly packaged product for any damage that may have occurred during transit.
- Verify product application complies with manufacturer design recommendations.
- Verify the availability of necessary tools and incidental material.
- Verify applicable code requirements. Field assembly and installation are subject to acceptance by local inspection authority.
- Appropriate safety equipment to be determined by end user, per applicable safety standards and precautions.


-Installation Tools Reference - Packing List:

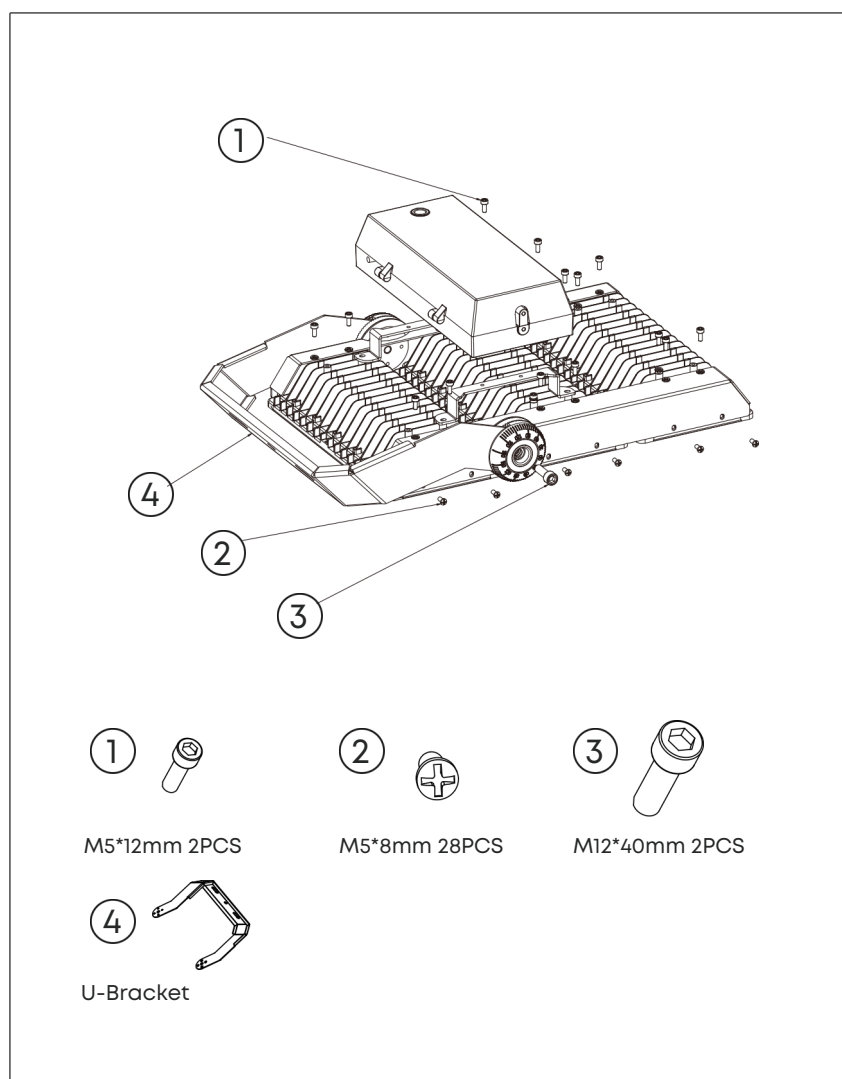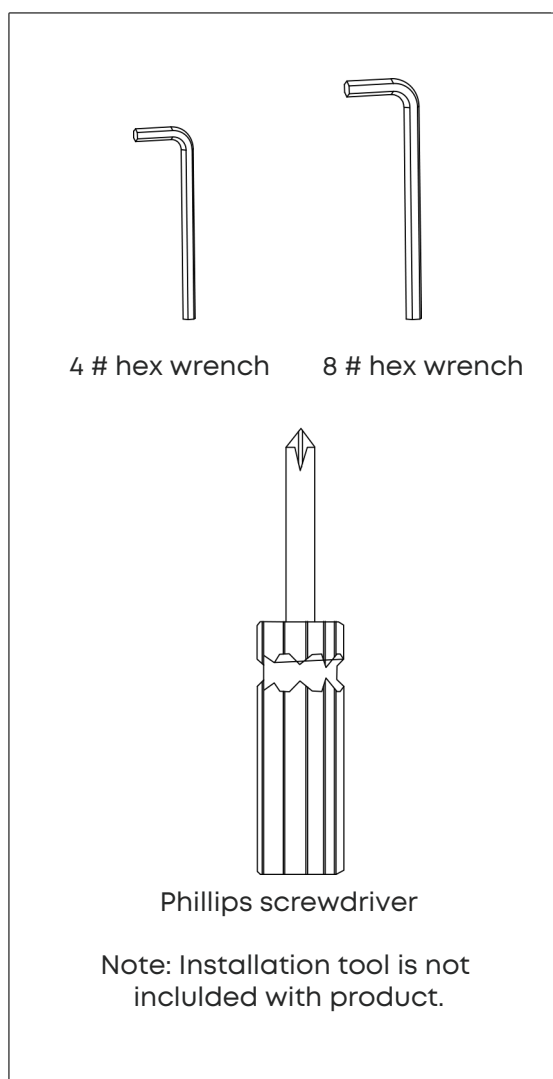

Product Display

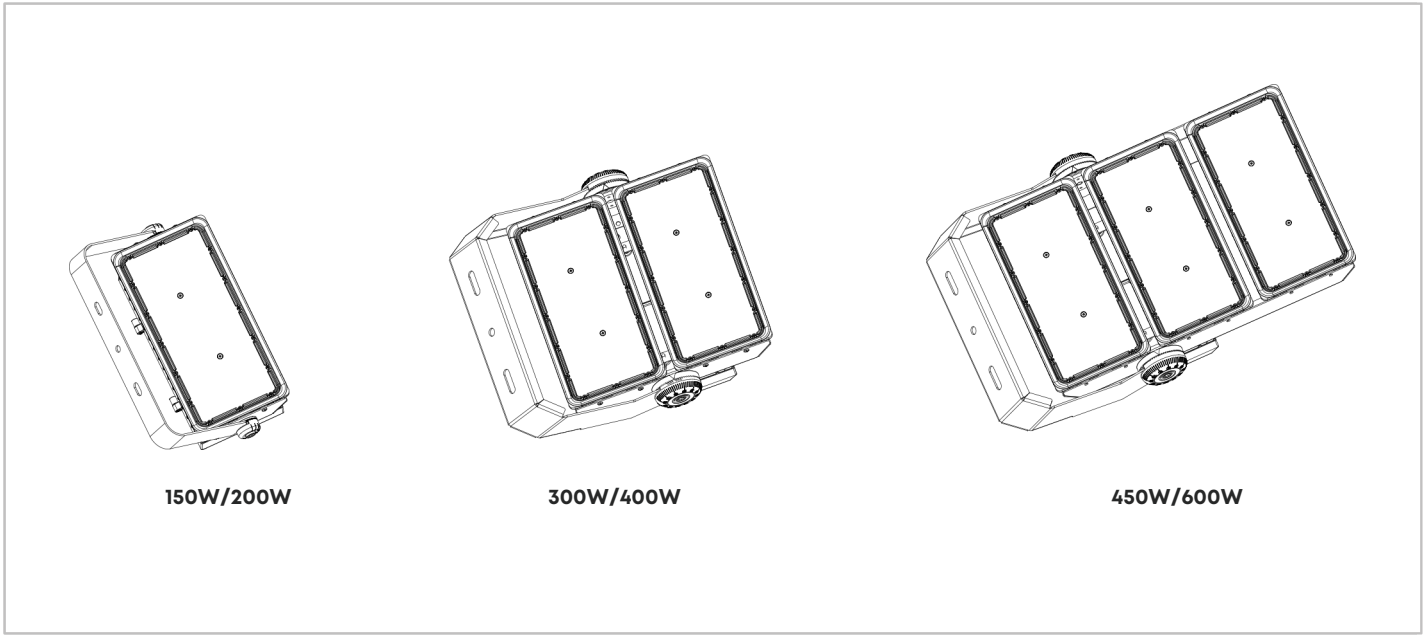

Bracket Scale Illustration

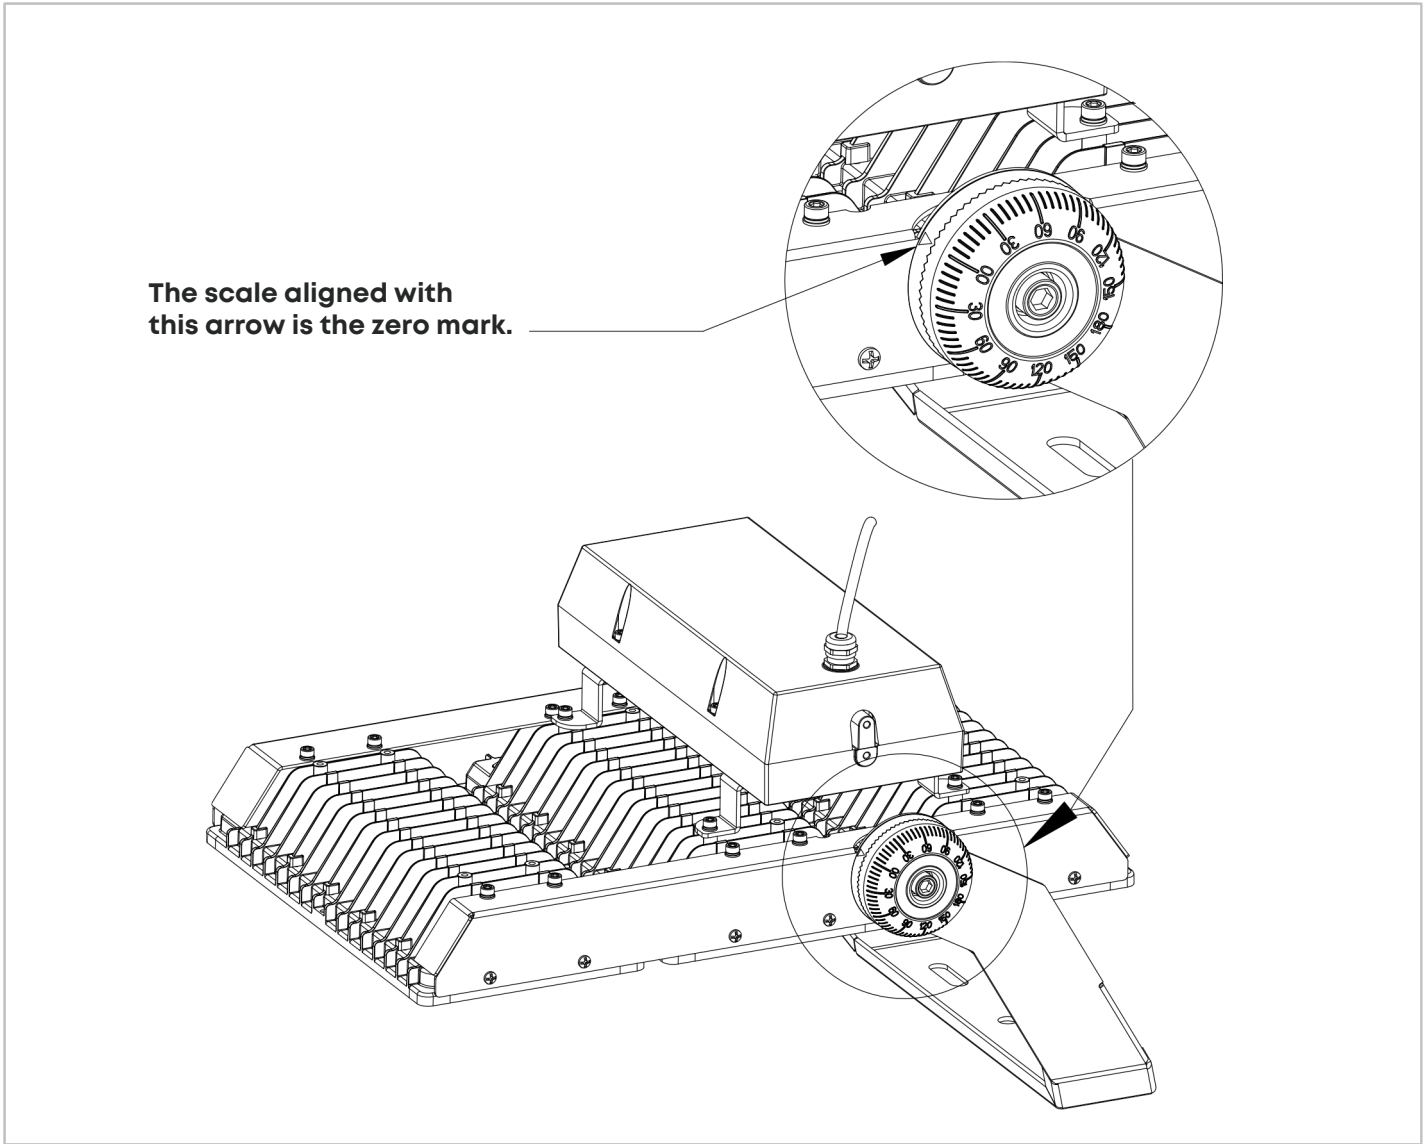


Installation Procedure

A



Step 1- Make two holes in the wall or ceiling, with the hole size shown in Figure F


B



Step 2- Use a hammer to drive the screw into the wall or ceiling

C


Torque $\geq 8.5 \text{ N}\cdot\text{M}$ for final locking

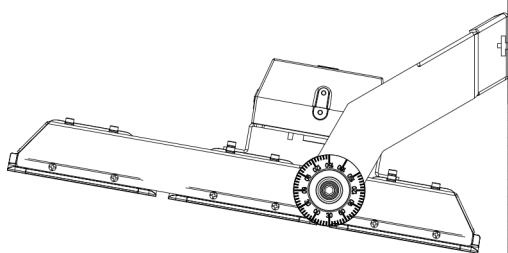

Step 3- Secure the lighting fixture to the wall or ceiling

D


After adjusting to the appropriate angle, with a torque force greater than $\geq 5 \text{ N}\cdot\text{M}$, tighten the screw until it locks.

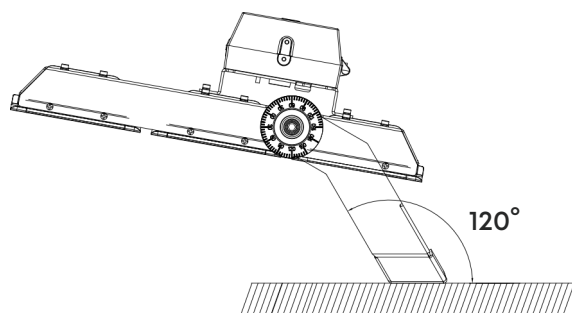

Step 4- Loosen the screw and adjust the lamp to the appropriate angle (maximum angle is 180°)


E

Step 5- Connect the cable leading out of the lamp to the municipal power line, as shown in Figure F

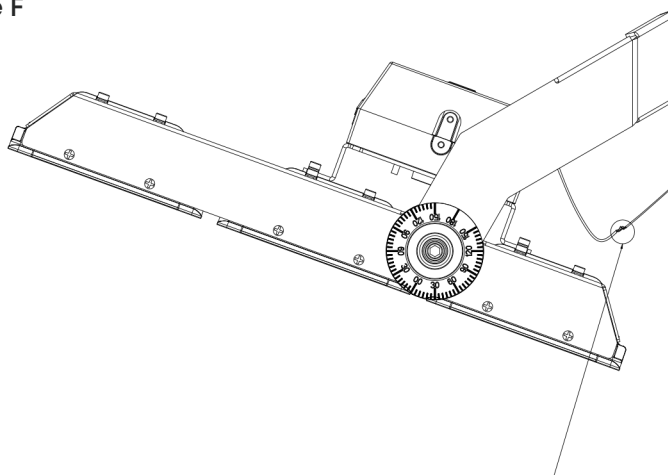


Note: The wiring terminals should be waterproof with glue or connected with waterproof connectors

F

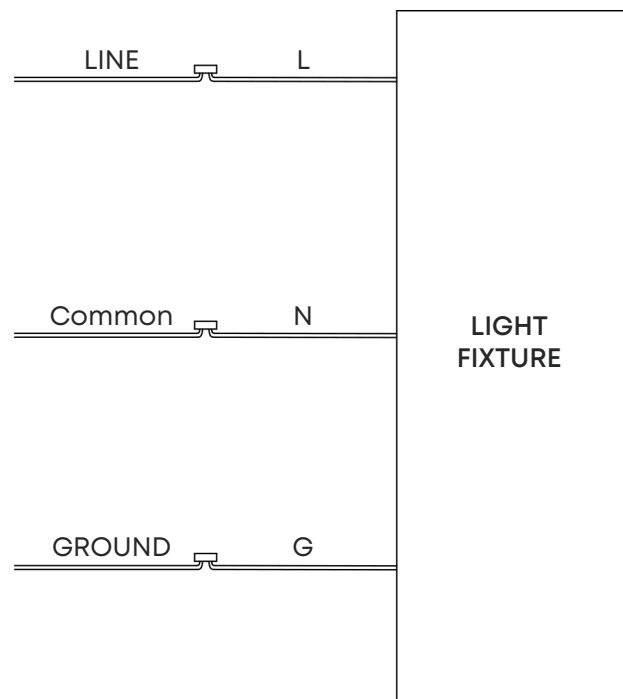

Bracket Dimensions:

G

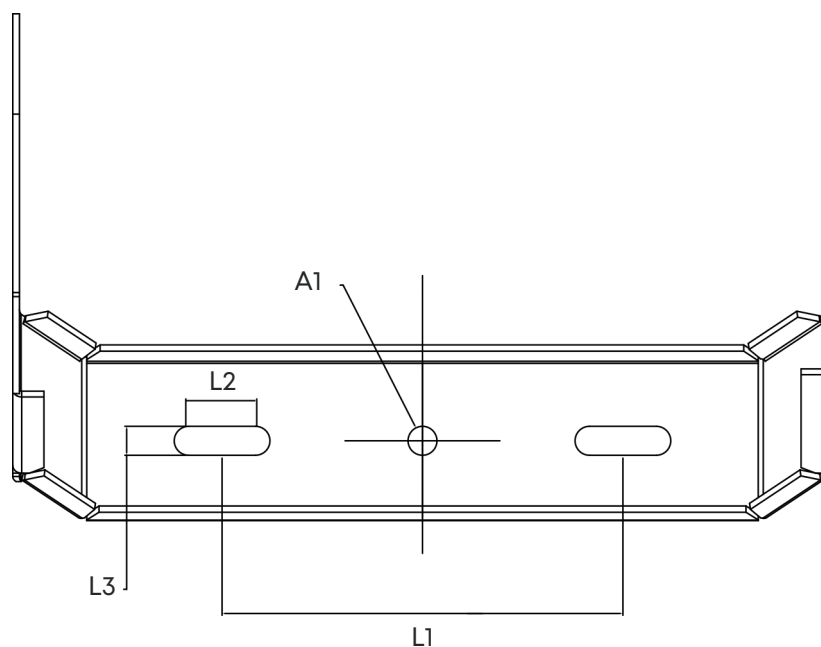

Power	L1	L2	L3	A1
200W	150mm(5.91")	12mm(0.47")	11mm(0.43")	ø11mm(0.43")
400W	180mm(7.09")	30mm(1.18")	13mm(0.51")	ø13mm(0.51")
600W	180mm(7.09")	30mm(1.18")	13mm(0.51")	ø13mm(0.51")