



IF LED FLOOD LIGHT
30W-300W

OVER YEARS 
10 EXPERIENCE
www.aokledlight.com

> Features of IF Series

- iF series LED flood light provides general area lighting and improve the overall look of facades and signage.
- The slim, low profile design adds architectural appeal to any general flood lighting application with crisp uniform white light that offer high performance maximizing energy savings. With remarkable light quality and smooth white light, buildings and signage will stand out in the crowd.
- Die-cast aluminum housing treated with electrophoresis and powder coating for strong anti-corrosion performance.
- Extra clear silk printed tempered glass.
- Bracket surface featuring hot galvanizing processing, providing strong corrosion resistance.
- Tool-less entry through buckles integrated
- Tool free adjustable bracket +/-90 by means of mechanics
- Power factor: Up to 0.98 at full load
- Surge protection: 10kV CM/6kVDM surge immunity according to EN 61000-4-5 and EN 61547
- Industrial application, parking lots, monuments, buildings, and general area spaces.

UP TO 150 LM/W	L90B10 >52000hrs @ 25°C	100-277V 50/60HZ	THD <9%
• 2700K • 3000K • 4000K • 5000K • 5700K • 6500K	CRI 70/80/90	ULR =0	Working Temperature Environment -40°C~50°C (-40°F~+122°F)
+/-90° Tool free adjustable bracket +/-90	IP66 IK07	DIM	



5 **10** **WARRANTY**
5 Year Limited Warranty,
10 Year Preferred Warranty.
Please consult with our sales for detailed agreement.

wally@aokledlight.com
+1 626-986-4050 (US)
+86 755 2357 9148 (CN)
©2021 AOK LED LIGHT CO., LTD. All Right Reserved.



> Photometric Design


- Optimized, premium optical grade Mitsubishi polycarbonate lens, the efficient design of the modules make each light engine highly customizable, allowing the light distribution to be aimed toward the application.
- Optical systems allow for versatility and flexible control for a wide variety of applications.
- We deliver innovation and customization, further expanding the flexibility of the project. Exceptional uniformity and low glare for maximum comfort and neighbor-friendly.

Classification




Distribution

IF-30W/50W/75W
Optional Beam Angle: 110°



IF-96W/145W/200W/230W/260W/300W
Optional Beam Angle: 30°/60°/90°/110°/120°
/Type2/Type3/Type4/Type5

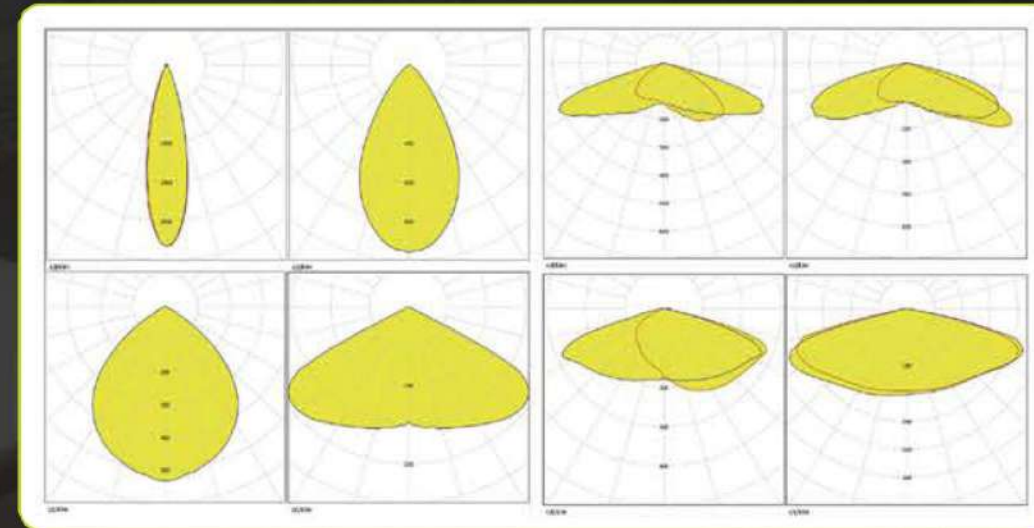

> Application Reference

common elements





Illuminate Your Future

5 **10** **WARRANTY**
5 Year Limited Warranty,
10 Year Preferred Warranty.
Please consult with our sales for detailed agreement.

wally@aokledlight.com
www.aokledlight.com
+1 626-986-4050 (US)
+86 755 2357 9148 (CN)

Manufacturing: Building 1 & 4, St. George's Science and Technology Industrial Park, Shajing Street, Shenzhen, China, 518124.
Fuzhou HQ: Room 301, Yujing Business Center Zone 1, No. 12 Baihuazhou road, Cangshan district, Fuzhou, China, 350007
NorthAmerica HQ: 18541 E Gale Ave, City of Industry, CA91748 USA

Copyright ©2021 AOK LED LIGHT CO., LTD. All Right Reserved.