


室内灯具光度数据

实测参数: U:219.3V I:0.4659A P:99.45W PF:0.9734 Freq:50.00Hz 实检光通:18645.3x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-100WHBE-NV-L2-00-4080-120D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

光源数据		光度数据				光效: 187.49 lm/W
型号	2835	峰值光强 (cd)	6413	S/MH (C0/180)	1.32	
标称功率 (W)	100	灯具效率 (%)	100.0	S/MH (C90/270)	1.31	
额定电源电压 (V)	220	总光通量 (lm)	18645	$\eta$ UP, DN (C0-180)	0.0, 50.4	
额定光通量 (lm)	18645.3	CIE分类	直接	$\eta$ UP, DN (C180-360)	0.0, 49.6	
灯具内光源数 (只)	1	上射光通比 (%)	0.0	CIBSE SHR NOM	1.50	
实测电源电压 (V)	220	下射光通比 (%)	100.0	CIBSE SHR MAX	1.50	

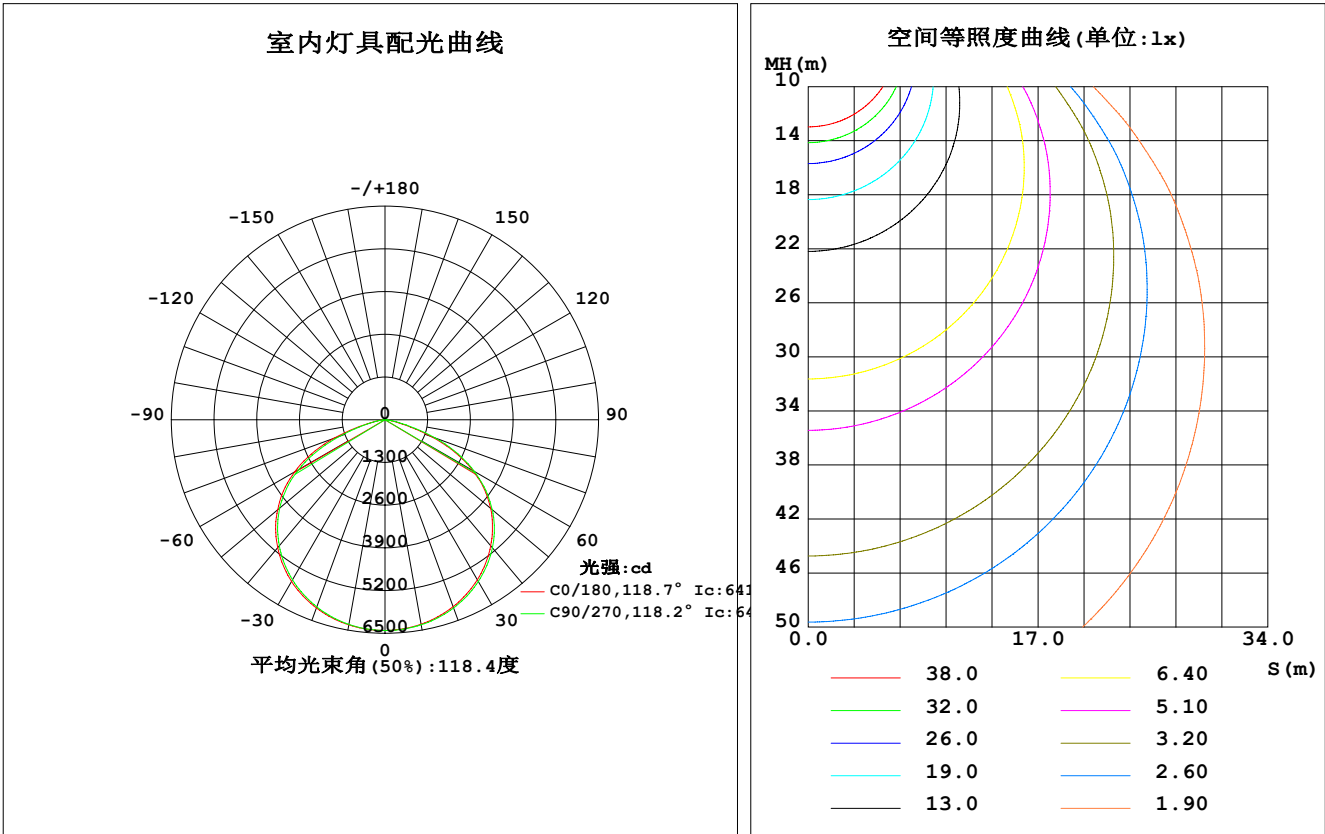

C角度范围: 0度 - 360度  
C角度间隔: 15.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: yanyonggeng  
测试日期: 2024-8-23

Y角度范围: 0度 - 180度  
Y角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.363T  
环境湿度: 65.0%  
测试距离: 7.682米 [K=1.0000]  
备注:

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	6318	6330	6337	6340	6338	6328	6323	6317	0- 10	608.1	608.1	3.26, 3.26
20	6056	6082	6096	6105	6098	6078	6064	6053	10- 20	1759	2367	12.7, 12.7
30	5622	5659	5682	5693	5685	5655	5628	5617	20- 30	2716	5083	27.3, 27.3
40	5006	5059	5086	5097	5080	5045	5006	4997	30- 40	3364	8447	45.3, 45.3
50	4200	4270	4259	4310	4264	4231	4183	4179	40- 50	3601	12048	64.6, 64.6
60	3077	3210	3139	3269	3174	3149	3028	3112	50- 60	3329	15377	82.5, 82.5
70	1502	1653	1632	1770	1648	1537	1455	1512	60- 70	2381	17758	95.2, 95.2
80	210.1	256.4	283.0	295.3	297.4	241.7	251.9	192.2	70- 80	821.1	18579	99.6, 99.6
90	0	0	0	0	0	0	0	0	80- 90	65.92	18645	100, 100
100	0	0	0	0	0	0	0	0	90-100	0	18645	100, 100
110	0	0	0	0	0	0	0	0	100-110	0	18645	100, 100
120	0	0	0	0	0	0	0	0	110-120	0	18645	100, 100
130	0	0	0	0	0	0	0	0	120-130	0	18645	100, 100
140	0	0	0	0	0	0	0	0	130-140	0	18645	100, 100
150	0	0	0	0	0	0	0	0	140-150	0	18645	100, 100
160	0	0	0	0	0	0	0	0	150-160	0	18645	100, 100
170	0	0	0	0	0	0	0	0	160-170	0	18645	100, 100
180	0	0	0	0	0	0	0	0	170-180	0	18645	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度)：10247 lm

%lum = 55.0%

%lamp = 55.0%

锥面光通量(120度)：15377 lm

%lum = 82.5%


%lamp = 82.5%

C角度范围： 0度 - 360度  
C角度间隔：15.0度  
测试速度：快速  
环境温度:25.3℃  
测试人员:yanyonggeng  
测试日期:2024-8-23

γ角度范围： 0度 - 180度  
γ角度间隔： 1.0度  
测试系统：远方 (EVERFINE) GO-2000A\_V1系统 V2.0.363T  
环境湿度:65.0%  
测试距离:7.682米 [K=1.0000]  
备注：

灯具亮度限制曲线

实测参数: U:219.3V I:0.4659A P:99.45W PF:0.9734 Freq:50.00Hz 实检光通:18645.3x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-100WHBE-NV-L2-00-4080-120D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

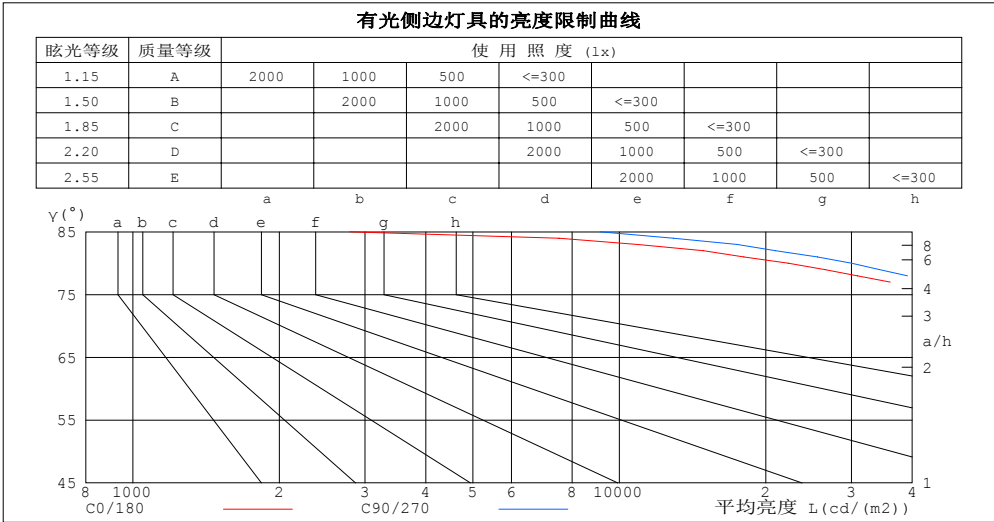

平均亮度值 cd/ (m2)		
Y (°)	C0/180	C90/270
85	2795	9138
80	22248	30011
75	47705	56594
70	80713	87866
65	102786	106529
60	113157	115601
55	118431	120293
50	120138	122032
45	120308	122624


C角度范围: 0度 - 360度  
C角度间隔: 15.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: yanyonggeng  
测试日期: 2024-8-23

Y角度范围: 0度 - 180度  
Y角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.363T  
环境湿度: 65.0%  
测试距离: 7.682米 [K=1.0000]  
备注:

工作面利用系数和灯具概算曲线

实测参数: U:219.3V I:0.4659A P:99.45W PF:0.9734 Freq:50.00Hz 实检光通:18645.3x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-100WHBE-NV-L2-00-4080-120D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.77	.83	.79	.75	.80	.77	.74	.72
3.0	.81	.73	.67	.79	.72	.66	.76	.70	.65	.74	.68	.64	.71	.66	.63	.60
4.0	.72	.63	.56	.70	.62	.56	.68	.61	.55	.65	.59	.54	.63	.58	.54	.52
5.0	.64	.55	.48	.63	.54	.48	.61	.53	.48	.59	.52	.47	.57	.51	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.55	.47	.41	.53	.46	.41	.51	.45	.41	.39
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.34
8.0	.47	.39	.33	.47	.38	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.30
9.0	.43	.35	.29	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.31	.26	.24

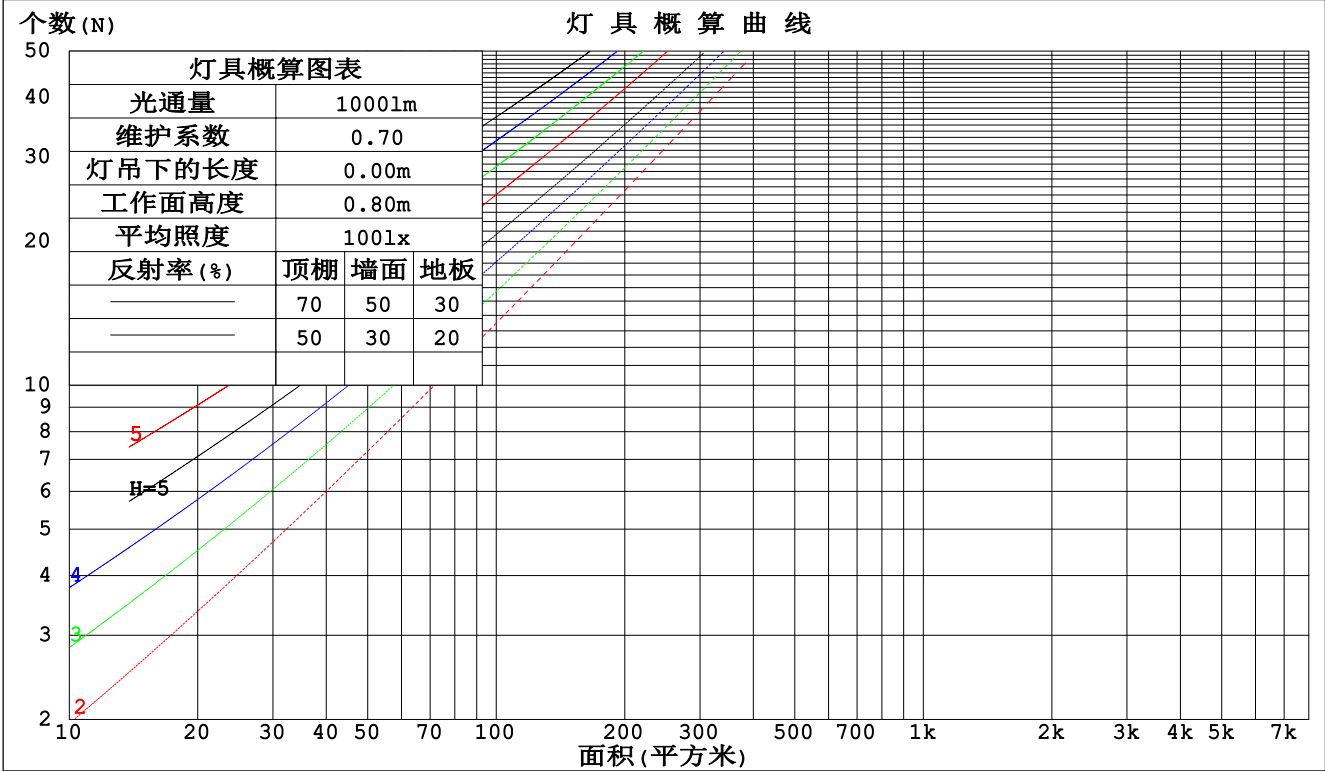

C角度范围: 0度 - 360度  
C角度间隔: 15.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: yanyonggeng  
测试日期: 2024-8-23

γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.363T  
环境湿度: 65.0%  
测试距离: 7.682米 [K=1.0000]  
备注:

墙面和天花板利用系数

实测参数: U:219.3V I:0.4659A P:99.45W PF:0.9734 Freq:50.00Hz 实检光通:18645.3x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-100WHBE-NV-L2-00-4080-120D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi$ 263mm	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.284	.162	.051	.277	.158	.050	.264	.151	.048	.252	.145	.047	.241	.140	.045	
2.0	.277	.152	.046	.270	.149	.046	.259	.144	.045	.248	.139	.044	.238	.135	.042	
3.0	.261	.139	.042	.255	.137	.041	.245	.133	.040	.235	.129	.040	.227	.125	.039	
4.0	.243	.126	.037	.238	.125	.037	.229	.122	.036	.221	.119	.036	.213	.116	.035	
5.0	.226	.115	.033	.222	.114	.033	.214	.111	.033	.207	.109	.032	.199	.107	.032	
6.0	.211	.106	.030	.207	.105	.030	.200	.102	.030	.193	.100	.030	.187	.098	.029	
7.0	.197	.097	.028	.194	.096	.027	.187	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.184	.090	.025	.181	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025	
9.0	.173	.084	.023	.170	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.151	.075	.021	.147	.074	.021	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.179	.156	.136	.153	.134	.117	.104	.092	.081	.060	.053	.047	.019	.017	.015	
2.0	.170	.132	.100	.146	.114	.086	.100	.079	.060	.058	.046	.035	.018	.015	.011	
3.0	.163	.114	.076	.139	.099	.066	.096	.068	.046	.055	.040	.027	.018	.013	.009	
4.0	.155	.101	.059	.133	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.148	.090	.048	.127	.078	.042	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.141	.082	.040	.121	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.128	.069	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004	
9.0	.122	.064	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C角度范围: 0度 - 360度  
C角度间隔: 15.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: yanyonggeng  
测试日期: 2024-8-23

γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.363T  
环境湿度: 65.0%  
测试距离: 7.682米 [K=1.0000]  
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:219.3V I:0.4659A P:99.45W PF:0.9734 Freq:50.00Hz 实检光通:18645.3x1 lm										
灯具名称: AOK HBE					灯具类型:			灯具重量:		
灯具规格: AOK-100WHBE-NV-L2-00-4080-120D-P					外型尺寸:			测试编号:		
制造厂商: AOK					发光口面: Φ263mm			遮光角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	29.7	31.2	30.0	31.4	31.7	29.8	31.3	30.1	31.5	31.7
3H	30.9	32.3	31.2	32.5	32.7	31.0	32.4	31.3	32.6	32.8
4H	31.0	32.3	31.3	32.6	32.8	31.2	32.5	31.5	32.8	33.0
6H	31.0	32.2	31.3	32.5	32.8	31.2	32.4	31.5	32.7	33.0
8H	31.0	32.1	31.3	32.4	32.7	31.2	32.4	31.5	32.6	32.9
12H	30.9	32.0	31.3	32.3	32.6	31.1	32.3	31.5	32.6	32.9
4H 2H	30.3	31.7	30.7	31.9	32.2	30.4	31.7	30.7	31.9	32.2
3H	31.6	32.7	31.9	33.0	33.3	31.7	32.8	32.0	33.1	33.4
4H	31.7	32.8	32.1	33.1	33.4	31.9	32.9	32.3	33.3	33.6
6H	31.7	32.7	32.1	33.0	33.4	31.9	32.9	32.3	33.2	33.6
8H	31.7	32.6	32.1	32.9	33.3	31.9	32.8	32.3	33.1	33.5
12H	31.7	32.4	32.1	32.8	33.2	31.9	32.7	32.3	33.0	33.4
8H 4H	31.8	32.6	32.2	33.0	33.4	31.9	32.8	32.3	33.1	33.5
6H	31.8	32.5	32.3	32.9	33.3	32.0	32.7	32.4	33.1	33.5
8H	31.8	32.4	32.2	32.8	33.3	32.0	32.6	32.4	33.0	33.5
12H	31.8	32.3	32.2	32.7	33.2	32.0	32.5	32.4	32.9	33.4
12H 4H	31.7	32.5	32.2	32.9	33.3	31.9	32.7	32.3	33.1	33.5
6H	31.8	32.4	32.2	32.8	33.3	32.0	32.6	32.4	33.0	33.5
8H	31.8	32.3	32.2	32.7	33.2	32.0	32.5	32.4	32.9	33.4
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.3 / - 0.5					+ 0.3 / - 0.5				
2.0H	+ 0.3 / - 0.6					+ 0.3 / - 0.5				

依据CIE Pub.117计算, 18645lm光源光通, 表格已经进行修正(8log(F/F0) = 10.2)。

C角度范围: 0度 - 360度  
C角度间隔: 15.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: yanyonggeng  
测试日期: 2024-8-23

γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.363T  
环境湿度: 65.0%  
测试距离: 7.682米 [K=1.0000]  
备注:

UF利用系数表

实测参数: U:219.3V I:0.4659A P:99.45W PF:0.9734 Freq:50.00Hz 实检光通:18645.3x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-100WHBE-NV-L2-00-4080-120D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	49	65	55	49	42
1.00	77	66	59	76	65	58	73	67	58	51
1.25	84	74	67	83	73	67	80	72	66	59
1.50	89	80	73	88	79	72	85	77	71	64
2.00	96	88	82	94	87	81	91	85	80	72
2.50	100	93	87	98	91	86	94	89	84	76
3.00	103	97	92	101	95	91	97	93	89	80
4.00	107	102	98	105	100	96	101	97	94	85
5.00	110	105	101	107	103	100	103	100	97	88
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 $SHRNOM = 1.25$			

C角度范围: 0度 - 360度  
C角度间隔: 15.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: yanyonggeng  
测试日期: 2024-8-23

γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.363T  
环境湿度: 65.0%  
测试距离: 7.682米 [K=1.0000]  
备注:

## 灯具等光强曲线

实测参数: U:219.3V I:0.4659A P:99.45W PF:0.9734 Freq:50.00Hz 实检光通:18645.3x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-100WHBE-NV-L2-00-4080-120D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

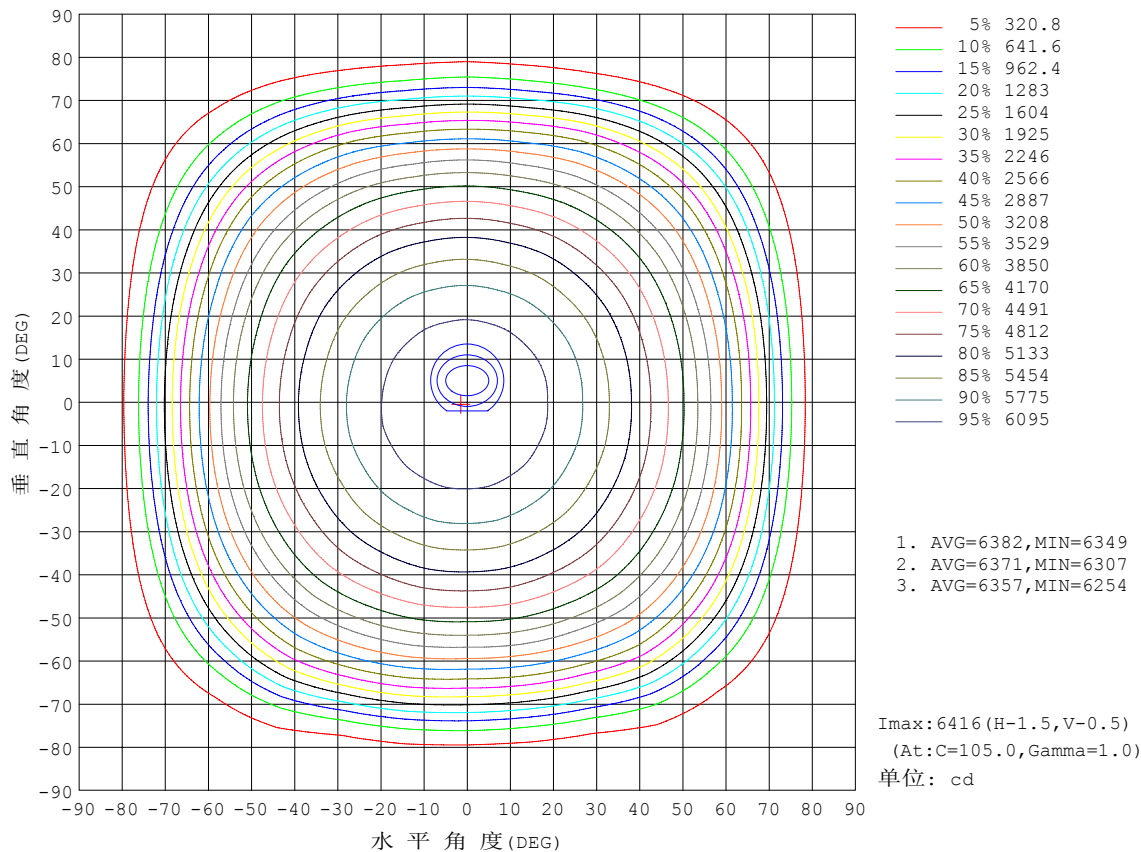


C角度范围: 0度 - 360度  
C角度间隔: 15.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: yanyonggeng  
测试日期: 2024-8-23

γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.363T  
环境湿度: 65.0%  
测试距离: 7.682米 [K=1.0000]  
备注:



灯 具 有 效 平 均 照 度 图

实测参数: U:219.3V I:0.4659A P:99.45W PF:0.9734 Freq:50.00Hz 实检光通:18645.3x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-100WHBE-NV-L2-00-4080-120D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

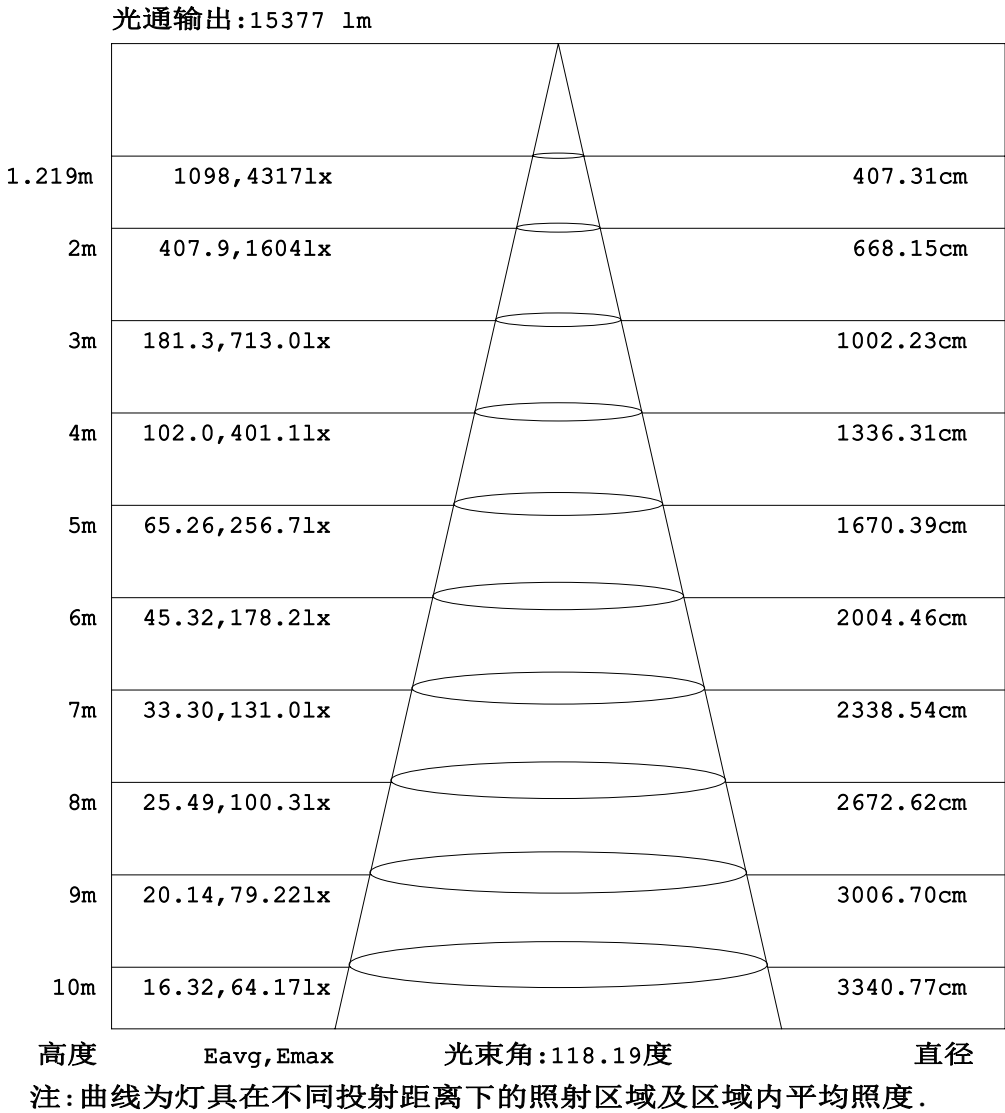


C角度范围: 0度 - 360度  
C角度间隔: 15.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: yanyonggeng  
测试日期: 2024-8-23

γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.363T  
环境湿度: 65.0%  
测试距离: 7.682米 [K=1.0000]  
备注:

## 平面等照度曲线

实测参数: U:219.3V I:0.4659A P:99.45W PF:0.9734 Freq:50.00Hz 实检光通:18645.3x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-100WHBE-NV-L2-00-4080-120D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

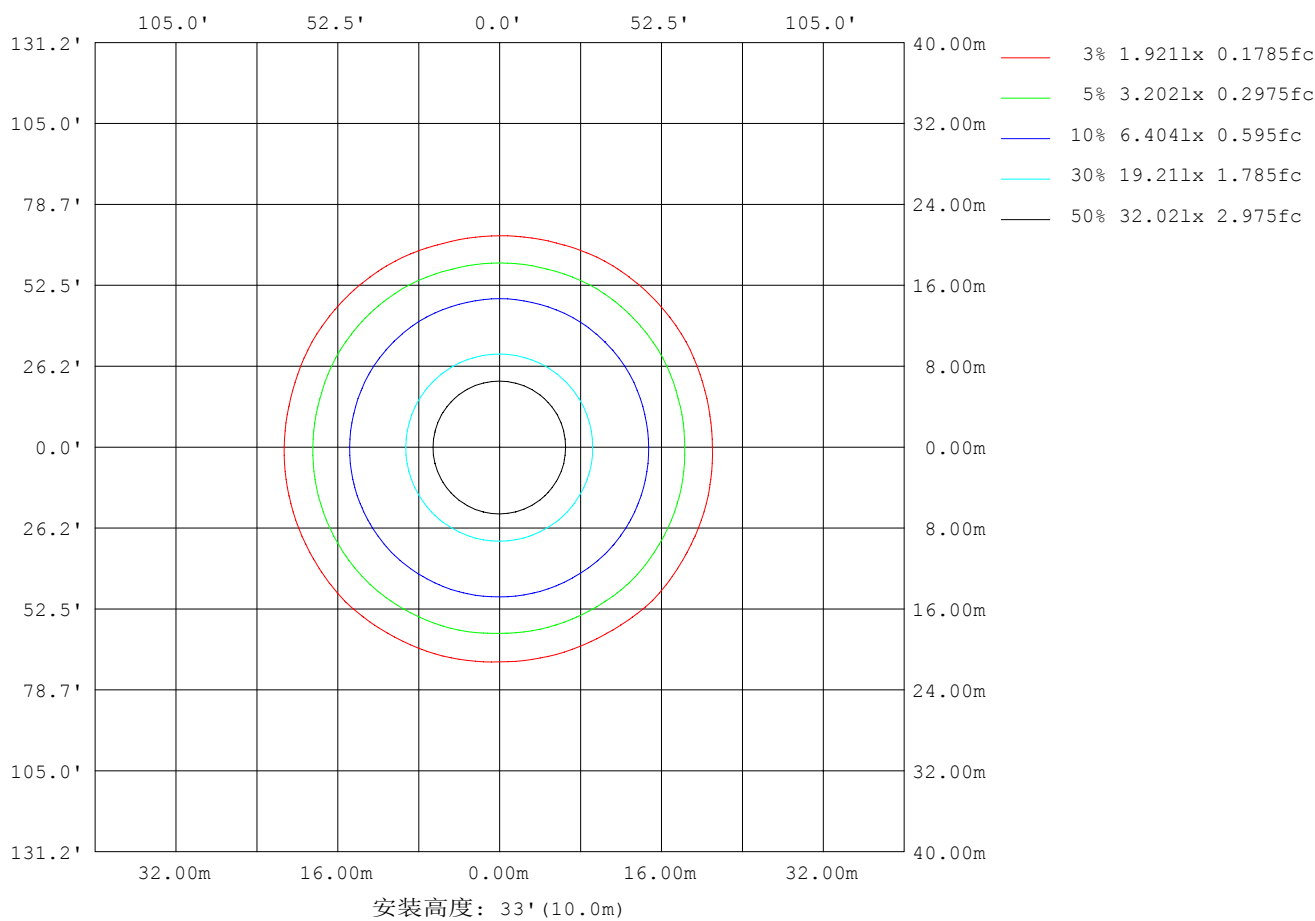

C角度范围: 0度 - 360度  
C角度间隔: 15.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: yanyonggeng  
测试日期: 2024-8-23

γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.363T  
环境湿度: 65.0%  
测试距离: 7.682米 [K=1.0000]  
备注:

## LED筒灯平均亮度报告

实测参数: U:219.3V I:0.4659A P:99.45W PF:0.9734 Freq:50.00Hz 实检光通:18645.3x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-100WHBE-NV-L2-00-4080-120D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:


平均亮度	数值 (cd/m <sup>2</sup> )
L横 (65) av	105443
L横 (75) av	52602
L横 (85) av	6961
L纵 (65) av	103256
L纵 (75) av	52875
L纵 (85) av	7166
L45 (65) av	108721
L45 (75) av	51337
L45 (85) av	7077

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度  
C角度间隔: 15.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: yanyonggeng  
测试日期: 2024-8-23

γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.363T  
环境湿度: 65.0%  
测试距离: 7.682米 [K=1.0000]  
备注:

## 平面照度曲线

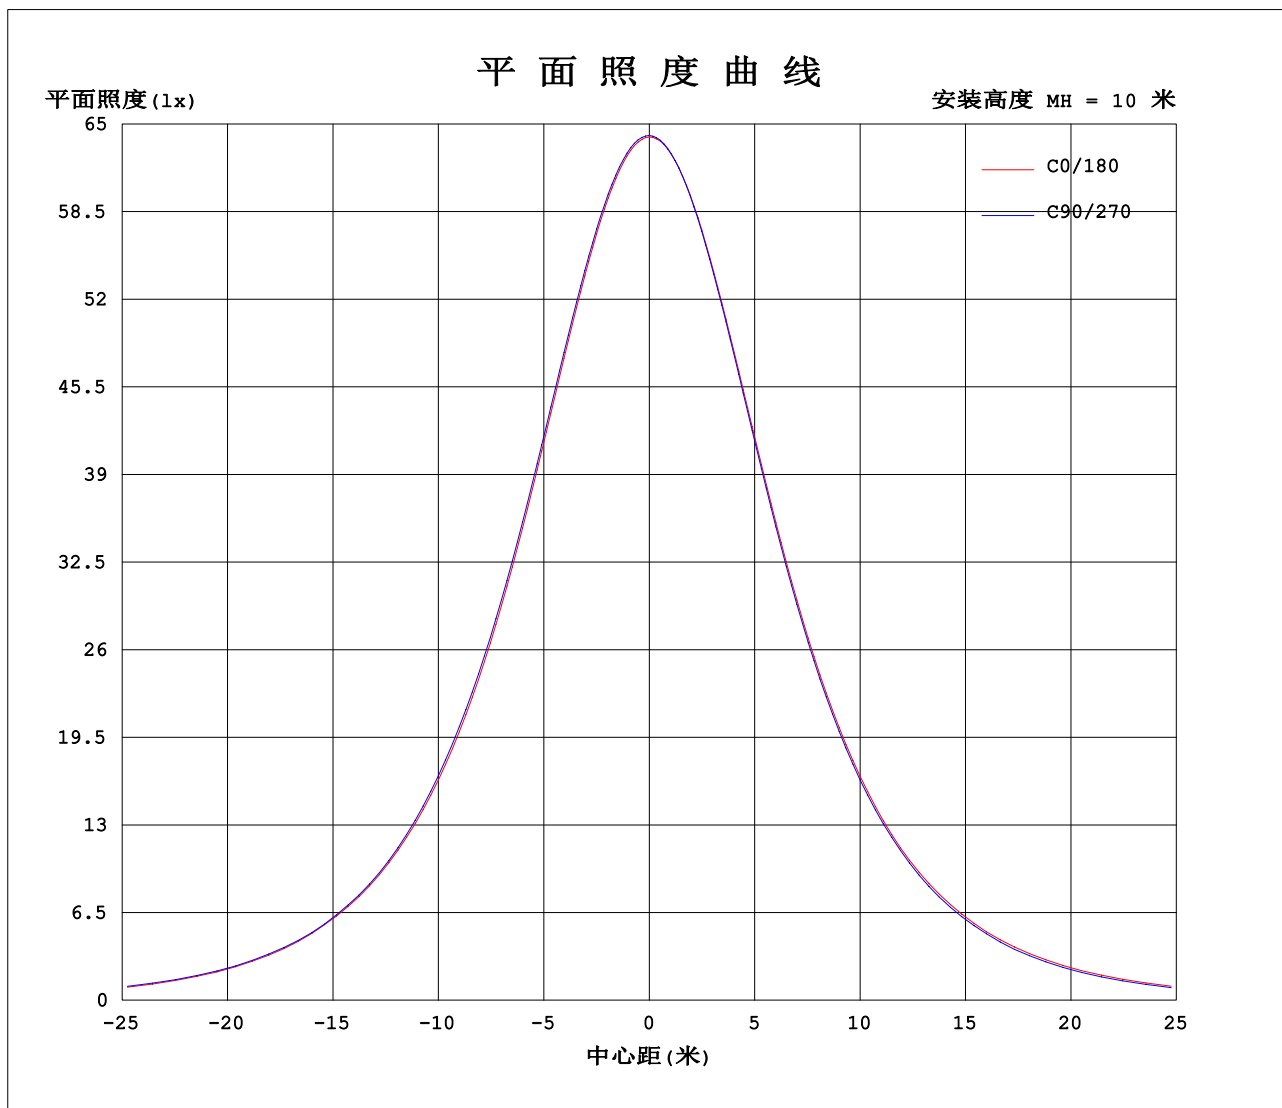

C角度范围: 0度 - 360度  
C角度间隔: 15.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: yanyonggeng  
测试日期: 2024-8-23

γ角度范围: 0度 - 180度  
γ角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.363T  
环境湿度: 65.0%  
测试距离: 7.682米 [K=1.0000]  
备注:

光强分布数据表格

实测参数: U:219.3V I:0.4659A P:99.45W PF:0.9734 Freq:50.00Hz 实检光通:18645.3x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-100WHBE-NV-L2-00-4080-120D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

表--1		单位: cd																		
C (DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	
0	6413	6413	6413	6413	6413	6413	6413	6413	6413	6413	6413	6413	6413	6413	6413	6413	6413	6413	6413	
5	6387	6388	6388	6392	6393	6396	6395	6398	6395	6398	6396	6396	6396	6393	6394	6390	6391	6389	6389	
10	6318	6324	6323	6330	6332	6337	6337	6341	6338	6340	6338	6339	6338	6333	6334	6328	6329	6323	6323	
15	6209	6216	6217	6228	6231	6240	6238	6244	6241	6244	6240	6241	6240	6233	6233	6225	6225	6216	6215	
20	6056	6067	6069	6082	6086	6098	6096	6104	6100	6105	6098	6100	6098	6089	6088	6078	6078	6066	6064	
25	5860	5873	5874	5891	5896	5912	5910	5920	5915	5921	5912	5915	5912	5901	5901	5887	5886	5869	5865	
30	5622	5638	5640	5659	5666	5684	5682	5694	5687	5693	5682	5685	5685	5672	5673	5655	5651	5632	5628	
35	5339	5358	5362	5383	5390	5410	5408	5421	5415	5419	5406	5408	5407	5393	5396	5375	5370	5347	5341	
40	5006	5030	5037	5059	5066	5088	5086	5101	5091	5097	5082	5083	5080	5066	5066	5045	5038	5011	5006	
45	4627	4656	4664	4691	4692	4715	4708	4732	4721	4730	4709	4710	4706	4689	4690	4666	4657	4626	4621	
50	4200	4235	4243	4270	4256	4272	4259	4295	4291	4310	4285	4278	4264	4248	4261	4231	4222	4186	4183	
55	3695	3735	3760	3781	3754	3753	3747	3780	3796	3828	3802	3788	3771	3750	3754	3734	3717	3659	3658	
60	3077	3145	3169	3210	3163	3148	3139	3202	3234	3269	3239	3206	3174	3135	3175	3149	3119	3036	3028	
65	2363	2428	2458	2533	2449	2450	2445	2522	2550	2610	2548	2515	2478	2435	2463	2429	2390	2291	2296	
70	1502	1536	1547	1653	1565	1604	1632	1691	1689	1770	1682	1660	1648	1570	1560	1537	1488	1425	1455	
75	672	647	645	747	688	737	795	797	756	830	757	777	807	718	681	691	672	649	691	
80	210	197	183	256	202	253	283	289	241	295	244	276	297	256	227	242	230	224	252	
85	13.2	13.3	14.7	22.4	19.0	28.8	43.2	44.2	40.8	55.4	39.3	46.3	52.7	39.2	37.3	44.4	32.3	19.9	24.6	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

C角度范围: 0度 - 360度  
C角度间隔: 15.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: yanyonggeng  
测试日期: 2024-8-23

$\gamma$ 角度范围: 0度 - 180度  
 $\gamma$ 角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.363T  
环境湿度: 65.0%  
测试距离: 7.682米 [K=1.0000]  
备注:

光 强 分 布 数 据 表 格

实测参数: U:219.3V I:0.4659A P:99.45W PF:0.9734 Freq:50.00Hz 实检光通:18645.3x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-100WHBE-NV-L2-00-4080-120D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi$ 263mm	遮光角:

表--2						单位: cd													
$\gamma$ (DEG) \ C (DEG)	285	300	315	330	345														
0	6413	6413	6413	6413	6413														
5	6387	6387	6386	6388	6387														
10	6318	6320	6317	6320	6317														
15	6208	6210	6206	6211	6207														
20	6056	6059	6053	6059	6054														
25	5855	5861	5856	5863	5856														
30	5614	5622	5617	5627	5619														
35	5327	5337	5331	5341	5334														
40	4992	5004	4997	5008	5000														
45	4608	4622	4615	4626	4619														
50	4168	4186	4179	4193	4190														
55	3646	3688	3684	3703	3682														
60	3031	3109	3112	3125	3071														
65	2310	2400	2411	2419	2355														
70	1423	1485	1512	1511	1470														
75	645	625	619	620	632														
80	214	186	192	171	190														
85	14.5	13.3	11.8	12.1	12.0														
90	0.00	0.00	0.00	0.00	0.00														
95	0.00	0.00	0.00	0.00	0.00														
100	0.00	0.00	0.00	0.00	0.00														
105	0.00	0.00	0.00	0.00	0.00														
110	0.00	0.00	0.00	0.00	0.00														
115	0.00	0.00	0.00	0.00	0.00														
120	0.00	0.00	0.00	0.00	0.00														
125	0.00	0.00	0.00	0.00	0.00														
130	0.00	0.00	0.00	0.00	0.00														
135	0.00	0.00	0.00	0.00	0.00														
140	0.00	0.00	0.00	0.00	0.00														
145	0.00	0.00	0.00	0.00	0.00														
150	0.00	0.00	0.00	0.00	0.00														
155	0.00	0.00	0.00	0.00	0.00														
160	0.00	0.00	0.00	0.00	0.00														
165	0.00	0.00	0.00	0.00	0.00														
170	0.00	0.00	0.00	0.00	0.00														
175	0.00	0.00	0.00	0.00	0.00														
180	0.00	0.00	0.00	0.00	0.00														

C角度范围: 0度 - 360度  
C角度间隔: 15.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: yanyonggeng  
测试日期: 2024-8-23

$\gamma$ 角度范围: 0度 - 180度  
 $\gamma$ 角度间隔: 1.0度  
测试系统: 远方 (EVERFINE) GO-2000A\_V1系统 V2.0.363T  
环境湿度: 65.0%  
测试距离: 7.682米 [K=1.0000]  
备注: