


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.2V I:0.9501A P:203.9W PF:0.9748 Lamp Flux:30259.5x1 lm		
NAME: oH High Bay Light	TYPE:LED	WEIGHT:6.0KG
SPEC.:AOK-200WoH	DIM.: $\phi 0.4 \times 0.141\text{m}$	SERIAL No.:1
MFR.: AOK	SUR.: $\phi 0.29\text{m}$	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 148.40 lm/W			
MODEL	3030	I _{max} (cd)	17399	S/MH (C0/180)	1.30
NOMINAL POWER (W)	200	LOR (%)	100.0	S/MH (C90/270)	1.29
RATED VOLTAGE (V)	220.0	TOTAL FLUX (lm)	30259	η UP, DN (C0-180)	0.1, 49.8
NOMINAL FLUX (lm)	30259.5	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 49.9
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	220	η down (%)	99.7	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

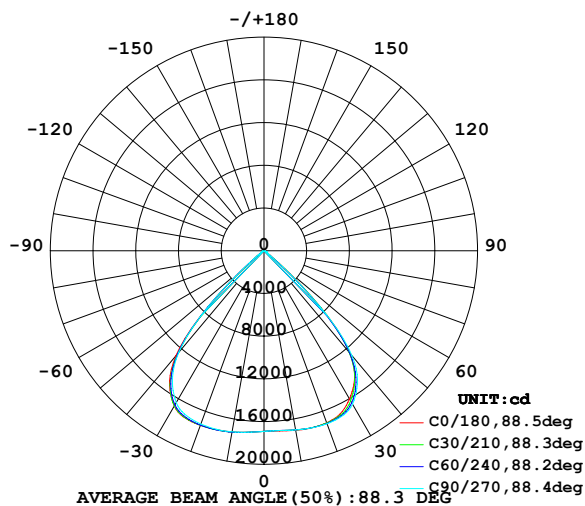

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

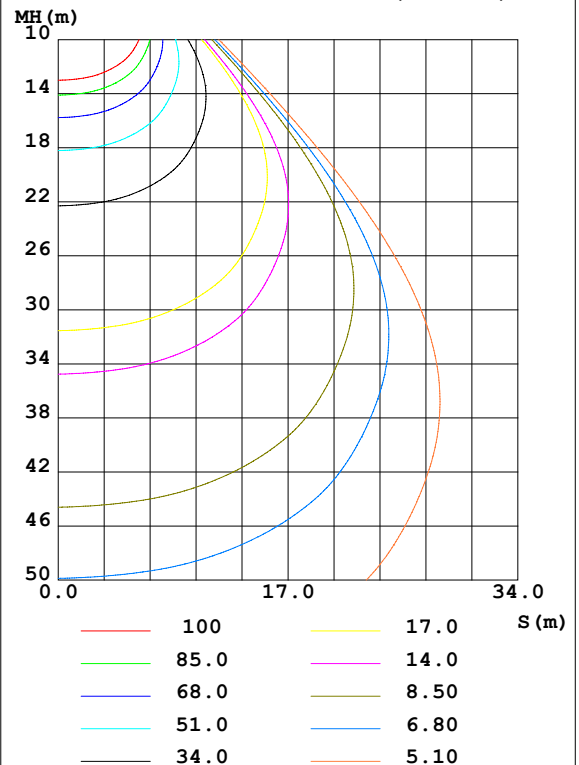

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:OUYANG
 Test Date:2017-11-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:7.633m [K=1.0088]
 Remarks: 3030

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	1708	1703	1704	1714	1722	1725	1722	1715	0- 10	1626	1626	5.37,5.37
20	1714	1719	1724	1733	1740	1738	1727	1716	10- 20	4887	6514	21.5,21.5
30	1602	1633	1658	1673	1680	1673	1642	1619	20- 30	7871	14385	47.5,47.5
40	1247	1242	1282	1289	1283	1254	1241	1240	30- 40	9327	23712	78.4,78.4
50	183.9	168.4	162.2	156.0	162.0	171.9	177.8	187.9	40- 50	5480	29192	96.5,96.5
60	33.65	32.24	32.26	32.04	31.88	31.87	33.10	33.86	50- 60	563.5	29756	98.3,98.3
70	20.22	19.17	19.08	18.90	18.79	18.90	19.70	20.18	60- 70	252.7	30008	99.2,99.2
80	8.723	7.980	7.490	7.385	7.354	7.935	8.308	8.764	70- 80	147.0	30155	99.7,99.7
90	0.0650	0.0625	0.0596	0.0621	0.0341	0.0353	0.0378	0.0355	80- 90	25.03	30180	99.7,99.7
100	0.0823	0.0819	0.0812	0.0832	0.0515	0.0505	0.0507	0.0497	90-100	0.6138	30181	99.7,99.7
110	0.1220	0.1219	0.1234	0.1264	0.0824	0.0801	0.0803	0.0787	100-110	0.8582	30182	99.7,99.7
120	0.5183	0.5177	0.5170	0.5310	0.3324	0.3214	0.3216	0.3132	110-120	2.055	30184	99.8,99.8
130	1.609	1.595	1.577	1.586	1.238	1.231	1.253	1.251	120-130	7.780	30192	99.8,99.8
140	2.770	2.750	2.718	2.707	2.295	2.305	2.343	2.354	130-140	15.26	30207	99.8,99.8
150	3.646	3.625	3.591	3.574	3.250	3.261	3.294	3.306	140-150	18.65	30226	99.9,99.9
160	4.196	4.186	4.155	4.132	4.005	4.025	4.061	4.084	150-160	17.57	30243	99.9,99.9
170	4.453	4.448	4.436	4.426	4.395	4.404	4.417	4.431	160-170	12.09	30255	100,100
180	4.501	4.498	4.496	4.504	4.502	4.497	4.499	4.503	170-180	4.267	30259	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:OUYANG
 Test Date:2017-11-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:7.633m [K=1.0088]
 Remarks: 3030

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.2V I:0.9501A P:203.9W PF:0.9748 Lamp Flux:30259.5x1 lm		
NAME: oH High Bay Light	TYPE:LED	WEIGHT:6.0KG
SPEC.:AOK-200WoH	DIM.: $\phi 0.4 \times 0.141\text{m}$	SERIAL No.:1
MFR.: AOK	SUR.: $\phi 0.29\text{m}$	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

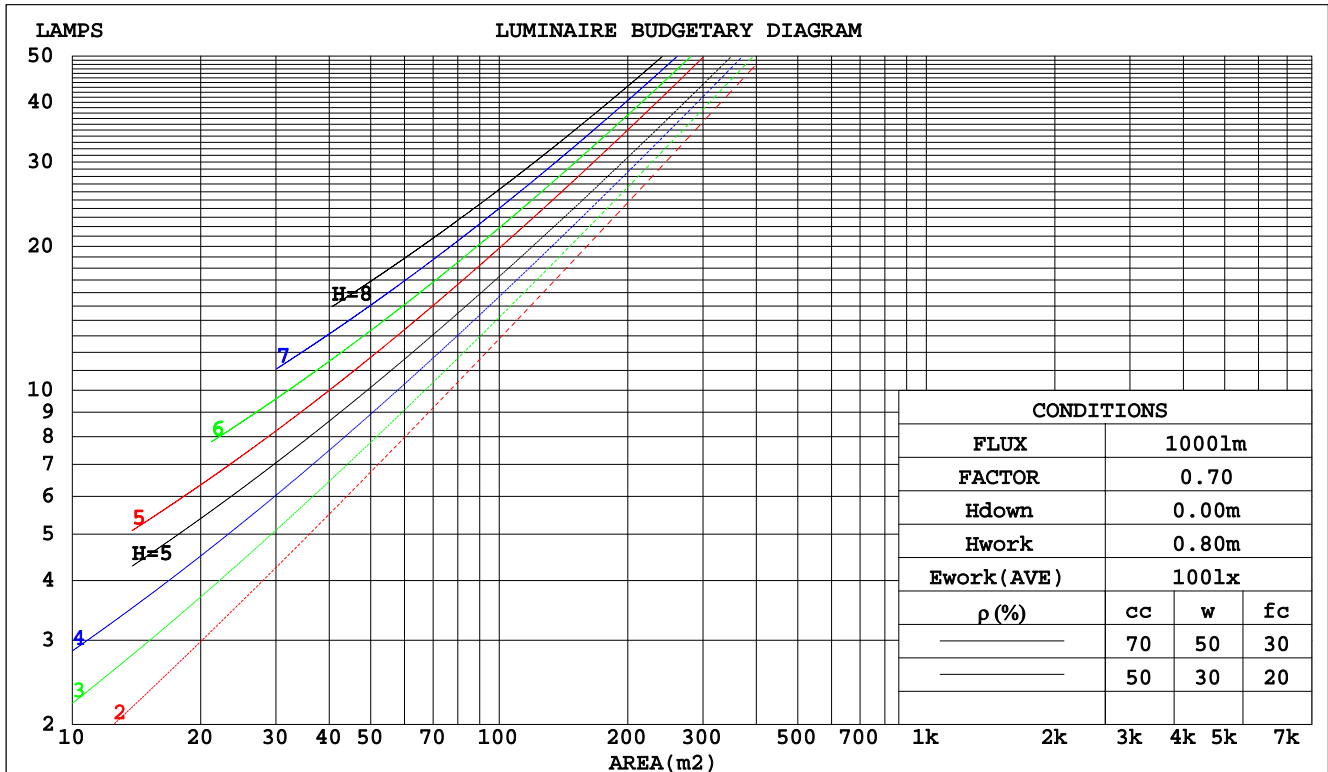

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:OUYANG
Test Date:2017-11-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:7.633m [K=1.0088]
Remarks: 3030

WEC AND CCEC

Test:U:220.2V I:0.9501A P:203.9W PF:0.9748 Lamp Flux:30259.5x1 lm					
NAME: oH High Bay Light			TYPE:LED		WEIGHT:6.0KG
SPEC.:AOK-200WoH			DIM.: ϕ 0.4*0.141m		SERIAL No.:1
MFR.: AOK			SUR.: ϕ 0.29m		PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.205	.117	.037	.198	.113	.036	.185	.106	.034	.174	.100	.032	.163	.094	.030	
2.0	.199	.109	.034	.194	.107	.033	.183	.102	.032	.172	.097	.030	.163	.092	.029	
3.0	.191	.102	.031	.186	.100	.030	.177	.096	.029	.168	.092	.028	.160	.089	.027	
4.0	.183	.095	.028	.179	.093	.028	.170	.090	.027	.163	.087	.026	.155	.084	.026	
5.0	.175	.089	.026	.171	.088	.026	.163	.085	.025	.157	.083	.025	.150	.080	.024	
6.0	.167	.084	.024	.163	.082	.024	.157	.080	.023	.151	.078	.023	.145	.076	.023	
7.0	.159	.079	.022	.156	.078	.022	.150	.076	.022	.145	.074	.022	.140	.072	.021	
8.0	.152	.074	.021	.149	.073	.021	.144	.072	.021	.139	.070	.020	.134	.069	.020	
9.0	.145	.070	.020	.143	.070	.020	.138	.068	.019	.133	.067	.019	.129	.066	.019	
10.0	.139	.067	.018	.137	.066	.018	.132	.065	.018	.128	.064	.018	.124	.063	.018	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.175	.159	.145	.150	.137	.124	.102	.094	.086	.059	.054	.050	.019	.017	.016	
2.0	.162	.134	.111	.139	.116	.096	.095	.080	.067	.055	.047	.039	.018	.015	.013	
3.0	.151	.116	.087	.130	.100	.076	.089	.069	.053	.051	.041	.031	.017	.013	.010	
4.0	.143	.102	.070	.122	.088	.061	.084	.061	.043	.049	.036	.025	.016	.012	.008	
5.0	.135	.090	.057	.116	.078	.050	.080	.055	.035	.046	.032	.021	.015	.010	.007	
6.0	.128	.082	.048	.110	.071	.042	.076	.049	.030	.044	.029	.018	.014	.010	.006	
7.0	.122	.074	.041	.105	.064	.035	.073	.045	.025	.042	.027	.015	.014	.009	.005	
8.0	.117	.068	.035	.101	.059	.031	.070	.042	.022	.041	.025	.013	.013	.008	.004	
9.0	.112	.064	.031	.097	.055	.027	.067	.039	.019	.039	.023	.011	.013	.008	.004	
10.0	.108	.059	.027	.093	.051	.024	.064	.036	.017	.038	.021	.010	.012	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:OUYANG
Test Date:2017-11-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:7.633m [K=1.0088]
Remarks: 3030

UGR(Unified Glare Rating) Table

Test:U:220.2V I:0.9501A P:203.9W PF:0.9748 Lamp Flux:30259.5x1 lm											
NAME: oH High Bay Light					TYPE:LED			WEIGHT:6.0KG			
SPEC.:AOK-200WoH					DIM.: $\phi 0.4*0.141m$			SERIAL No.:1			
MFR.: AOK					SUR.: $\phi 0.29m$			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	24.9	26.1	25.2	26.3	26.5	25.0	26.1	25.2	26.3	26.5
	3H	24.8	25.8	25.1	26.0	26.3	24.8	25.8	25.1	26.1	26.3
	4H	24.7	25.7	25.0	25.9	26.2	24.7	25.7	25.0	25.9	26.2
	6H	24.6	25.6	24.9	25.8	26.1	24.6	25.6	25.0	25.8	26.1
	8H	24.6	25.5	24.9	25.7	26.0	24.6	25.5	24.9	25.7	26.0
	12H	24.5	25.4	24.9	25.7	26.0	24.6	25.4	24.9	25.7	26.0
4H	2H	24.7	25.7	25.0	25.9	26.1	24.7	25.7	25.0	25.9	26.2
	3H	24.5	25.4	24.9	25.7	25.9	24.5	25.4	24.9	25.7	26.0
	4H	24.5	25.2	24.8	25.5	25.9	24.5	25.2	24.8	25.6	25.9
	6H	24.4	25.1	24.8	25.4	25.8	24.4	25.1	24.8	25.4	25.8
	8H	24.4	25.0	24.8	25.3	25.7	24.4	25.0	24.8	25.3	25.7
	12H	24.3	24.9	24.7	25.3	25.7	24.3	24.9	24.7	25.3	25.7
8H	4H	24.3	25.0	24.8	25.3	25.7	24.4	25.0	24.8	25.3	25.7
	6H	24.3	24.8	24.7	25.2	25.6	24.3	24.8	24.7	25.2	25.6
	8H	24.3	24.7	24.7	25.1	25.6	24.3	24.7	24.7	25.1	25.6
	12H	24.2	24.6	24.7	25.0	25.5	24.2	24.6	24.7	25.0	25.5
12H	4H	24.3	24.9	24.7	25.2	25.6	24.3	24.9	24.7	25.3	25.7
	6H	24.3	24.7	24.7	25.1	25.6	24.3	24.7	24.7	25.1	25.6
	8H	24.2	24.6	24.7	25.0	25.5	24.2	24.6	24.7	25.0	25.5
Variations with the observer position at spacings:											
S = 1.0H	+ 2.8 / -10.2					+ 2.7 / -10.7					
1.5H	+ 3.6 / -10.6					+ 3.7 / -10.9					
2.0H	+ 7.5 / - 7.2					+ 7.8 / - 7.2					

CIE Pub.117 Corrected 30259 lm Total Lamp Luminous Flux.(8log(F/F0) = 11.8)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:OUYANG
Test Date:2017-11-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:7.633m [K=1.0088]
Remarks: 3030

UTILIZATION FACTORS TABLE

Test:U:220.2V I:0.9501A P:203.9W PF:0.9748 Lamp Flux:30259.5x1 lm		
NAME: oH High Bay Light	TYPE:LED	WEIGHT:6.0KG
SPEC.:AOK-200WoH	DIM.: $\phi 0.4 \times 0.141m$	SERIAL No.:1
MFR.: AOK	SUR.: $\phi 0.29m$	PROTECTION ANGLE:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	78	70	65	77	70	65	76	69	65	60
0.80	87	79	75	86	79	75	85	78	74	69
1.00	93	86	82	92	86	81	91	86	81	76
1.25	98	92	88	97	91	87	95	90	87	82
1.50	102	96	92	101	95	91	98	94	90	85
2.00	106	101	97	104	100	96	101	98	95	89
2.50	108	103	100	106	102	99	103	100	97	90
3.00	110	106	102	108	104	101	104	101	99	92
4.00	112	109	106	110	107	105	106	104	102	94
5.00	113	111	108	111	109	107	107	105	103	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:OUYANG
Test Date:2017-11-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:7.633m [K=1.0088]
Remarks: 3030

ISOCANDELA DIAGRAM

Test:U:220.2V I:0.9501A P:203.9W PF:0.9748 Lamp Flux:30259.5x1 lm		
NAME: oH High Bay Light	TYPE:LED	WEIGHT:6.0KG
SPEC.:AOK-200WoH	DIM.: $\phi 0.4 \times 0.141\text{m}$	SERIAL No.:1
MFR.: AOK	SUR.: $\phi 0.29\text{m}$	PROTECTION ANGLE:

Conical surface Flux(90deg):

27497 lm

%lum = 90.9%


%lamp = 90.9%

Conical surface Flux(120deg):

29756 lm

%lum = 98.3%

%lamp = 98.3%

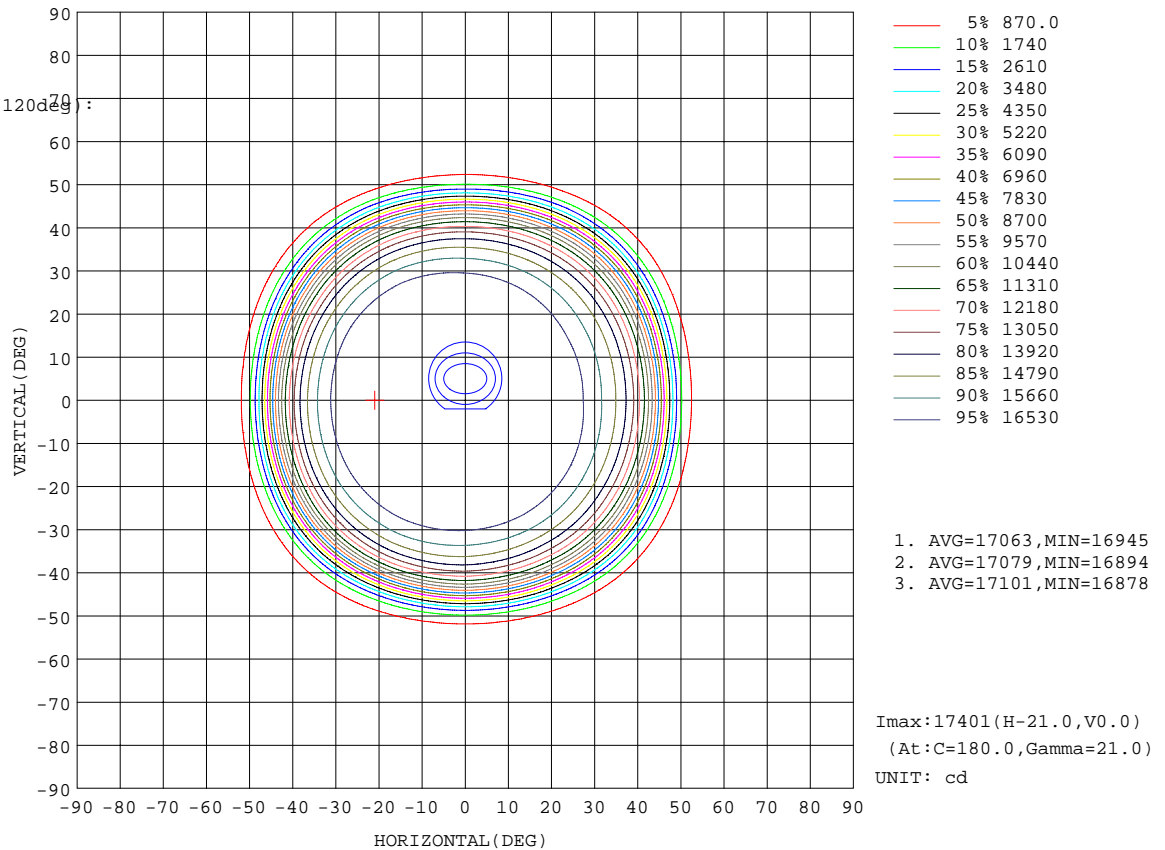


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:OUYANG
Test Date:2017-11-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:7.633m [K=1.0088]
Remarks: 3030

AAI Figure

Test:U:220.2V I:0.9501A P:203.9W PF:0.9748 Lamp Flux:30259.5x1 lm		
NAME: oH High Bay Light	TYPE:LED	WEIGHT:6.0KG
SPEC.:AOK-200WoH	DIM.: $\phi 0.4 \times 0.141\text{m}$	SERIAL No.:1
MFR.: AOK	SUR.: $\phi 0.29\text{m}$	PROTECTION ANGLE:

Flux out:27497 lm

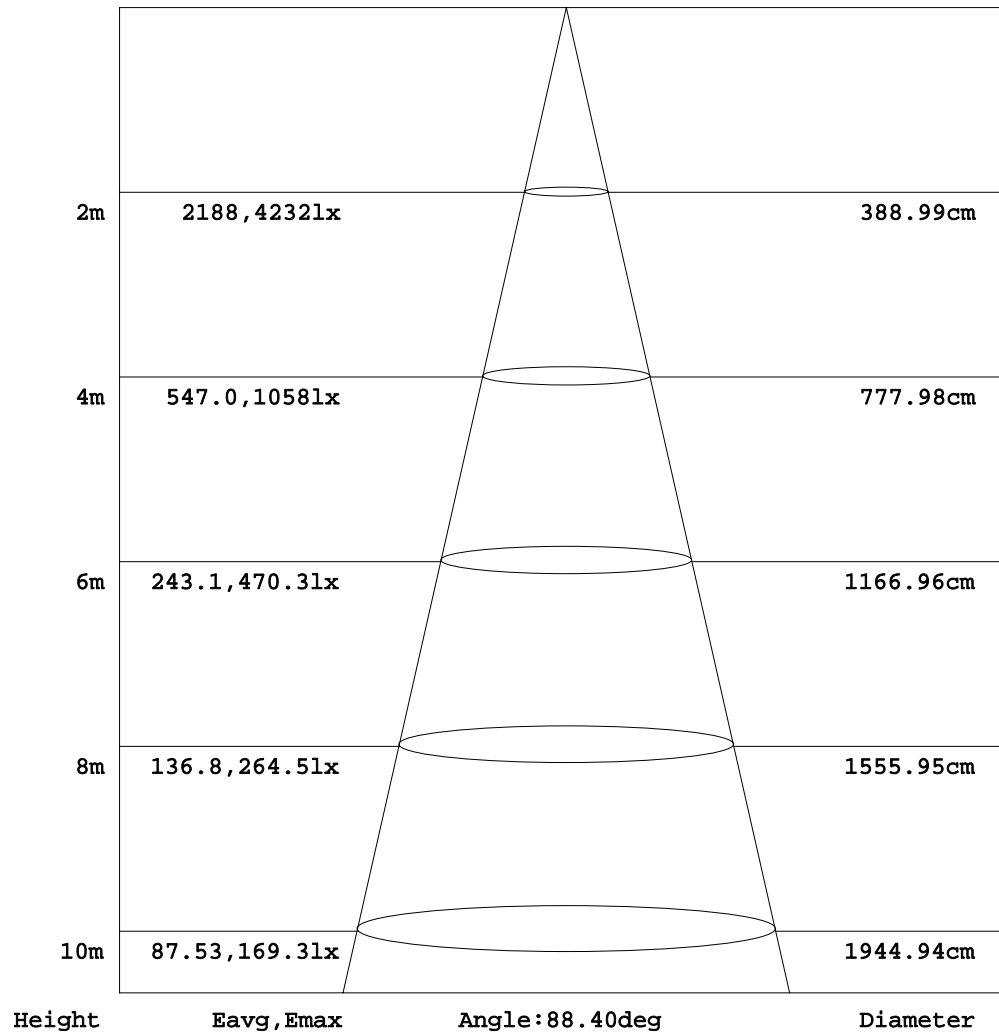


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: OUYANG
 Test Date: 2017-11-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 7.633m [K=1.0088]
 Remarks: 3030

ISOLUX DIAGRAM

Test:U:220.2V I:0.9501A P:203.9W PF:0.9748 Lamp Flux:30259.5x1 lm		
NAME: oH High Bay Light	TYPE:LED	WEIGHT:6.0KG
SPEC.:AOK-200WoH	DIM.: $\phi 0.4 \times 0.141\text{m}$	SERIAL No.:1
MFR.: AOK	SUR.: $\phi 0.29\text{m}$	PROTECTION ANGLE:

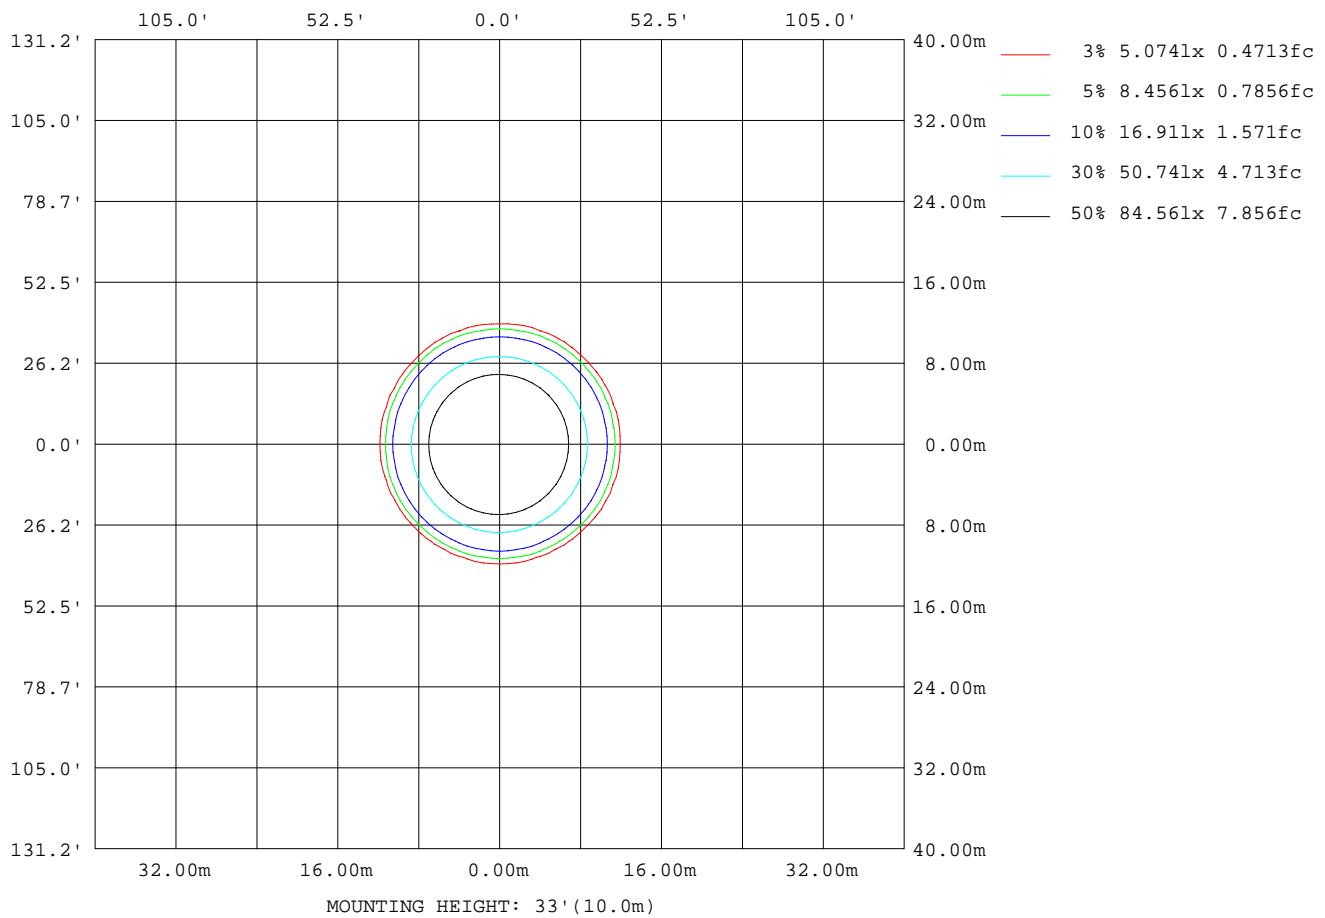

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:OUYANG
Test Date:2017-11-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:7.633m [K=1.0088]
Remarks: 3030

LED Avg.L Report

Test:U:220.2V I:0.9501A P:203.9W PF:0.9748 Lamp Flux:30259.5x1 lm		
NAME: oH High Bay Light	TYPE:LED	WEIGHT:6.0KG
SPEC.:AOK-200WoH	DIM.: $\phi 0.4 \times 0.141m$	SERIAL No.:1
MFR.: AOK	SUR.: $\phi 0.29m$	PROTECTION ANGLE:


AvgL	cd/m2
L_0~180 (65) av	6047
L_0~180 (75) av	5450
L_0~180 (85) av	1519
L_90~270 (65) av	6032
L_90~270 (75) av	5413
L_90~270 (85) av	1475
L_45 (65) av	5981
L_45 (75) av	5413
L_45 (85) av	1507

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:OUYANG
Test Date:2017-11-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:7.633m [K=1.0088]
Remarks: 3030

Planar Illuminance Curve

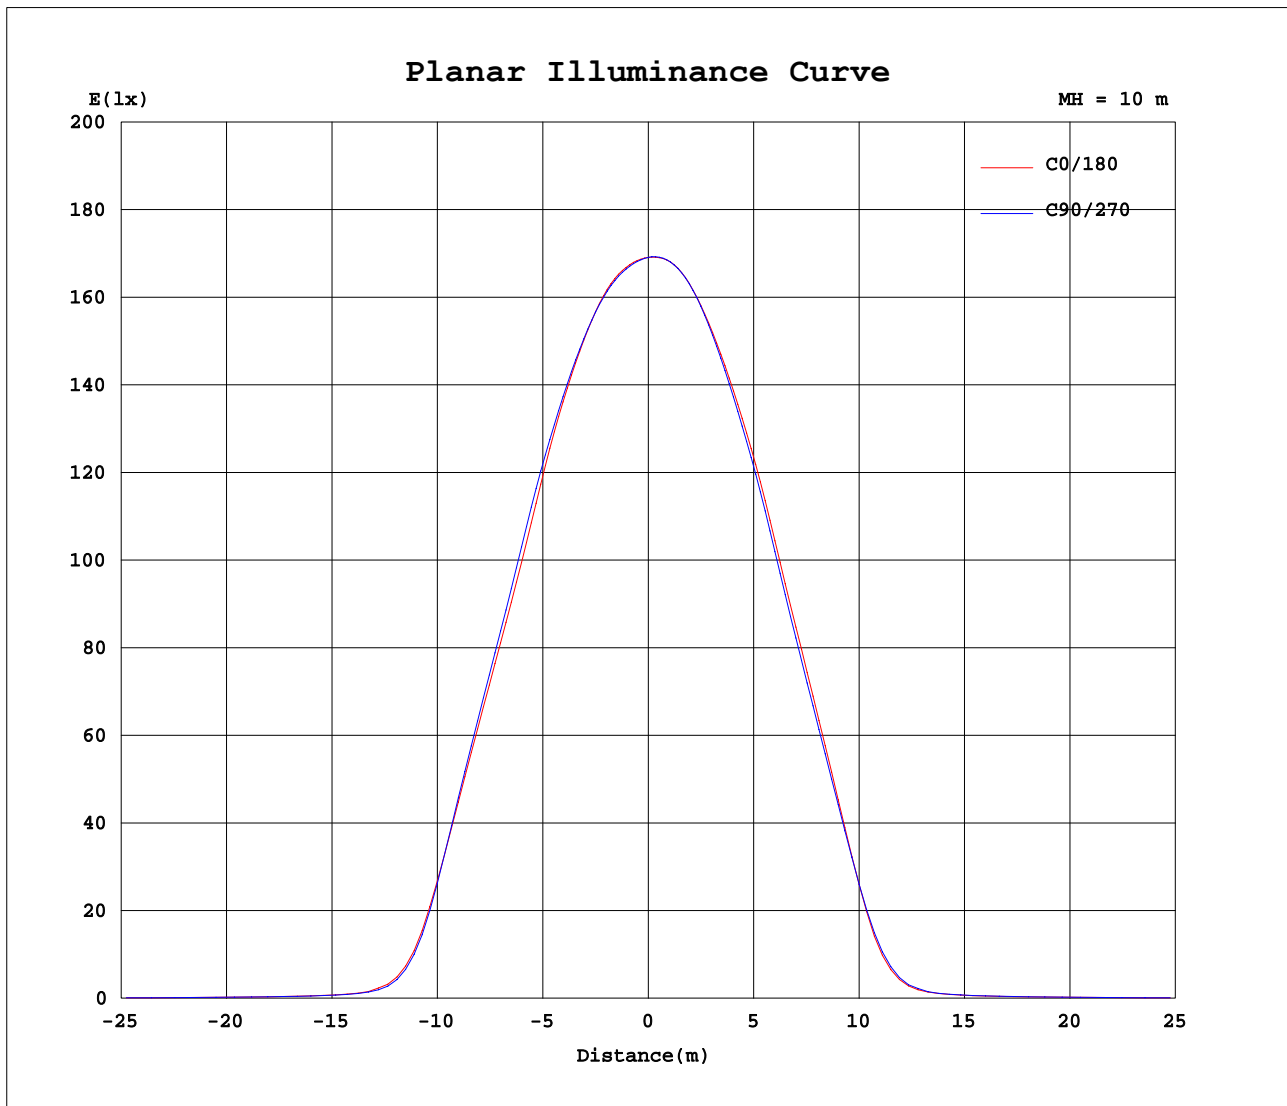

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: OUYANG
Test Date: 2017-11-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity: 65.0%
Test Distance: 7.633m [K=1.0088]
Remarks: 3030

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.2V I:0.9501A P:203.9W PF:0.9748 Lamp Flux:30259.5x1 lm		
NAME: oH High Bay Light	TYPE:LED	WEIGHT:6.0KG
SPEC.:AOK-200WoH	DIM.: $\phi 0.4 \times 0.141m$	SERIAL No.:1
MFR.: AOK	SUR.: $\phi 0.29m$	PROTECTION ANGLE:

Table--1

UNIT: $\times 10cd$

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1691	1691	1691	1691	1691	1691	1691	1691	1691	1691	1691	1691						
5	1694	1690	1689	1690	1695	1700	1704	1707	1707	1705	1701	1697						
10	1708	1703	1703	1704	1710	1717	1722	1725	1725	1722	1717	1713						
15	1717	1716	1717	1718	1725	1730	1733	1735	1736	1730	1724	1720						
20	1714	1716	1721	1724	1730	1737	1740	1739	1738	1727	1717	1714						
25	1687	1697	1706	1714	1719	1729	1733	1730	1724	1707	1693	1687						
30	1602	1623	1643	1658	1670	1676	1680	1679	1668	1642	1628	1609						
35	1477	1483	1503	1525	1543	1549	1541	1534	1522	1496	1487	1481						
40	1247	1239	1246	1282	1290	1288	1283	1253	1254	1241	1238	1243						
45	758	748	721	743	732	731	735	718	742	736	747	759						
50	184	179	158	162	156	156	162	165	179	178	186	189						
55	50.4	49.3	46.6	47.5	47.2	46.9	47.1	46.5	48.3	49.3	50.8	51.0						
60	33.7	32.9	31.6	32.3	32.2	31.9	31.9	31.6	32.1	33.1	33.9	33.9						
65	26.3	25.6	24.6	25.2	25.1	24.8	24.8	24.5	25.0	25.8	26.3	26.5						
70	20.2	19.6	18.8	19.1	19.1	18.7	18.8	18.8	19.0	19.7	20.1	20.3						
75	14.7	14.3	13.7	13.7	13.6	13.5	13.5	13.7	13.9	14.3	14.6	14.8						
80	8.72	8.43	7.52	7.49	7.46	7.31	7.35	7.72	8.15	8.31	8.70	8.83						
85	1.45	1.41	1.26	1.18	1.09	1.12	1.20	1.31	1.42	1.39	1.43	1.45						
90	0.06	0.06	0.06	0.06	0.06	0.06	0.03	0.04	0.03	0.04	0.03	0.04						
95	0.07	0.07	0.07	0.07	0.07	0.07	0.04	0.04	0.04	0.04	0.04	0.04						
100	0.08	0.08	0.08	0.08	0.08	0.08	0.05	0.05	0.05	0.05	0.05	0.05						
105	0.10	0.09	0.10	0.10	0.10	0.10	0.06	0.06	0.06	0.06	0.06	0.06						
110	0.12	0.12	0.12	0.12	0.13	0.13	0.08	0.08	0.08	0.08	0.08	0.08						
115	0.23	0.22	0.24	0.23	0.24	0.24	0.14	0.14	0.13	0.13	0.13	0.13						
120	0.52	0.51	0.53	0.52	0.53	0.53	0.33	0.33	0.31	0.32	0.31	0.31						
125	1.00	0.99	1.01	0.99	1.00	1.00	0.72	0.72	0.70	0.72	0.71	0.71						
130	1.61	1.59	1.60	1.58	1.59	1.59	1.24	1.24	1.22	1.25	1.25	1.25						
135	2.21	2.19	2.20	2.17	2.17	2.16	1.78	1.79	1.78	1.81	1.82	1.82						
140	2.77	2.75	2.75	2.72	2.71	2.70	2.30	2.31	2.30	2.34	2.35	2.36						
145	3.22	3.21	3.20	3.17	3.16	3.15	2.75	2.76	2.77	2.80	2.81	2.81						
150	3.65	3.62	3.63	3.59	3.58	3.57	3.25	3.26	3.26	3.29	3.30	3.31						
155	3.98	3.96	3.96	3.93	3.91	3.90	3.70	3.71	3.72	3.76	3.77	3.78						
160	4.20	4.19	4.18	4.15	4.14	4.12	4.00	4.02	4.03	4.06	4.08	4.09						
165	4.35	4.35	4.34	4.32	4.31	4.30	4.22	4.24	4.24	4.26	4.28	4.29						
170	4.45	4.45	4.45	4.44	4.43	4.42	4.40	4.40	4.40	4.42	4.43	4.43						
175	4.49	4.49	4.49	4.49	4.49	4.48	4.49	4.48	4.49	4.49	4.50	4.50						
180	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50	4.50						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:OUYANG
Test Date:2017-11-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.291
Humidity:65.0%
Test Distance:7.633m [K=1.0088]
Remarks: 3030