


室内灯具光度数据

实测参数: U:219.4V I:0.5611A P:120.6W PF:0.9797 Freq:50.01Hz 实检光通:19995.9x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-3080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: Φ 263mm	遮光角:

光源数据		光度数据				光效: 165.83 lm/W
型号	2835	峰值光强(cd)	15347	S/MH(C0/180)	0.98	
标称功率(W)	120	灯具效率(%)	100.0	S/MH(C90/270)	0.99	
额定电源电压(V)	220	总光通量(lm)	19996	η UP,DN(C0-180)	0.0,50.0	
额定光通量(lm)	19995.9	CIE分类	直接	η UP,DN(C180-360)	0.0,50.0	
灯具内光源数(只)	1	上射光通比(%)	0.0	CIBSE SHR NOM	1.00	
实测电源电压(V)	220	下射光通比(%)	100.0	CIBSE SHR MAX	1.00	

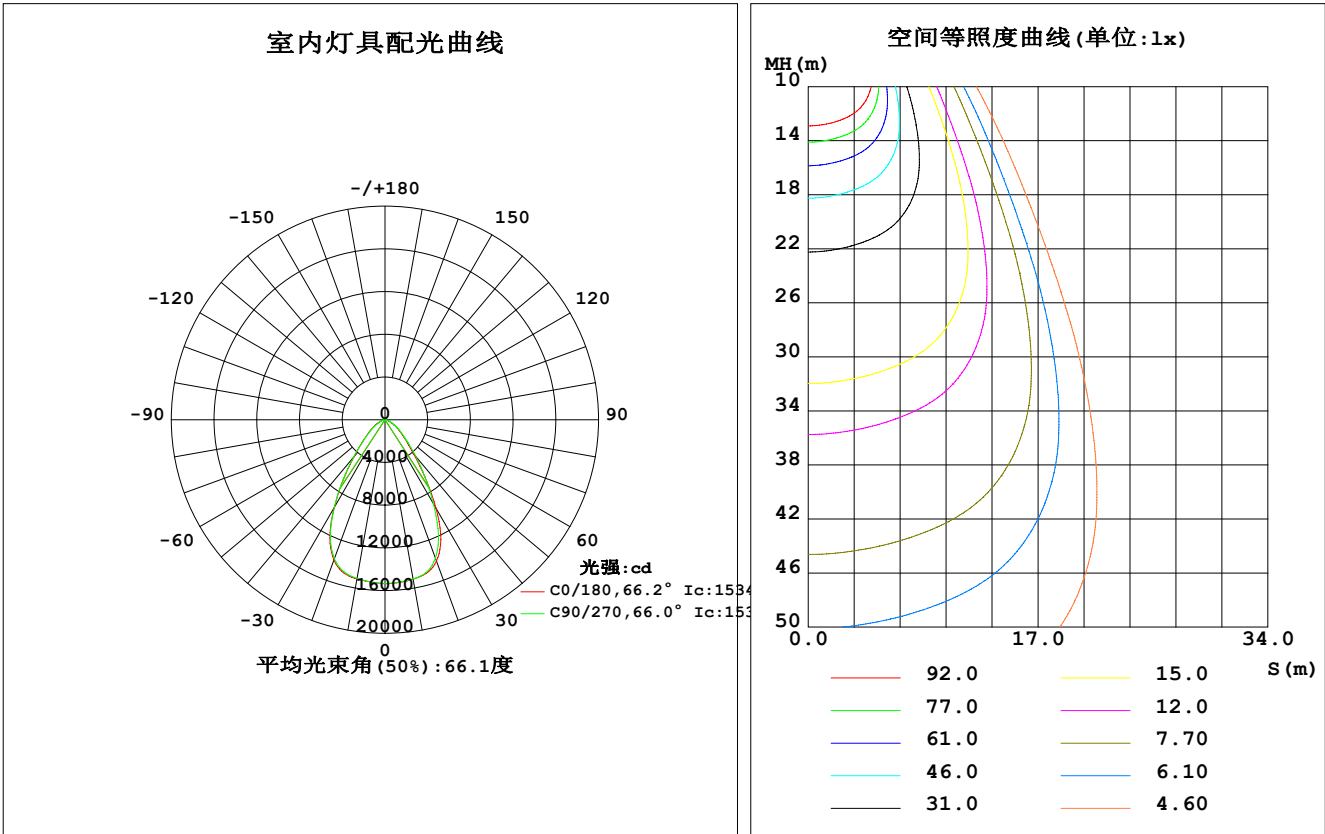

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度:25.3℃
测试人员:yanyonggeng
测试日期:2024-10-26

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.363T
环境湿度:65.0%
测试距离:7.682米 [K=1.0000]
备注:

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	1516	1517	1513	1511	1513	1508	1508	1514	0- 10	1453	1453	7.27, 7.27
20	1409	1403	1380	1385	1398	1392	1385	1392	10- 20	4158	5610	28.1, 28.1
30	955.1	927.5	906.6	925.7	954.2	961.8	949.4	932.9	20- 30	5473	11083	55.4, 55.4
40	418.7	436.0	449.6	457.2	451.8	435.6	457.2	444.8	30- 40	4161	15244	76.2, 76.2
50	202.3	217.3	217.5	223.3	215.7	207.8	210.4	207.3	40- 50	2378	17622	88.1, 88.1
60	100.1	108.8	107.8	112.1	107.6	105.0	103.6	101.3	50- 60	1374	18996	95, 95
70	40.08	44.76	43.62	46.96	43.86	42.96	41.28	40.43	60- 70	697.6	19694	98.5, 98.5
80	11.30	12.51	14.39	15.71	13.85	12.75	11.50	9.908	70- 80	261.6	19955	99.8, 99.8
90	0	0	0	0	0	0	0	0	80- 90	40.83	19996	100, 100
100	0	0	0	0	0	0	0	0	90-100	0	19996	100, 100
110	0	0	0	0	0	0	0	0	100-110	0	19996	100, 100
120	0	0	0	0	0	0	0	0	110-120	0	19996	100, 100
130	0	0	0	0	0	0	0	0	120-130	0	19996	100, 100
140	0	0	0	0	0	0	0	0	130-140	0	19996	100, 100
150	0	0	0	0	0	0	0	0	140-150	0	19996	100, 100
160	0	0	0	0	0	0	0	0	150-160	0	19996	100, 100
170	0	0	0	0	0	0	0	0	160-170	0	19996	100, 100
180	0	0	0	0	0	0	0	0	170-180	0	19996	100, 100
单位:°	光强:×10cd									单位:lm		

锥面光通量(90度)：16598 lm

%lum = 83.0%

%lamp = 83.0%

锥面光通量(120度)：18996 lm

%lum = 95.0%


%lamp = 95.0%

C角度范围： 0度 - 360度
C角度间隔：15.0度
测试速度：快速
环境温度:25.3℃
测试人员:yanyonggeng
测试日期:2024-10-26

γ角度范围： 0度 - 180度
γ角度间隔： 1.0度
测试系统：远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度:65.0%
测试距离:7.682米 [K=1.0000]
备注：

灯具亮度限制曲线

实测参数: U:219.4V I:0.5611A P:120.6W PF:0.9797 Freq:50.01Hz 实检光通:19995.9x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-3080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

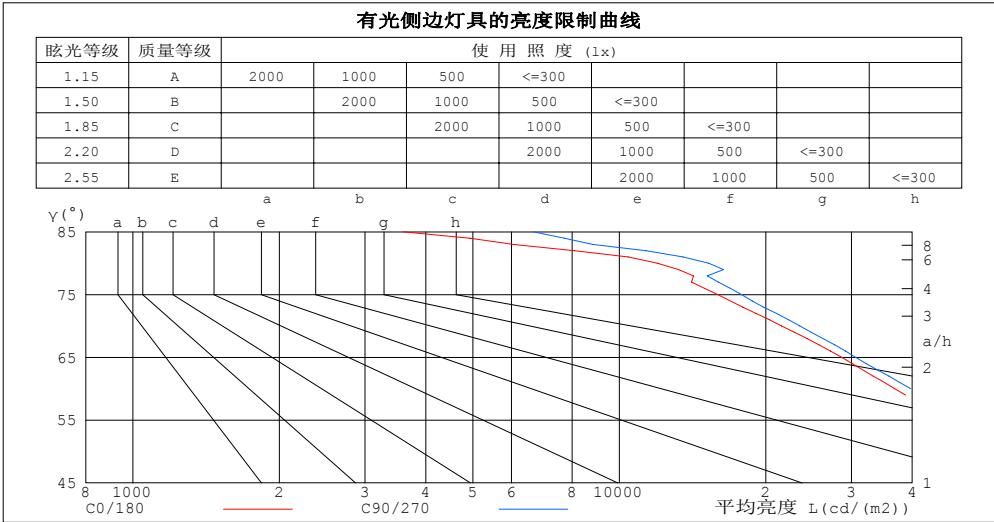

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	3598	6660
80	11970	15263
75	15925	17833
70	21554	23486
65	28643	30611
60	36828	39713
55	46666	50040
50	57875	62309
45	73899	80091


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:219.4V I:0.5611A P:120.6W PF:0.9797 Freq:50.01Hz 实检光通:19995.9x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-3080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.09	1.06	1.03	1.07	1.04	1.02	1.03	1.00	.98	.99	.97	.96	.95	.94	.93	.91
2.0	.99	.95	.91	.98	.93	.89	.94	.91	.87	.91	.88	.86	.88	.86	.84	.82
3.0	.91	.85	.80	.90	.84	.80	.87	.82	.78	.84	.80	.77	.82	.79	.76	.74
4.0	.84	.77	.72	.82	.76	.72	.80	.75	.71	.78	.73	.70	.76	.72	.69	.67
5.0	.77	.70	.65	.76	.70	.65	.74	.69	.64	.72	.67	.64	.71	.66	.63	.61
6.0	.71	.64	.59	.71	.64	.59	.69	.63	.59	.67	.62	.58	.66	.61	.58	.56
7.0	.66	.59	.54	.66	.59	.54	.64	.58	.54	.63	.58	.54	.62	.57	.53	.52
8.0	.62	.55	.50	.61	.55	.50	.60	.54	.50	.59	.54	.50	.58	.53	.49	.48
9.0	.58	.51	.46	.57	.51	.46	.56	.50	.46	.55	.50	.46	.54	.49	.46	.44
10.0	.54	.48	.43	.54	.47	.43	.53	.47	.43	.52	.47	.43	.51	.46	.43	.41

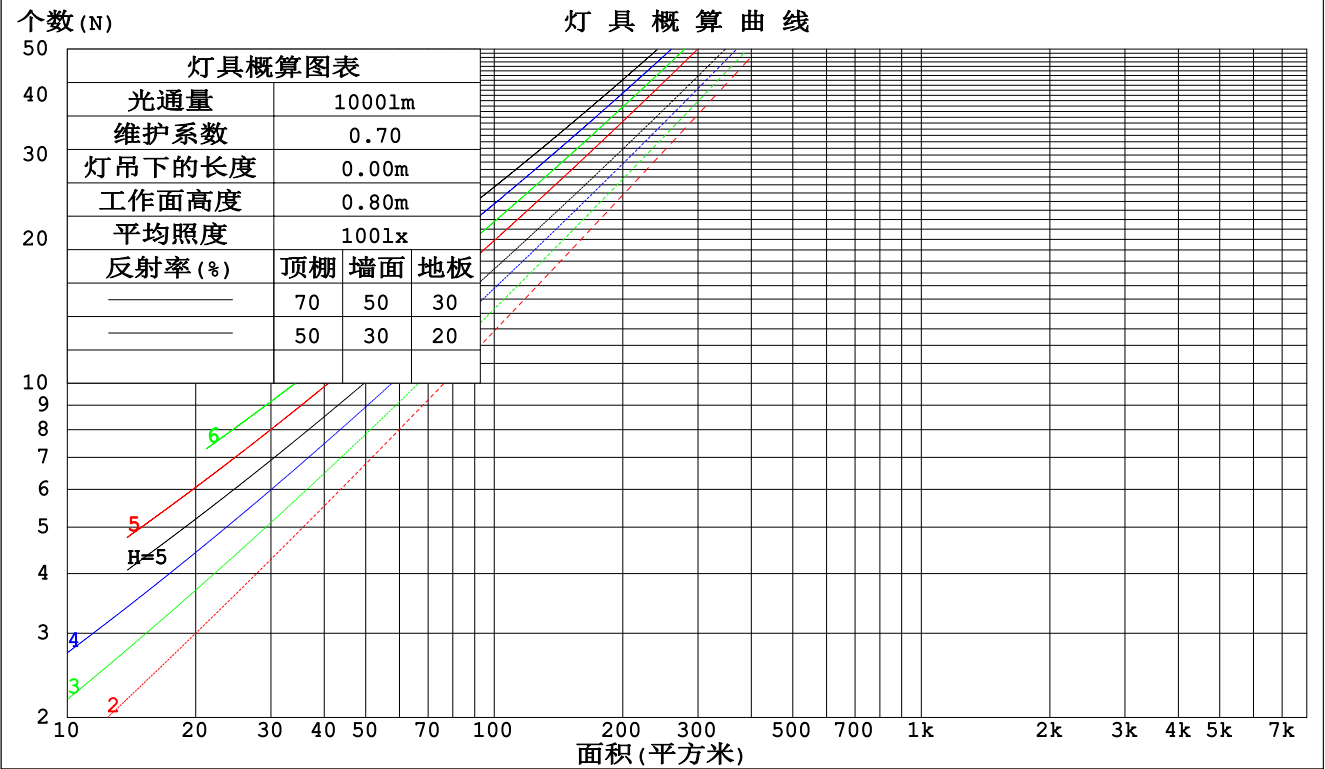

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:219.4V I:0.5611A P:120.6W PF:0.9797 Freq:50.01Hz 实检光通:19995.9x1 lm					
灯具名称: AOK HBE			灯具类型:		灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-3080-60D-P			外型尺寸:		测试编号:
制造厂商: AOK			发光口面: Φ263mm		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.213	.121	.038	.206	.118	.037	.193	.111	.035	.182	.105	.034	.171	.099	.032	
2.0	.206	.113	.035	.200	.110	.034	.189	.105	.033	.179	.100	.031	.169	.096	.030	
3.0	.195	.104	.031	.190	.102	.031	.181	.098	.030	.172	.094	.029	.164	.091	.028	
4.0	.185	.096	.028	.181	.095	.028	.172	.091	.027	.165	.088	.027	.158	.086	.026	
5.0	.175	.089	.026	.171	.088	.026	.164	.085	.025	.157	.083	.025	.151	.081	.024	
6.0	.166	.083	.024	.162	.082	.024	.156	.080	.023	.150	.078	.023	.144	.076	.023	
7.0	.157	.078	.022	.154	.077	.022	.148	.075	.022	.143	.073	.021	.138	.072	.021	
8.0	.149	.073	.020	.146	.072	.020	.141	.071	.020	.137	.069	.020	.132	.068	.020	
9.0	.142	.069	.019	.139	.068	.019	.135	.067	.019	.131	.065	.019	.126	.064	.019	
10.0	.135	.065	.018	.133	.064	.018	.129	.063	.018	.125	.062	.018	.121	.061	.017	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.142	.149	.135	.122	.102	.093	.085	.058	.054	.049	.019	.017	.016	
2.0	.161	.132	.108	.138	.114	.094	.094	.079	.065	.054	.046	.038	.017	.015	.012	
3.0	.150	.114	.085	.129	.098	.074	.088	.068	.052	.051	.040	.030	.016	.013	.010	
4.0	.141	.100	.068	.121	.086	.059	.083	.060	.042	.048	.035	.025	.015	.011	.008	
5.0	.133	.088	.055	.114	.076	.048	.079	.053	.034	.046	.031	.020	.015	.010	.007	
6.0	.126	.079	.046	.108	.069	.040	.075	.048	.028	.043	.028	.017	.014	.009	.006	
7.0	.120	.072	.039	.103	.063	.034	.071	.044	.024	.041	.026	.014	.013	.008	.005	
8.0	.114	.066	.033	.098	.057	.029	.068	.040	.021	.039	.024	.012	.013	.008	.004	
9.0	.109	.061	.029	.094	.053	.025	.065	.037	.018	.038	.022	.011	.012	.007	.004	
10.0	.104	.057	.026	.089	.049	.022	.062	.035	.016	.036	.021	.009	.012	.007	.003	

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:219.4V I:0.5611A P:120.6W PF:0.9797 Freq:50.01Hz 实检光通:19995.9x1 lm										
灯具名称: AOK HBE					灯具类型:			灯具重量:		
灯具规格: AOK-120WHBE-NV-L2-00-3080-60D-P					外型尺寸:			测试编号:		
制造厂商: AOK					发光口面: Φ263mm			遮光角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	24.5	25.7	24.8	25.9	26.0	24.7	25.8	24.9	26.0	26.2
3H	24.8	25.9	25.1	26.1	26.3	25.0	26.1	25.3	26.3	26.5
4H	24.9	25.9	25.2	26.1	26.3	25.1	26.1	25.4	26.3	26.5
6H	24.9	25.8	25.2	26.0	26.3	25.1	26.0	25.4	26.3	26.5
8H	24.8	25.7	25.2	26.0	26.3	25.1	26.0	25.4	26.2	26.5
12H	24.8	25.7	25.1	25.9	26.2	25.0	25.9	25.4	26.2	26.5
4H 2H	24.7	25.7	25.0	25.9	26.1	24.8	25.8	25.1	26.0	26.2
3H	25.1	25.9	25.4	26.2	26.5	25.2	26.1	25.6	26.4	26.6
4H	25.2	25.9	25.5	26.2	26.6	25.3	26.1	25.7	26.4	26.7
6H	25.2	25.9	25.6	26.2	26.6	25.4	26.1	25.8	26.4	26.8
8H	25.2	25.8	25.6	26.2	26.5	25.4	26.0	25.8	26.4	26.8
12H	25.1	25.7	25.5	26.1	26.5	25.4	26.0	25.8	26.3	26.7
8H 4H	25.1	25.8	25.5	26.1	26.5	25.3	25.9	25.7	26.3	26.7
6H	25.2	25.7	25.6	26.1	26.5	25.4	25.9	25.8	26.3	26.7
8H	25.2	25.6	25.6	26.1	26.5	25.4	25.9	25.9	26.3	26.7
12H	25.2	25.5	25.6	26.0	26.5	25.4	25.8	25.9	26.2	26.7
12H 4H	25.1	25.7	25.5	26.0	26.4	25.3	25.9	25.7	26.2	26.6
6H	25.2	25.6	25.6	26.0	26.5	25.4	25.8	25.8	26.3	26.7
8H	25.2	25.6	25.6	26.0	26.5	25.4	25.8	25.9	26.2	26.7
不同间隔布灯时,观察者位置引起的UGR变化:										
S = 1.0H	+ 1.0 / - 1.5					+ 1.0 / - 1.4				
1.5H	+ 1.3 / - 1.0					+ 1.4 / - 0.9				
2.0H	+ 1.8 / - 1.5					+ 1.8 / - 1.7				

依据CIE Pub.117计算, 19996lm光源光通,表格已经进行修正(8log(F/F0) = 10.4)。

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:219.4V I:0.5611A P:120.6W PF:0.9797 Freq:50.01Hz 实检光通:19995.9x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-3080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	77	68	63	76	68	63	75	68	63	58
0.80	85	77	72	85	77	72	83	76	72	67
1.00	92	84	79	91	84	79	89	84	79	74
1.25	97	90	85	96	89	85	94	88	84	79
1.50	100	94	90	99	93	89	97	92	88	83
2.00	105	99	95	103	98	94	100	96	93	87
2.50	107	102	98	105	101	97	102	98	95	89
3.00	109	105	101	107	103	100	104	100	98	91
4.00	112	108	105	109	106	104	106	103	101	93
5.00	113	110	108	111	108	106	107	105	103	95
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 $SHR_{NOM} = 1.25$			

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:219.4V I:0.5611A P:120.6W PF:0.9797 Freq:50.01Hz 实检光通:19995.9x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-3080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

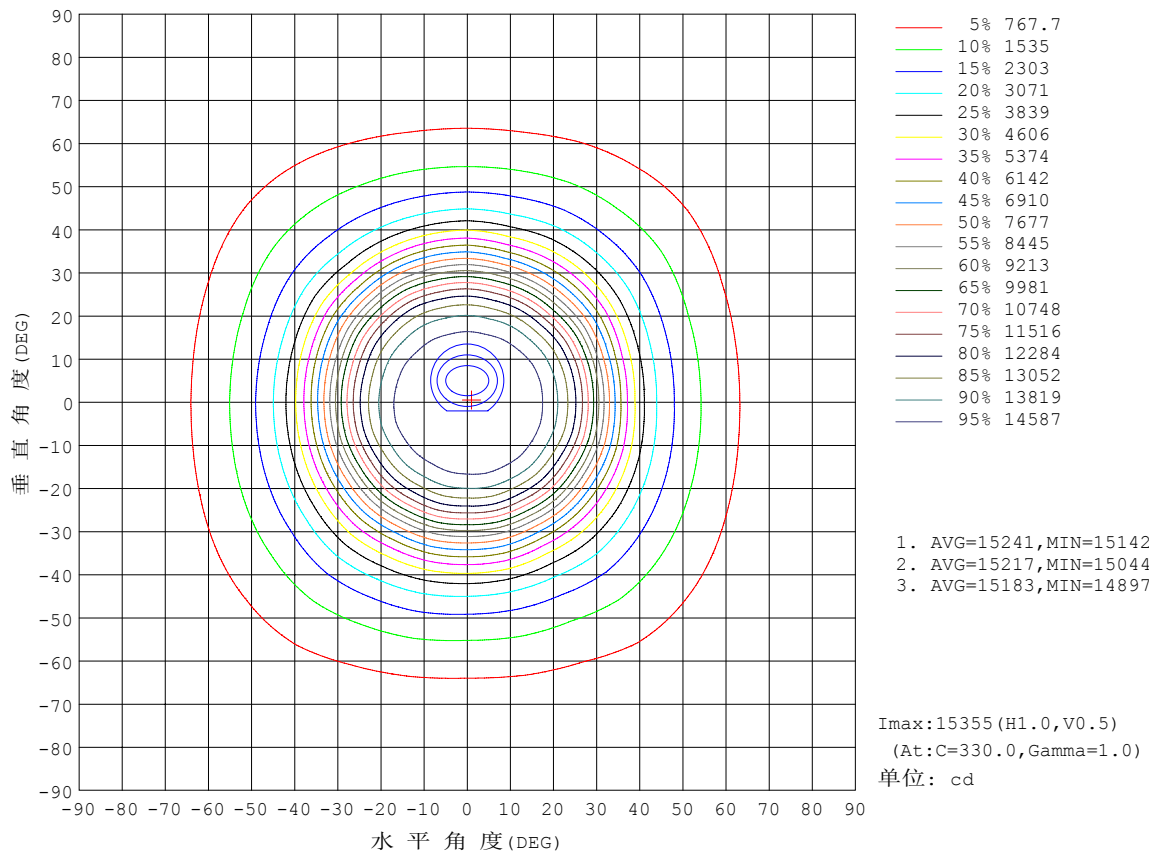


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:219.4V I:0.5611A P:120.6W PF:0.9797 Freq:50.01Hz 实检光通:19995.9x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-3080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

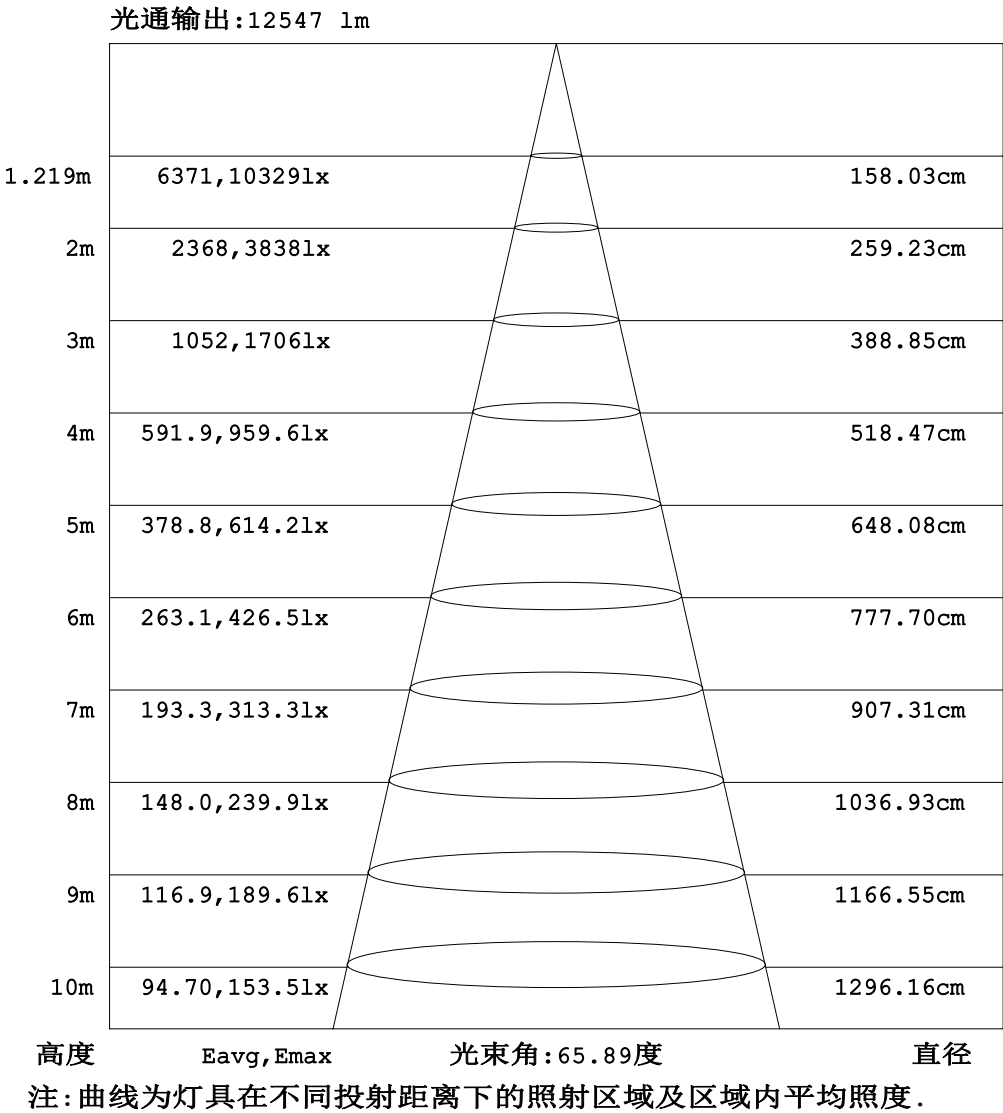


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度:25.3℃
测试人员:yanyonggeng
测试日期:2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度:65.0%
测试距离:7.682米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:219.4V I:0.5611A P:120.6W PF:0.9797 Freq:50.01Hz 实检光通:19995.9x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-3080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

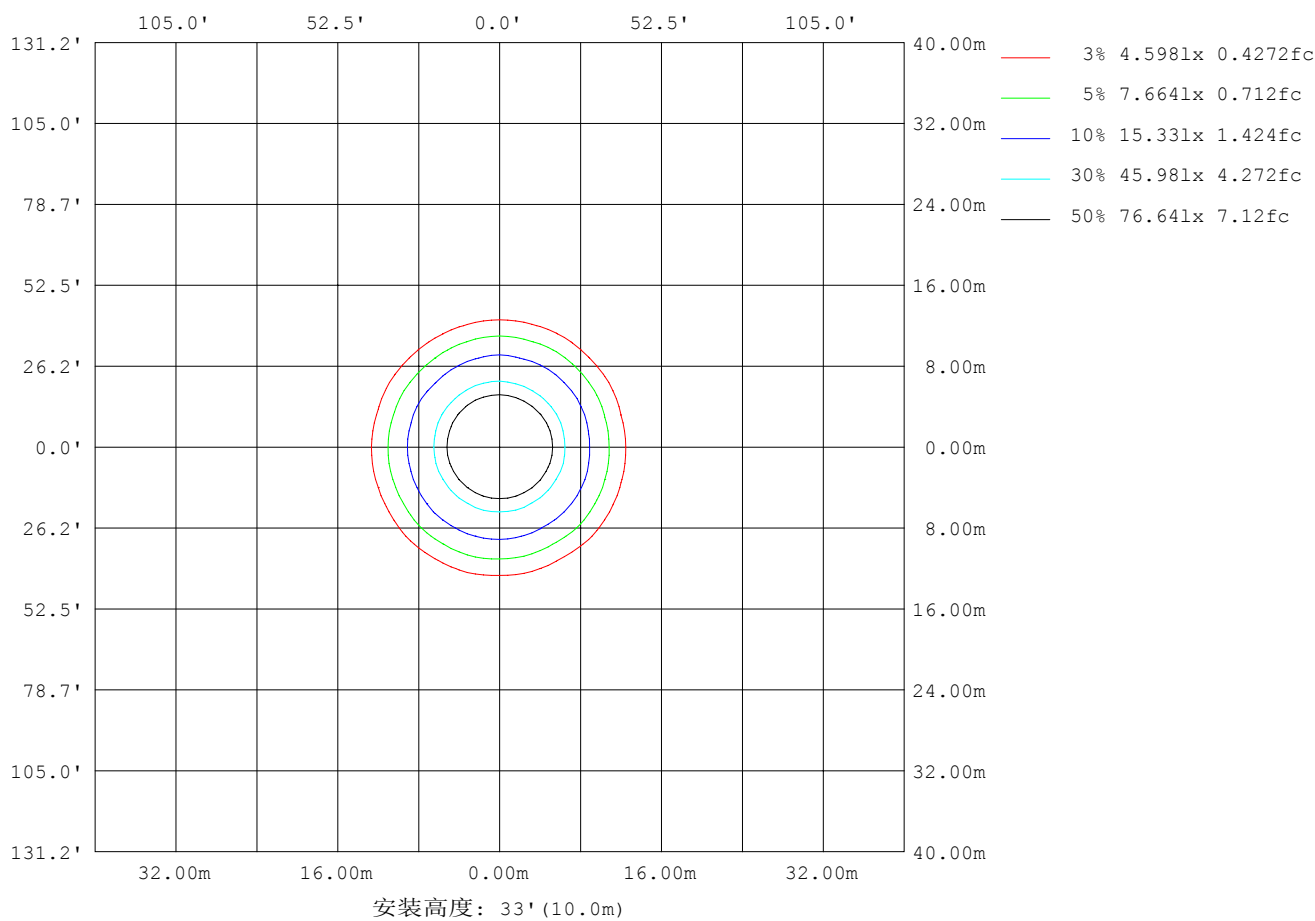

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:219.4V I:0.5611A P:120.6W PF:0.9797 Freq:50.01Hz 实检光通:19995.9x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-3080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:


平均亮度	数值 (cd/m ²)
L横 (65) av	29757
L横 (75) av	16938
L横 (85) av	5176
L纵 (65) av	29997
L纵 (75) av	17000
L纵 (85) av	5301
L45 (65) av	30781
L45 (75) av	17571
L45 (85) av	6939

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

平面照度曲线

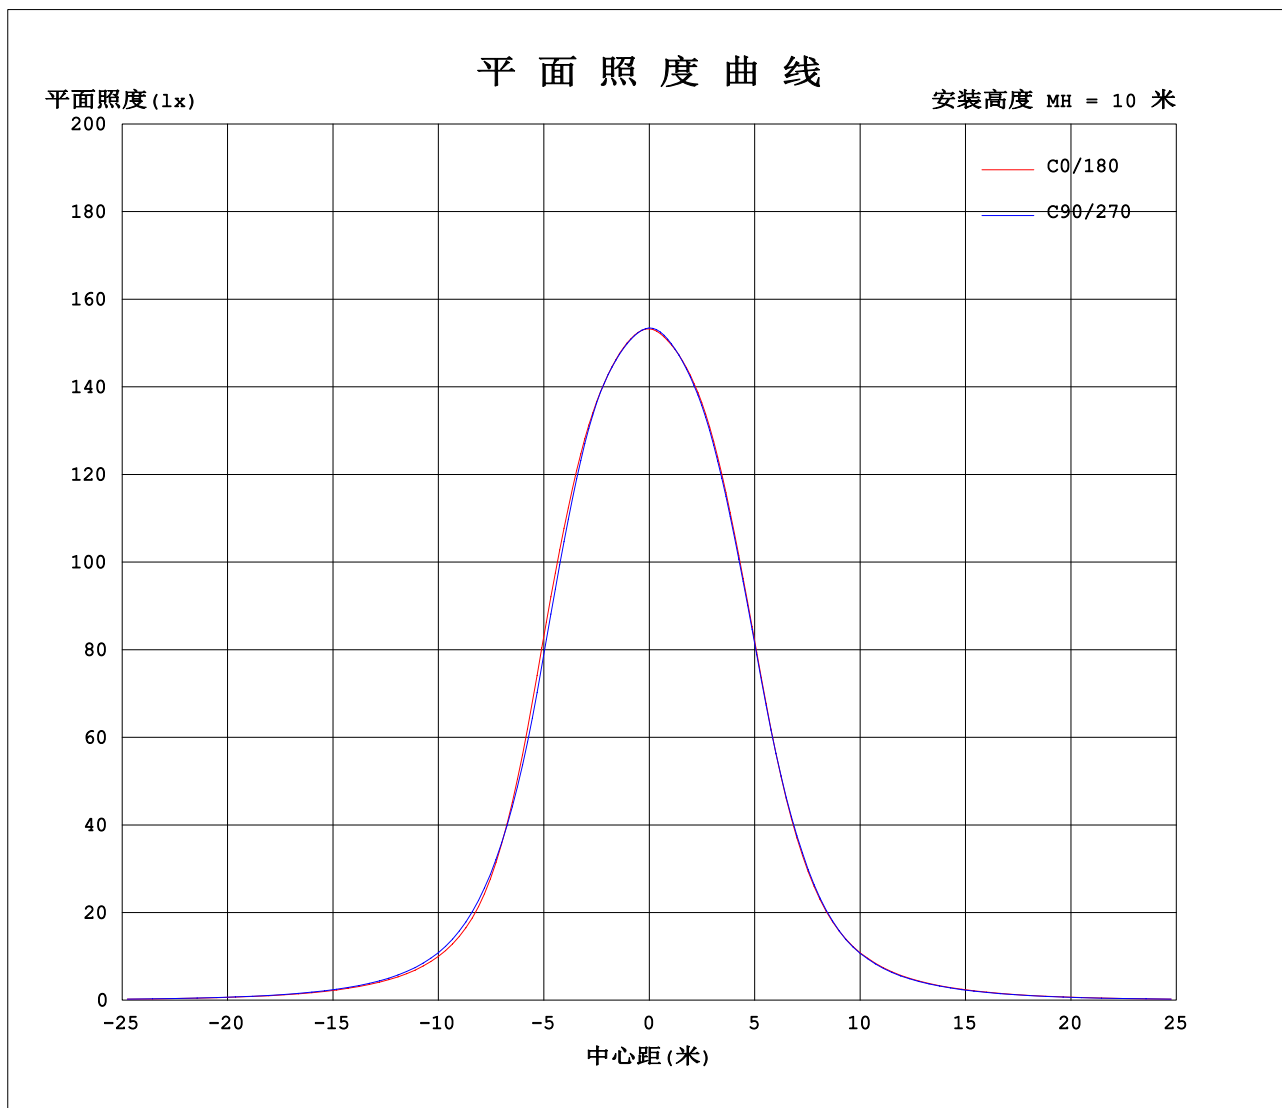

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:219.4V I:0.5611A P:120.6W PF:0.9797 Freq:50.01Hz 实检光通:19995.9x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-3080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: Φ 263mm	遮光角:

表--1		单位: $\times 10\text{cd}$																	
γ (DEG) \ C (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1534	1534	1534	1534	1534	1534	1534	1534	1534	1534	1534	1534	1534	1534	1534	1534	1534	1534	1534
5	1529	1529	1528	1528	1527	1527	1525	1525	1524	1525	1524	1525	1524	1524	1525	1524	1525	1525	1526
10	1516	1517	1516	1517	1516	1515	1513	1512	1511	1511	1512	1514	1513	1512	1511	1508	1508	1507	1508
15	1489	1492	1491	1492	1488	1487	1482	1481	1478	1481	1482	1487	1486	1483	1482	1477	1477	1475	1476
20	1409	1412	1404	1403	1392	1390	1380	1382	1377	1385	1386	1397	1398	1395	1397	1392	1393	1385	1385
25	1239	1241	1220	1216	1196	1197	1184	1194	1189	1200	1202	1218	1222	1218	1230	1226	1230	1213	1211
30	955	957	930	928	908	916	907	918	911	926	925	947	954	954	971	962	967	950	949
35	650	665	648	644	638	655	653	659	649	662	661	669	675	681	688	671	680	682	684
40	419	434	437	436	429	446	450	454	448	457	449	448	452	454	459	436	442	450	457
45	284	294	299	305	296	304	308	314	311	316	306	305	306	302	303	293	295	298	303
50	202	206	212	217	210	216	218	223	221	223	215	216	216	211	213	208	208	208	210
55	146	148	152	156	151	156	156	161	159	161	155	155	155	152	154	151	149	150	150
60	100	102	104	109	104	108	108	111	111	112	107	108	108	105	107	105	104	103	104
65	65.8	66.8	68.6	72.3	68.9	71.1	70.3	72.5	72.3	74.8	71.1	71.0	70.8	68.9	70.4	69.6	68.4	66.6	67.5
70	40.1	40.9	41.8	44.8	42.6	43.8	43.6	44.5	44.6	47.0	44.4	44.1	43.9	42.7	43.5	43.0	42.0	40.3	41.3
75	22.4	22.8	22.5	25.2	23.0	25.0	25.1	25.4	24.6	27.6	25.0	25.5	25.2	24.2	23.9	23.6	22.6	22.0	22.7
80	11.3	10.6	9.99	12.5	10.4	13.5	14.4	14.2	13.3	15.7	13.1	13.7	13.8	12.7	10.9	12.8	11.0	11.4	11.5
85	1.71	2.02	2.60	3.26	3.13	3.19	3.15	3.57	4.10	4.67	3.97	3.36	3.20	2.50	3.09	2.98	2.74	1.85	1.87
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:219.4V I:0.5611A P:120.6W PF:0.9797 Freq:50.01Hz 实检光通:19995.9x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-3080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

表--2						单位: $\times 10\text{cd}$													
γ (DEG) \ C (DEG)	285	300	315	330	345														
0	1534	1534	1534	1534	1534														
5	1526	1528	1528	1529	1529														
10	1509	1512	1514	1516	1516														
15	1475	1480	1483	1489	1490														
20	1380	1388	1392	1405	1408														
25	1199	1207	1207	1232	1235														
30	931	934	933	955	956														
35	658	661	663	673	653														
40	439	444	445	439	425														
45	296	302	297	297	286														
50	209	212	207	208	201														
55	149	151	147	149	143														
60	102	104	101	102	98.0														
65	66.3	67.7	65.9	66.5	64.0														
70	40.0	41.2	40.4	40.0	38.8														
75	22.1	22.2	22.4	21.4	21.5														
80	10.4	9.34	9.91	8.85	9.95														
85	1.86	2.30	2.23	2.20	1.76														
90	0.00	0.00	0.00	0.00	0.00														
95	0.00	0.00	0.00	0.00	0.00														
100	0.00	0.00	0.00	0.00	0.00														
105	0.00	0.00	0.00	0.00	0.00														
110	0.00	0.00	0.00	0.00	0.00														
115	0.00	0.00	0.00	0.00	0.00														
120	0.00	0.00	0.00	0.00	0.00														
125	0.00	0.00	0.00	0.00	0.00														
130	0.00	0.00	0.00	0.00	0.00														
135	0.00	0.00	0.00	0.00	0.00														
140	0.00	0.00	0.00	0.00	0.00														
145	0.00	0.00	0.00	0.00	0.00														
150	0.00	0.00	0.00	0.00	0.00														
155	0.00	0.00	0.00	0.00	0.00														
160	0.00	0.00	0.00	0.00	0.00														
165	0.00	0.00	0.00	0.00	0.00														
170	0.00	0.00	0.00	0.00	0.00														
175	0.00	0.00	0.00	0.00	0.00														
180	0.00	0.00	0.00	0.00	0.00														

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注: