


室内灯具光度数据

实测参数: U:219.3V I:0.3789A P:80.11W PF:0.9644 Freq:50.01Hz 实检光通:14468.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-80WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

光源数据		光度数据				光效: 180.61 lm/W
型号	2835	峰值光强(cd)	11190	S/MH(C0/180)	0.98	
标称功率(W)	80	灯具效率(%)	100.0	S/MH(C90/270)	0.99	
额定电源电压(V)	220	总光通量(lm)	14469	η UP,DN(C0-180)	0.0,49.5	
额定光通量(lm)	14468.6	CIE分类	直接	η UP,DN(C180-360)	0.0,50.5	
灯具内光源数(只)	1	上射光通比(%)	0.0	CIBSE SHR NOM	1.00	
实测电源电压(V)	220	下射光通比(%)	100.0	CIBSE SHR MAX	1.00	

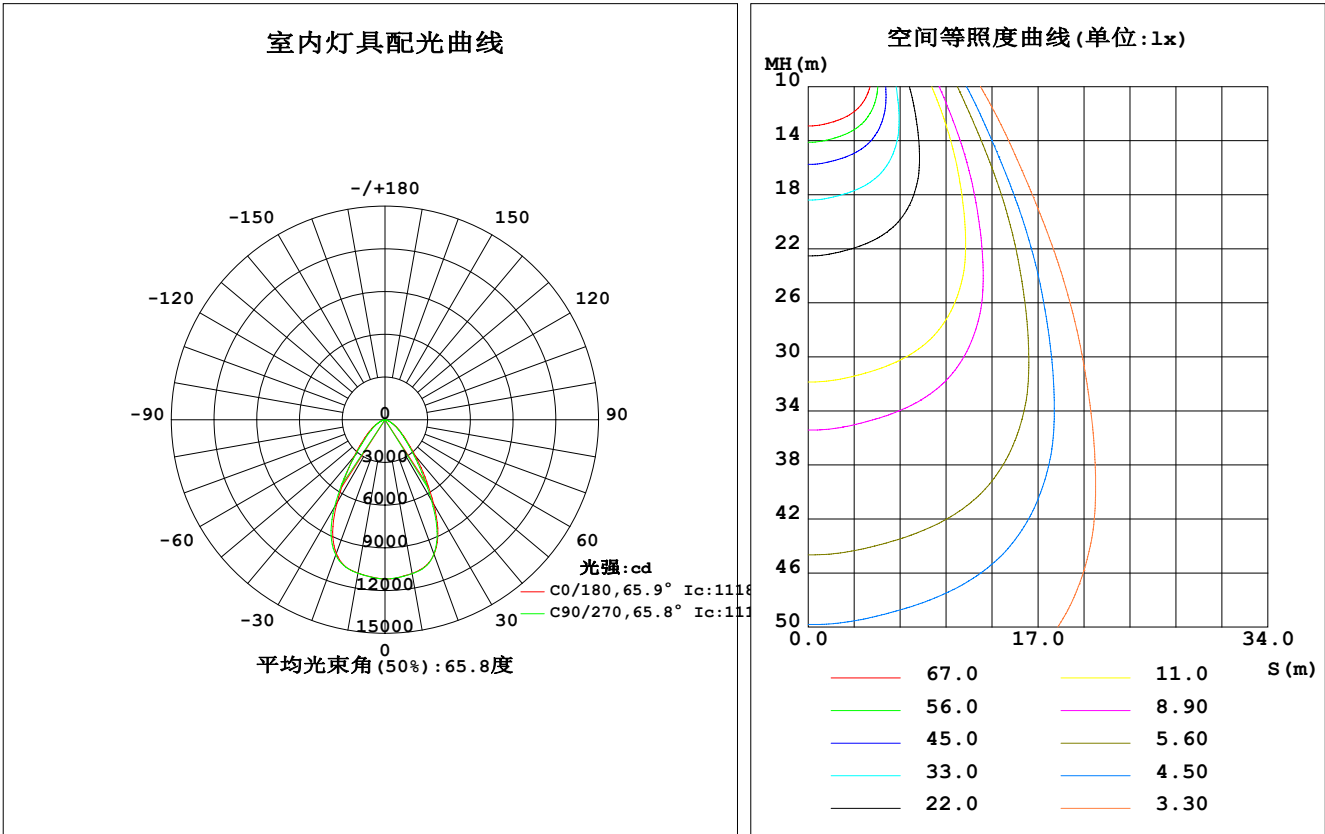

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	1096	1099	1098	1096	1094	1096	1094	1093	0- 10	1055	1055	7.29, 7.29
20	1006	1019	1005	998.1	999.4	1008	1011	1002	10- 20	3004	4059	28.1, 28.1
30	683.7	694.4	652.3	658.4	673.7	690.6	711.5	693.4	20- 30	3966	8025	55.5, 55.5
40	333.8	306.8	304.3	316.1	339.5	329.9	326.0	327.7	30- 40	3022	11047	76.4, 76.4
50	159.2	146.7	148.5	145.6	168.6	157.5	150.5	144.4	40- 50	1724	12771	88.3, 88.3
60	76.93	72.01	73.32	72.41	82.89	78.18	75.29	70.55	50- 60	993.0	13764	95.1, 95.1
70	29.37	28.45	28.96	29.74	33.16	31.81	30.64	28.05	60- 70	497.7	14262	98.6, 98.6
80	7.108	6.653	7.490	8.686	9.795	8.401	8.595	7.086	70- 80	180.5	14442	99.8, 99.8
90	0	0	0	0	0	0	0	0	80- 90	26.52	14469	100, 100
100	0	0	0	0	0	0	0	0	90-100	0	14469	100, 100
110	0	0	0	0	0	0	0	0	100-110	0	14469	100, 100
120	0	0	0	0	0	0	0	0	110-120	0	14469	100, 100
130	0	0	0	0	0	0	0	0	120-130	0	14469	100, 100
140	0	0	0	0	0	0	0	0	130-140	0	14469	100, 100
150	0	0	0	0	0	0	0	0	140-150	0	14469	100, 100
160	0	0	0	0	0	0	0	0	150-160	0	14469	100, 100
170	0	0	0	0	0	0	0	0	160-170	0	14469	100, 100
180	0	0	0	0	0	0	0	0	170-180	0	14469	100, 100
单位:°	光强:×10cd									单位:lm		

锥面光通量(90度)：12030 lm

%lum = 83.1%
%lamp = 83.1%

锥面光通量(120度)：13764 lm


%lum = 95.1%
%lamp = 95.1%

C角度范围： 0度 - 360度
C角度间隔：15.0度
测试速度：快速
环境温度:25.3℃
测试人员:yanyonggeng
测试日期:2024-10-26

γ角度范围： 0度 - 180度
γ角度间隔： 1.0度
测试系统：远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度:65.0%
测试距离:7.682米 [K=1.0000]
备注：

灯具亮度限制曲线

实测参数: U:219.3V I:0.3789A P:80.11W PF:0.9644 Freq:50.01Hz 实检光通:14468.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-80WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

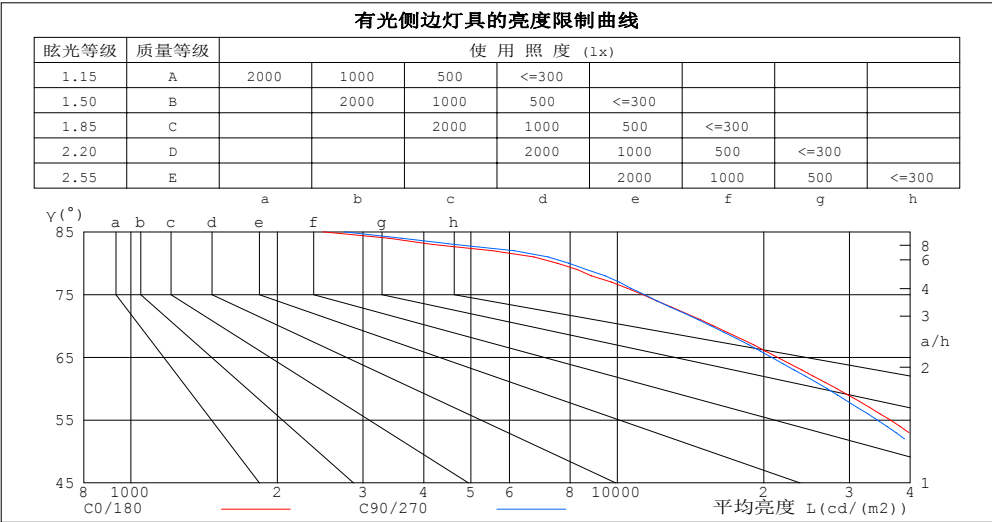

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	2483	2742
80	7521	7943
75	11274	11364
70	15777	15595
65	21339	20749
60	28269	27005
55	36432	34210
50	45506	42542
45	58438	54453


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:219.3V I:0.3789A P:80.11W PF:0.9644 Freq:50.01Hz 实检光通:14468.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-80WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.09	1.06	1.03	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	.99	.95	.91	.98	.93	.90	.94	.91	.88	.91	.88	.86	.88	.86	.84	.82
3.0	.91	.85	.80	.90	.84	.80	.87	.82	.78	.84	.80	.77	.82	.79	.76	.74
4.0	.84	.77	.72	.82	.76	.72	.80	.75	.71	.78	.74	.70	.76	.72	.69	.67
5.0	.77	.70	.65	.76	.70	.65	.74	.69	.64	.72	.68	.64	.71	.67	.63	.61
6.0	.71	.64	.59	.71	.64	.59	.69	.63	.59	.67	.62	.58	.66	.61	.58	.56
7.0	.66	.59	.54	.66	.59	.54	.64	.58	.54	.63	.58	.54	.62	.57	.53	.52
8.0	.62	.55	.50	.61	.55	.50	.60	.54	.50	.59	.54	.50	.58	.53	.49	.48
9.0	.58	.51	.47	.57	.51	.46	.56	.50	.46	.55	.50	.46	.54	.49	.46	.44
10.0	.54	.48	.43	.54	.47	.43	.53	.47	.43	.52	.47	.43	.51	.46	.43	.41

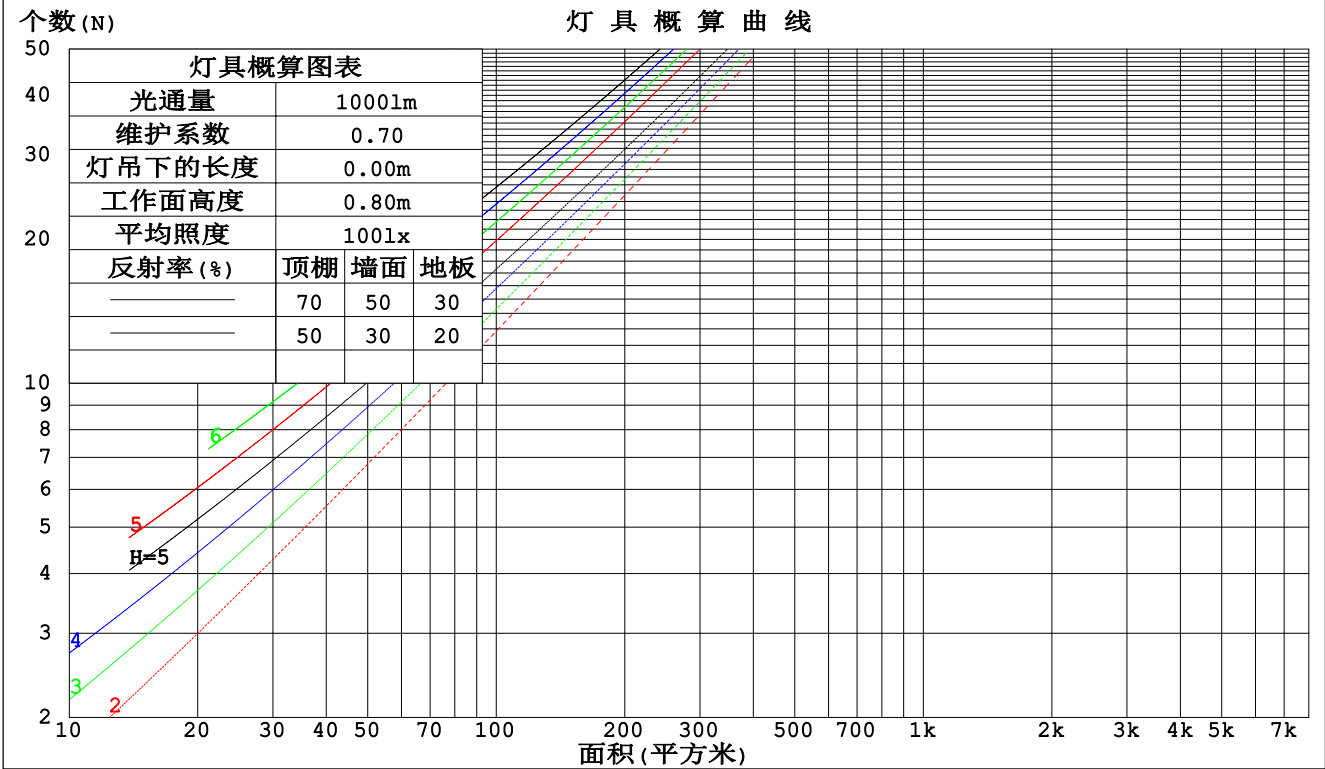

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:219.3V I:0.3789A P:80.11W PF:0.9644 Freq:50.01Hz 实检光通:14468.6x1 lm					
灯具名称: AOK HBE			灯具类型:		灯具重量:
灯具规格: AOK-80WHBE-NV-L2-00-4080-60D-P			外型尺寸:		测试编号:
制造厂商: AOK			发光口面: Φ263mm		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.212	.121	.038	.205	.117	.037	.193	.111	.035	.181	.104	.033	.170	.099	.032	
2.0	.205	.112	.034	.199	.110	.034	.188	.105	.033	.178	.100	.031	.169	.096	.030	
3.0	.195	.104	.031	.190	.102	.031	.181	.098	.030	.172	.094	.029	.164	.091	.028	
4.0	.185	.096	.028	.180	.094	.028	.172	.091	.027	.164	.088	.027	.157	.085	.026	
5.0	.175	.089	.026	.171	.088	.026	.164	.085	.025	.157	.083	.025	.151	.080	.024	
6.0	.166	.083	.024	.162	.082	.024	.156	.080	.023	.150	.078	.023	.144	.076	.023	
7.0	.157	.078	.022	.154	.077	.022	.148	.075	.022	.143	.073	.021	.138	.072	.021	
8.0	.149	.073	.020	.146	.072	.020	.141	.071	.020	.136	.069	.020	.132	.068	.020	
9.0	.142	.069	.019	.139	.068	.019	.135	.067	.019	.130	.065	.019	.126	.064	.019	
10.0	.135	.065	.018	.133	.064	.018	.129	.063	.018	.125	.062	.018	.121	.061	.017	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.142	.148	.135	.122	.102	.093	.085	.058	.054	.049	.019	.017	.016	
2.0	.161	.132	.108	.138	.114	.094	.094	.079	.065	.054	.046	.038	.017	.015	.012	
3.0	.150	.114	.085	.129	.098	.074	.088	.068	.052	.051	.040	.030	.016	.013	.010	
4.0	.141	.100	.068	.121	.086	.059	.083	.060	.042	.048	.035	.025	.015	.011	.008	
5.0	.133	.088	.055	.114	.076	.048	.079	.053	.034	.046	.031	.020	.015	.010	.007	
6.0	.126	.079	.046	.108	.069	.040	.075	.048	.028	.043	.028	.017	.014	.009	.006	
7.0	.120	.072	.039	.103	.063	.034	.071	.044	.024	.041	.026	.014	.013	.008	.005	
8.0	.114	.066	.033	.098	.057	.029	.068	.040	.021	.039	.024	.012	.013	.008	.004	
9.0	.109	.061	.029	.094	.053	.025	.065	.037	.018	.038	.022	.011	.012	.007	.004	
10.0	.104	.057	.026	.089	.049	.022	.062	.035	.016	.036	.021	.009	.012	.007	.003	

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:219.3V I:0.3789A P:80.11W PF:0.9644 Freq:50.01Hz 实检光通:14468.6x1 lm										
灯具名称: AOK HBE					灯具类型:			灯具重量:		
灯具规格: AOK-80WHBE-NV-L2-00-4080-60D-P					外型尺寸:			测试编号:		
制造厂商: AOK					发光口面: Φ263mm			遮光角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	23.4	24.5	23.6	24.7	24.9	23.2	24.3	23.4	24.5	24.7
3H	23.6	24.7	23.9	24.9	25.1	23.5	24.5	23.7	24.7	24.9
4H	23.7	24.7	24.0	24.9	25.1	23.5	24.5	23.8	24.7	25.0
6H	23.7	24.6	24.0	24.8	25.1	23.5	24.4	23.8	24.7	24.9
8H	23.6	24.5	23.9	24.8	25.1	23.5	24.4	23.8	24.6	24.9
12H	23.6	24.4	23.9	24.7	25.0	23.4	24.3	23.8	24.6	24.8
4H 2H	23.5	24.4	23.7	24.7	24.9	23.3	24.3	23.6	24.5	24.7
3H	23.8	24.7	24.1	24.9	25.2	23.7	24.5	24.0	24.8	25.1
4H	23.9	24.7	24.2	25.0	25.3	23.7	24.5	24.1	24.8	25.1
6H	23.9	24.6	24.3	24.9	25.3	23.8	24.4	24.2	24.8	25.1
8H	23.9	24.5	24.3	24.9	25.2	23.7	24.4	24.1	24.7	25.1
12H	23.8	24.4	24.2	24.8	25.2	23.7	24.3	24.1	24.7	25.1
8H 4H	23.8	24.5	24.2	24.8	25.2	23.7	24.3	24.1	24.7	25.1
6H	23.9	24.4	24.3	24.8	25.2	23.7	24.3	24.2	24.7	25.1
8H	23.8	24.3	24.3	24.7	25.2	23.7	24.2	24.2	24.6	25.0
12H	23.8	24.2	24.3	24.6	25.1	23.7	24.1	24.2	24.5	25.0
12H 4H	23.8	24.4	24.2	24.7	25.1	23.7	24.2	24.1	24.6	25.0
6H	23.8	24.3	24.3	24.7	25.1	23.7	24.2	24.2	24.6	25.0
8H	23.8	24.2	24.3	24.6	25.1	23.7	24.1	24.2	24.5	25.0
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 1.2 / - 1.5					+ 1.1 / - 1.4				
1.5H	+ 1.8 / - 1.0					+ 1.5 / - 0.9				
2.0H	+ 2.2 / - 1.9					+ 1.9 / - 1.7				

依据CIE Pub.117计算, 14469lm光源光通, 表格已经进行修正(8log(F/F0) = 9.3)。

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:219.3V I:0.3789A P:80.11W PF:0.9644 Freq:50.01Hz 实检光通:14468.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-80WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	77	68	63	76	68	63	75	68	63	59
0.80	85	78	73	85	77	72	83	77	72	67
1.00	92	84	79	91	84	79	89	84	79	74
1.25	97	90	86	96	89	85	94	88	84	79
1.50	100	94	90	99	93	89	97	92	88	83
2.00	105	99	95	103	98	94	100	96	93	87
2.50	107	102	98	105	101	97	102	98	95	89
3.00	109	105	101	107	103	100	104	101	98	91
4.00	112	108	105	109	106	104	106	103	101	93
5.00	113	110	108	111	108	106	107	105	103	95
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 $SHR_{NOM} = 1.25$			

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:219.3V I:0.3789A P:80.11W PF:0.9644 Freq:50.01Hz 实检光通:14468.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-80WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

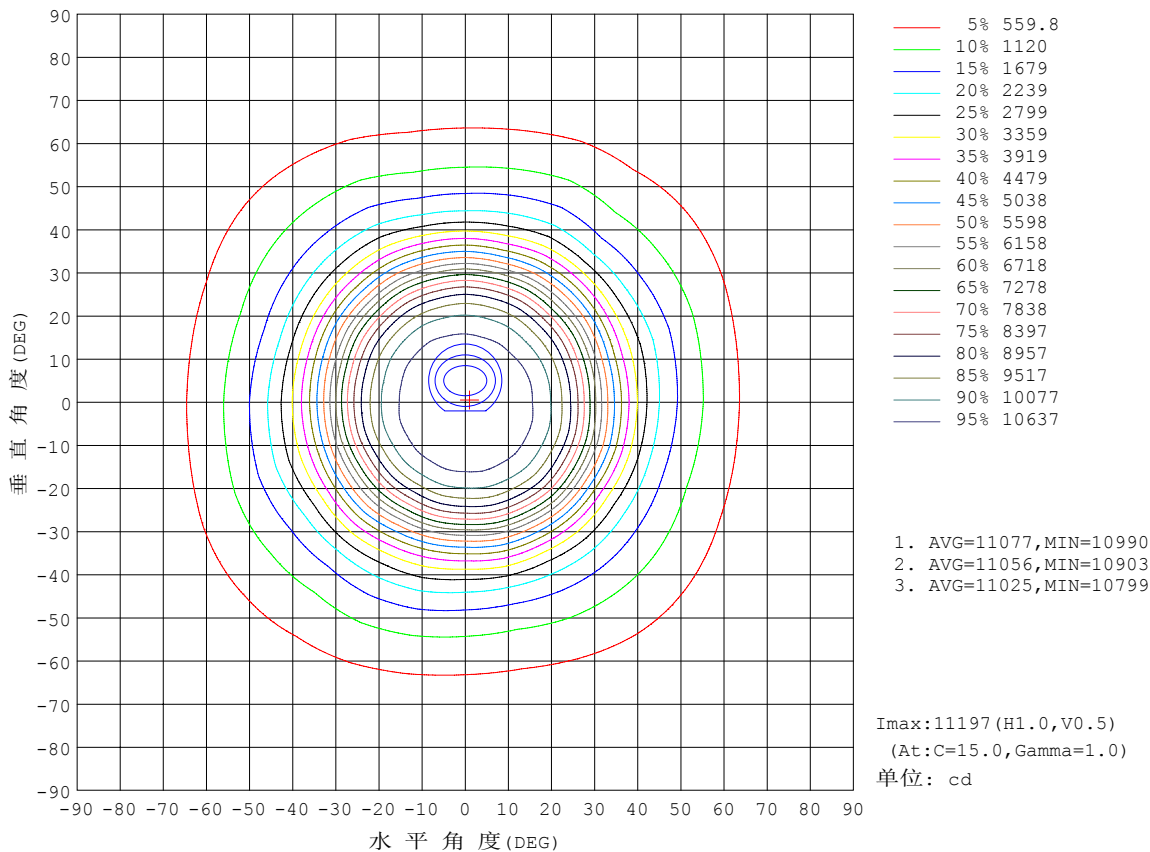


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:219.3V I:0.3789A P:80.11W PF:0.9644 Freq:50.01Hz 实检光通:14468.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-80WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

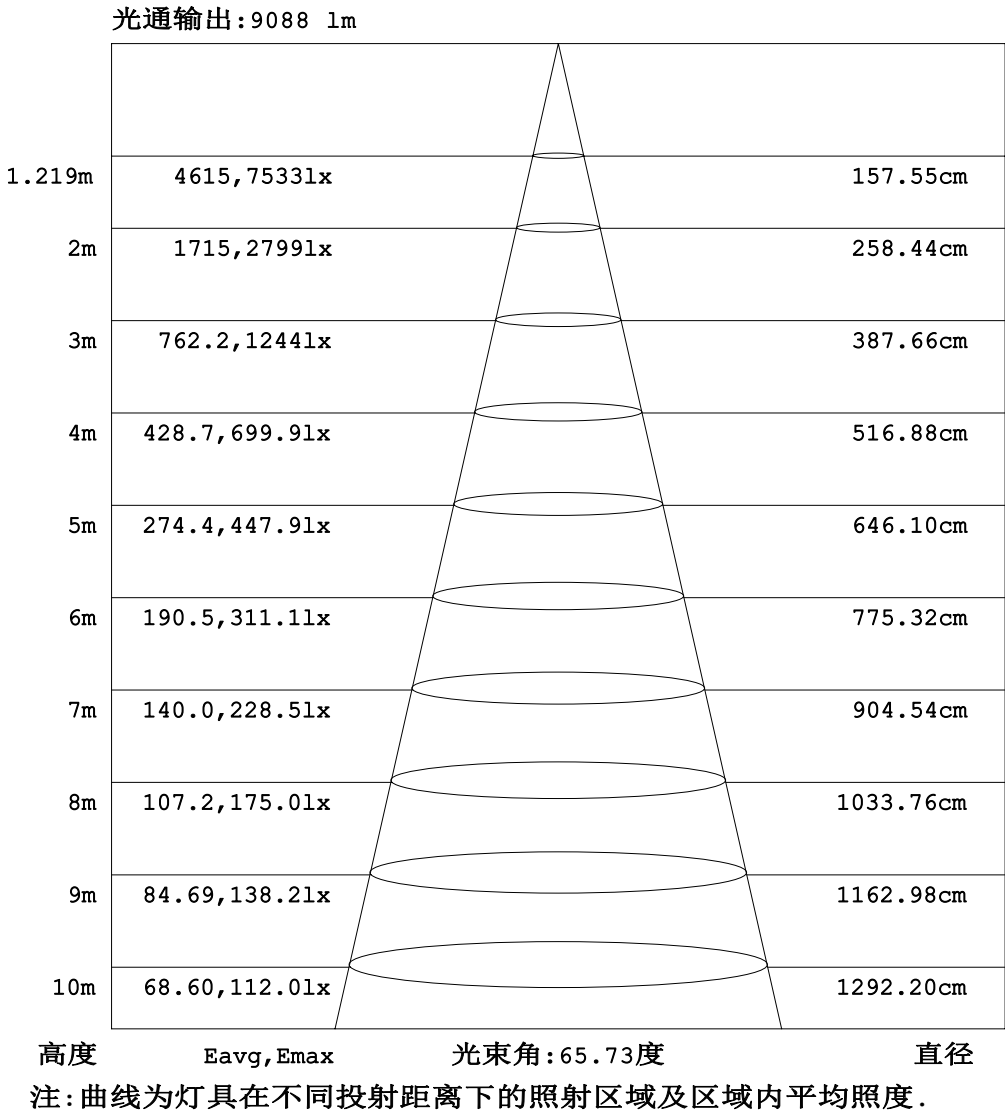


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:219.3V I:0.3789A P:80.11W PF:0.9644 Freq:50.01Hz 实检光通:14468.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-80WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

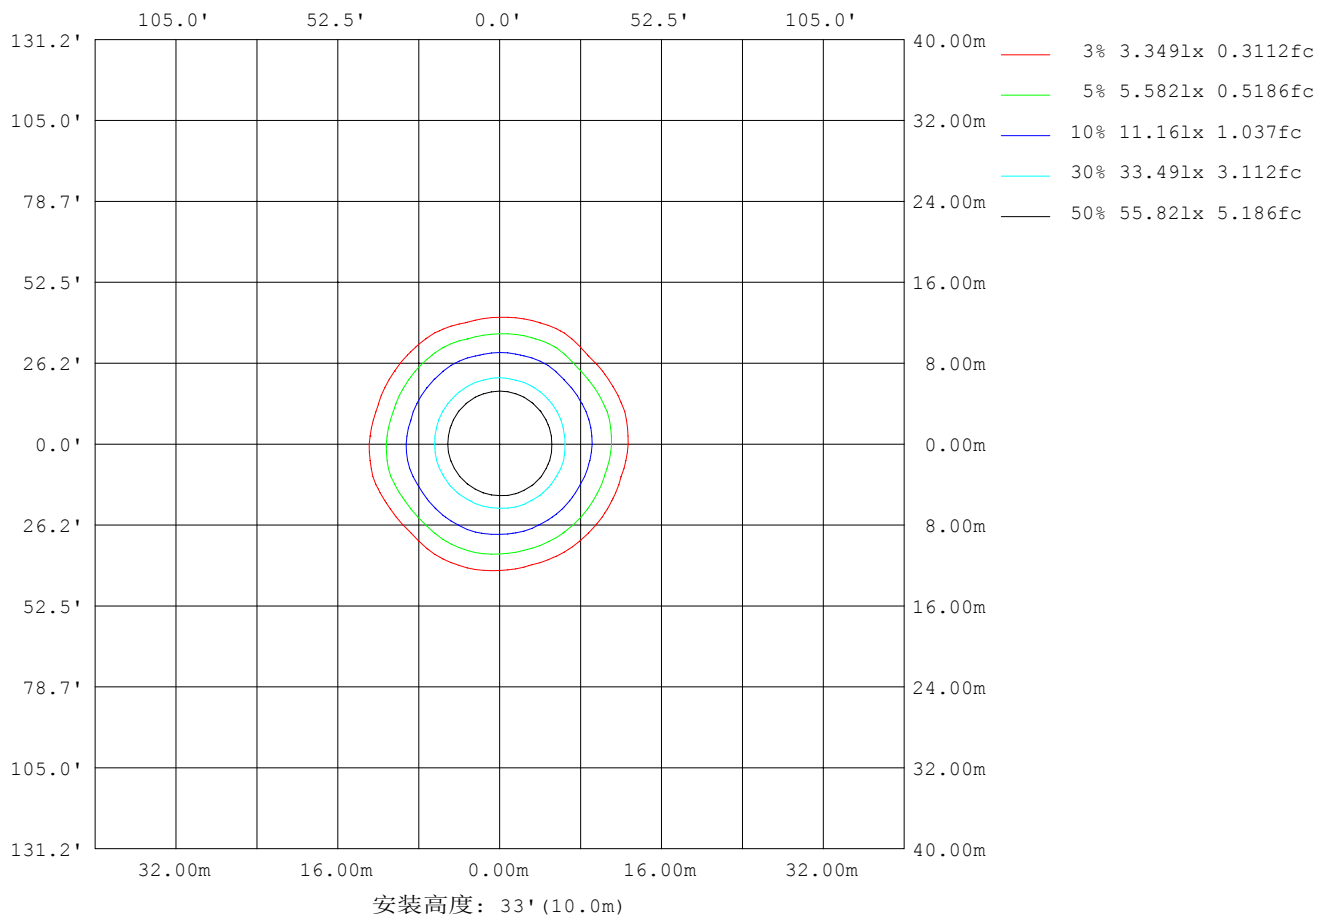

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:219.3V I:0.3789A P:80.11W PF:0.9644 Freq:50.01Hz 实检光通:14468.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-80WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:


平均亮度	数值 (cd/m ²)
L横 (65) av	22467
L横 (75) av	12239
L横 (85) av	3501
L纵 (65) av	21168
L纵 (75) av	11681
L纵 (85) av	3238
L45 (65) av	20912
L45 (75) av	11214
L45 (85) av	4401

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

平面照度曲线

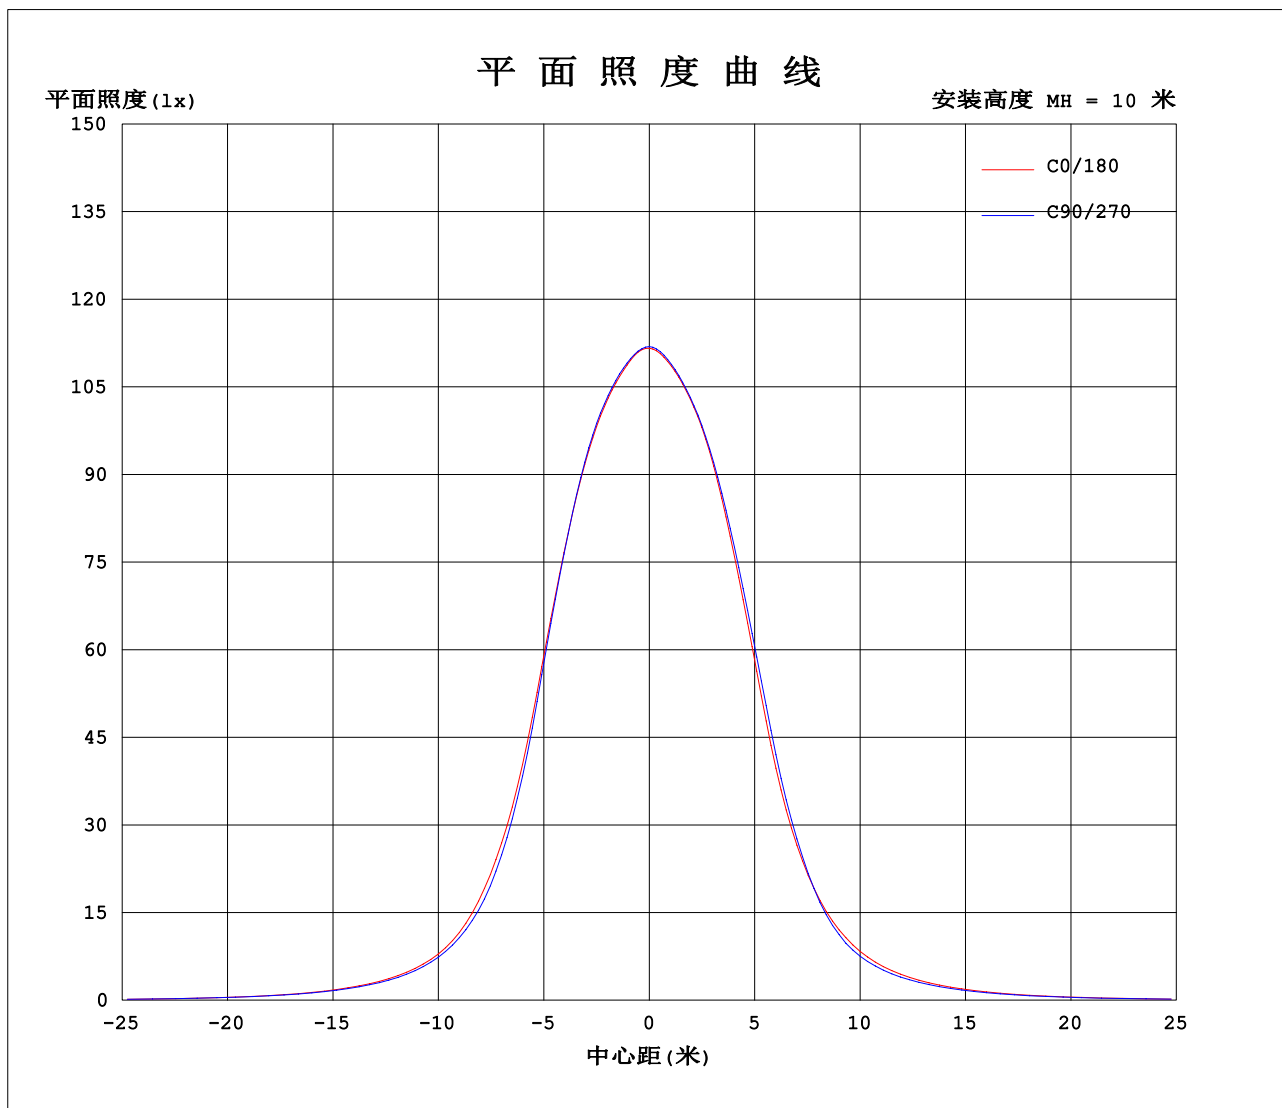

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:219.3V I:0.3789A P:80.11W PF:0.9644 Freq:50.01Hz 实检光通:14468.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-80WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

表--1		单位: ×10cd																		
C (DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	
0	1119	1119	1119	1119	1119	1119	1119	1119	1119	1119	1119	1119	1119	1119	1119	1119	1119	1119	1119	
5	1111	1112	1112	1113	1112	1112	1111	1111	1109	1109	1109	1108	1108	1108	1109	1109	1109	1109	1109	
10	1096	1098	1098	1099	1099	1099	1098	1098	1097	1096	1095	1094	1094	1094	1096	1096	1097	1095	1094	
15	1070	1075	1075	1077	1076	1076	1074	1074	1071	1071	1068	1069	1068	1069	1072	1072	1074	1071	1070	
20	1006	1014	1014	1019	1013	1013	1005	1004	997	998	994	999	999	1000	1007	1008	1013	1010	1011	
25	880	892	891	898	887	883	867	866	855	861	858	867	870	870	882	883	891	890	896	
30	684	697	690	694	676	672	652	655	646	658	656	669	674	674	690	691	703	702	712	
35	491	496	474	471	465	467	452	455	455	470	468	476	484	485	492	488	499	500	502	
40	334	325	304	307	301	310	304	314	310	316	315	335	339	331	330	330	335	327	326	
45	225	213	207	208	206	205	209	219	217	209	214	238	237	223	223	225	227	213	213	
50	159	148	146	147	147	143	148	156	156	146	152	169	169	156	157	158	161	149	150	
55	114	104	105	105	105	102	107	112	112	104	110	121	120	111	112	113	115	106	108	
60	76.9	70.9	71.5	72.0	71.5	69.8	73.3	77.1	77.4	72.4	75.7	83.5	82.9	76.7	78.1	78.2	80.1	73.8	75.3	
65	49.1	45.9	45.8	47.0	46.2	45.6	47.6	50.3	50.2	47.7	49.2	54.2	54.1	50.3	51.2	51.4	52.3	48.6	49.6	
70	29.4	28.0	27.4	28.5	27.6	27.9	29.0	30.6	30.4	29.7	30.0	32.9	33.2	31.0	31.6	31.8	32.2	30.1	30.6	
75	15.9	15.2	14.5	14.5	14.6	15.3	16.0	16.8	16.4	16.4	16.4	18.1	18.5	17.6	17.5	17.1	17.6	16.8	16.9	
80	7.11	6.68	5.90	6.65	5.83	7.06	7.49	7.64	7.24	8.69	7.72	9.22	9.80	8.94	7.97	8.40	7.89	7.96	8.59	
85	1.18	1.18	1.33	1.50	1.36	1.32	1.30	1.54	2.00	2.60	2.48	2.30	2.14	2.06	2.40	2.57	2.43	1.83	1.77	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:219.3V I:0.3789A P:80.11W PF:0.9644 Freq:50.01Hz 实检光通:14468.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-80WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: φ263mm	遮光角:

表--2						单位: x10cd													
C (DEG) γ (DEG)	285	300	315	330	345														
0	1119	1119	1119	1119	1119														
5	1109	1110	1109	1111	1111														
10	1093	1093	1093	1094	1095														
15	1068	1068	1066	1068	1069														
20	1007	1007	1002	1005	1005														
25	891	891	881	883	878														
30	703	707	693	695	685														
35	492	502	498	496	485														
40	325	336	328	325	332														
45	220	225	209	215	230														
50	155	160	144	151	162														
55	111	115	103	107	115														
60	77.0	78.7	70.5	74.0	78.2														
65	50.3	50.9	45.9	47.9	49.7														
70	30.6	30.6	28.0	28.8	29.6														
75	16.6	16.1	15.0	15.4	15.9														
80	8.14	7.00	7.09	6.26	6.74														
85	1.47	1.73	1.66	1.49	1.07														
90	0.00	0.00	0.00	0.00	0.00														
95	0.00	0.00	0.00	0.00	0.00														
100	0.00	0.00	0.00	0.00	0.00														
105	0.00	0.00	0.00	0.00	0.00														
110	0.00	0.00	0.00	0.00	0.00														
115	0.00	0.00	0.00	0.00	0.00														
120	0.00	0.00	0.00	0.00	0.00														
125	0.00	0.00	0.00	0.00	0.00														
130	0.00	0.00	0.00	0.00	0.00														
135	0.00	0.00	0.00	0.00	0.00														
140	0.00	0.00	0.00	0.00	0.00														
145	0.00	0.00	0.00	0.00	0.00														
150	0.00	0.00	0.00	0.00	0.00														
155	0.00	0.00	0.00	0.00	0.00														
160	0.00	0.00	0.00	0.00	0.00														
165	0.00	0.00	0.00	0.00	0.00														
170	0.00	0.00	0.00	0.00	0.00														
175	0.00	0.00	0.00	0.00	0.00														
180	0.00	0.00	0.00	0.00	0.00														

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注: