


室内灯具光度数据

实测参数: U:219.3V I:0.5624A P:120.8W PF:0.9800 Freq:50.01Hz 实检光通:21309.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

光源数据		光度数据				光效: 176.34 lm/W
型号	2835	峰值光强(cd)	16518	S/MH(C0/180)	0.97	
标称功率(W)	120	灯具效率(%)	100.0	S/MH(C90/270)	0.99	
额定电源电压(V)	220	总光通量(lm)	21310	η UP,DN(C0-180)	0.0,49.5	
额定光通量(lm)	21309.6	CIE分类	直接	η UP,DN(C180-360)	0.0,50.5	
灯具内光源数(只)	1	上射光通比(%)	0.0	CIBSE SHR NOM	1.00	
实测电源电压(V)	220	下射光通比(%)	100.0	CIBSE SHR MAX	1.00	

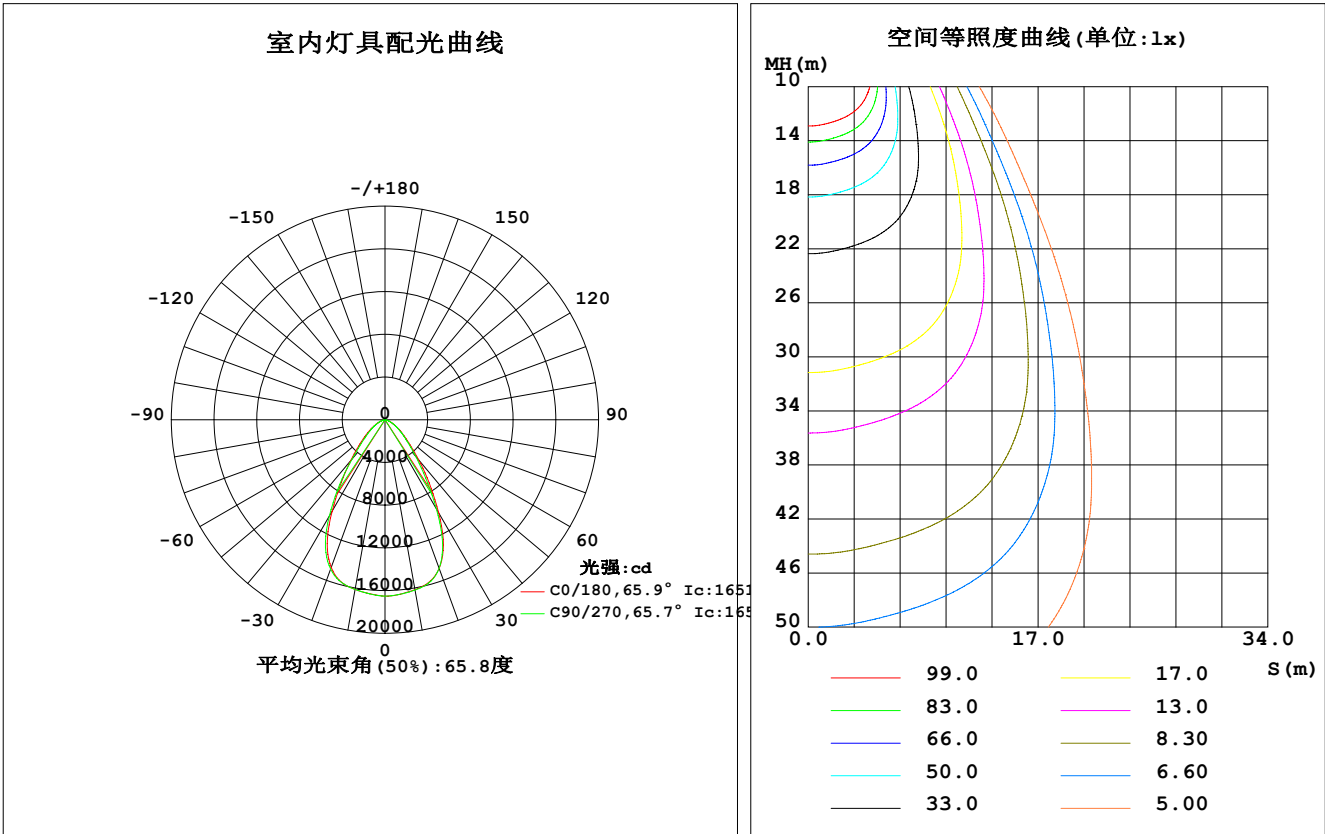

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	1617	1621	1619	1616	1614	1617	1613	1611	0- 10	1557	1557	7.31, 7.31
20	1482	1501	1481	1471	1473	1486	1489	1475	10- 20	4428	5985	28.1, 28.1
30	1006	1023	961.8	969.0	991.0	1016	1046	1020	20- 30	5840	11824	55.5, 55.5
40	491.6	452.4	448.4	463.9	498.9	484.9	479.3	481.8	30- 40	4449	16273	76.4, 76.4
50	234.7	216.2	218.7	214.1	247.9	231.7	221.7	212.2	40- 50	2536	18809	88.3, 88.3
60	114.0	106.2	108.0	106.5	122.1	115.8	110.9	103.7	50- 60	1462	20271	95.1, 95.1
70	43.33	41.92	42.62	43.69	48.83	46.81	45.14	41.38	60- 70	733.1	21004	98.6, 98.6
80	10.63	9.872	11.21	12.84	14.52	12.30	12.73	10.19	70- 80	266.1	21270	99.8, 99.8
90	0	0	0	0	0	0	0	0	80- 90	39.30	21310	100, 100
100	0	0	0	0	0	0	0	0	90-100	0	21310	100, 100
110	0	0	0	0	0	0	0	0	100-110	0	21310	100, 100
120	0	0	0	0	0	0	0	0	110-120	0	21310	100, 100
130	0	0	0	0	0	0	0	0	120-130	0	21310	100, 100
140	0	0	0	0	0	0	0	0	130-140	0	21310	100, 100
150	0	0	0	0	0	0	0	0	140-150	0	21310	100, 100
160	0	0	0	0	0	0	0	0	150-160	0	21310	100, 100
170	0	0	0	0	0	0	0	0	160-170	0	21310	100, 100
180	0	0	0	0	0	0	0	0	170-180	0	21310	100, 100
单位:°	光强:×10cd									单位:lm		

锥面光通量(90度)：17718 lm

%lum = 83.1%
%lamp = 83.1%

锥面光通量(120度)：20271 lm


%lum = 95.1%
%lamp = 95.1%

C角度范围： 0度 - 360度
C角度间隔：15.0度
测试速度：快速
环境温度:25.3℃
测试人员:yanyonggeng
测试日期:2024-10-26

γ角度范围： 0度 - 180度
γ角度间隔： 1.0度
测试系统：远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度:65.0%
测试距离:7.682米 [K=1.0000]
备注：

灯具亮度限制曲线

实测参数: U:219.3V I:0.5624A P:120.8W PF:0.9800 Freq:50.01Hz 实检光通:21309.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

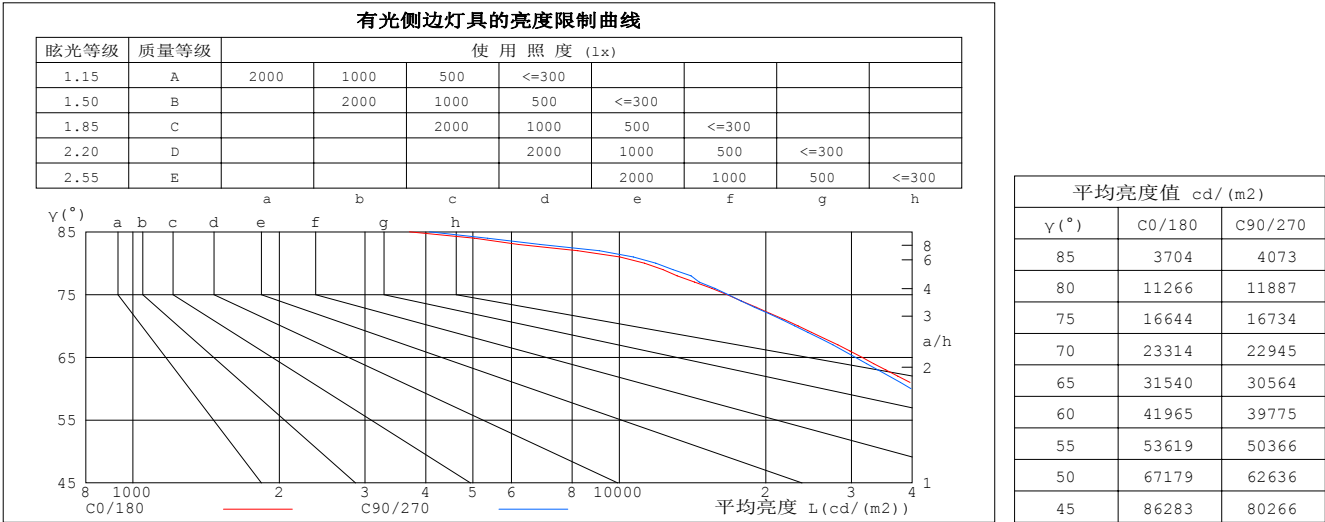


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:219.3V I:0.5624A P:120.8W PF:0.9800 Freq:50.01Hz 实检光通:21309.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.09	1.06	1.03	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	.99	.95	.91	.98	.93	.90	.94	.91	.88	.91	.88	.86	.88	.86	.84	.82
3.0	.91	.85	.80	.90	.84	.80	.87	.82	.78	.84	.80	.77	.82	.79	.76	.74
4.0	.84	.77	.72	.82	.76	.72	.80	.75	.71	.78	.74	.70	.76	.72	.69	.67
5.0	.77	.70	.65	.76	.70	.65	.74	.69	.64	.72	.68	.64	.71	.67	.63	.61
6.0	.71	.64	.59	.71	.64	.59	.69	.63	.59	.67	.62	.58	.66	.61	.58	.56
7.0	.66	.59	.55	.66	.59	.54	.64	.58	.54	.63	.58	.54	.62	.57	.53	.52
8.0	.62	.55	.50	.61	.55	.50	.60	.54	.50	.59	.54	.50	.58	.53	.49	.48
9.0	.58	.51	.47	.57	.51	.46	.56	.50	.46	.55	.50	.46	.54	.50	.46	.44
10.0	.54	.48	.43	.54	.47	.43	.53	.47	.43	.52	.47	.43	.51	.46	.43	.41

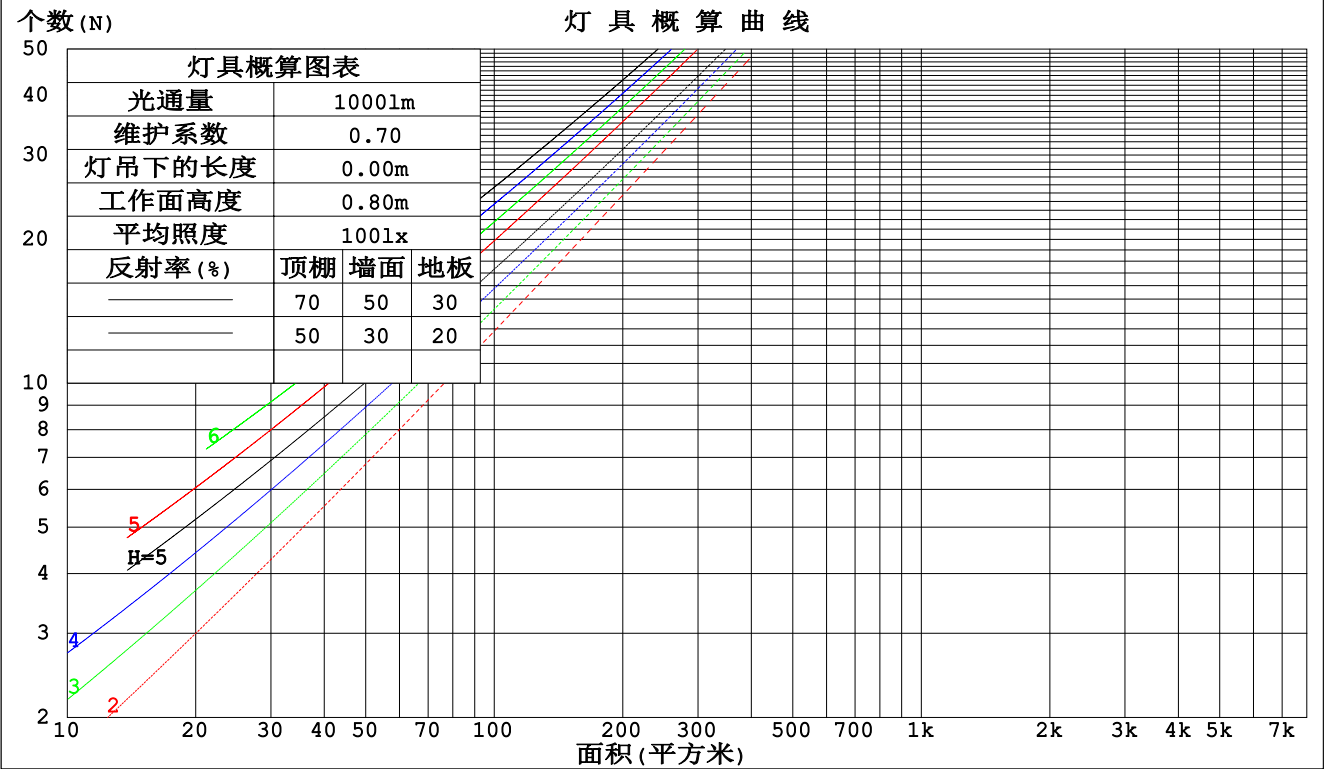

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:219.3V I:0.5624A P:120.8W PF:0.9800 Freq:50.01Hz 实检光通:21309.6x1 lm					
灯具名称: AOK HBE			灯具类型:		灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-4080-60D-P			外型尺寸:		测试编号:
制造厂商: AOK			发光口面: Φ263mm		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.212	.121	.038	.205	.117	.037	.193	.110	.035	.181	.104	.033	.170	.099	.032	
2.0	.205	.112	.034	.199	.110	.034	.188	.105	.033	.178	.100	.031	.169	.096	.030	
3.0	.195	.104	.031	.190	.102	.031	.181	.098	.030	.172	.094	.029	.164	.091	.028	
4.0	.185	.096	.028	.180	.094	.028	.172	.091	.027	.164	.088	.027	.157	.085	.026	
5.0	.175	.089	.026	.171	.088	.026	.164	.085	.025	.157	.083	.025	.151	.080	.024	
6.0	.165	.083	.024	.162	.082	.024	.156	.080	.023	.150	.078	.023	.144	.076	.023	
7.0	.157	.078	.022	.154	.077	.022	.148	.075	.022	.143	.073	.021	.138	.072	.021	
8.0	.149	.073	.020	.146	.072	.020	.141	.071	.020	.136	.069	.020	.132	.068	.020	
9.0	.142	.069	.019	.139	.068	.019	.135	.067	.019	.130	.065	.019	.126	.064	.019	
10.0	.135	.065	.018	.133	.064	.018	.129	.063	.018	.125	.062	.018	.121	.061	.017	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.142	.148	.135	.122	.102	.093	.085	.058	.054	.049	.019	.017	.016	
2.0	.161	.132	.109	.138	.114	.094	.094	.079	.065	.054	.046	.038	.017	.015	.012	
3.0	.150	.114	.085	.129	.098	.074	.088	.068	.052	.051	.040	.030	.016	.013	.010	
4.0	.141	.100	.068	.121	.086	.059	.083	.060	.042	.048	.035	.025	.015	.011	.008	
5.0	.133	.088	.055	.114	.076	.048	.079	.053	.034	.046	.031	.020	.015	.010	.007	
6.0	.126	.079	.046	.108	.069	.040	.075	.048	.028	.043	.028	.017	.014	.009	.006	
7.0	.120	.072	.039	.103	.063	.034	.071	.044	.024	.041	.026	.014	.013	.008	.005	
8.0	.114	.066	.033	.098	.057	.029	.068	.040	.021	.039	.024	.012	.013	.008	.004	
9.0	.109	.061	.029	.094	.053	.025	.065	.037	.018	.038	.022	.011	.012	.007	.004	
10.0	.104	.057	.026	.089	.049	.022	.062	.035	.016	.036	.021	.009	.012	.007	.003	

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:219.3V I:0.5624A P:120.8W PF:0.9800 Freq:50.01Hz 实检光通:21309.6x1 lm										
灯具名称: AOK HBE					灯具类型:			灯具重量:		
灯具规格: AOK-120WHBE-NV-L2-00-4080-60D-P					外型尺寸:			测试编号:		
制造厂商: AOK					发光口面: Φ263mm			遮光角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	24.7	25.9	25.0	26.1	26.2	24.5	25.7	24.8	25.9	26.0
3H	25.0	26.0	25.3	26.3	26.5	24.8	25.9	25.1	26.1	26.3
4H	25.0	26.0	25.3	26.3	26.5	24.9	25.9	25.2	26.1	26.3
6H	25.0	25.9	25.3	26.2	26.4	24.9	25.8	25.2	26.0	26.3
8H	25.0	25.9	25.3	26.1	26.4	24.8	25.7	25.1	26.0	26.2
12H	24.9	25.8	25.3	26.1	26.4	24.8	25.6	25.1	25.9	26.2
4H 2H	24.8	25.8	25.1	26.0	26.3	24.6	25.6	24.9	25.9	26.1
3H	25.2	26.0	25.5	26.3	26.6	25.0	25.9	25.3	26.1	26.4
4H	25.2	26.0	25.6	26.3	26.6	25.1	25.9	25.5	26.2	26.5
6H	25.3	25.9	25.6	26.3	26.6	25.1	25.8	25.5	26.1	26.5
8H	25.2	25.9	25.6	26.2	26.6	25.1	25.7	25.5	26.1	26.5
12H	25.2	25.8	25.6	26.1	26.5	25.1	25.6	25.5	26.0	26.4
8H 4H	25.2	25.8	25.6	26.2	26.5	25.0	25.7	25.4	26.0	26.4
6H	25.2	25.7	25.7	26.1	26.6	25.1	25.6	25.5	26.0	26.4
8H	25.2	25.7	25.7	26.1	26.5	25.1	25.5	25.5	26.0	26.4
12H	25.2	25.6	25.6	26.0	26.5	25.1	25.4	25.5	25.9	26.4
12H 4H	25.1	25.7	25.6	26.1	26.5	25.0	25.6	25.4	26.0	26.4
6H	25.2	25.6	25.6	26.1	26.5	25.1	25.5	25.5	25.9	26.4
8H	25.2	25.6	25.6	26.0	26.5	25.1	25.4	25.5	25.9	26.4
不同间隔布灯时,观察者位置引起的UGR变化:										
S = 1.0H	+ 1.2 / - 1.5					+ 1.1 / - 1.5				
1.5H	+ 1.8 / - 1.1					+ 1.4 / - 0.9				
2.0H	+ 2.2 / - 1.9					+ 1.9 / - 1.7				

依据CIE Pub.117计算, 21310lm光源光通,表格已经进行修正(8log(F/F0) = 10.6)。

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:219.3V I:0.5624A P:120.8W PF:0.9800 Freq:50.01Hz 实检光通:21309.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	77	68	63	76	68	63	75	68	63	59
0.80	85	78	73	85	77	72	83	77	72	67
1.00	92	84	79	91	84	79	89	84	79	74
1.25	97	90	86	96	89	85	94	88	84	79
1.50	100	94	90	99	93	89	97	92	88	83
2.00	105	99	95	103	98	94	100	96	93	87
2.50	107	102	98	105	101	97	102	98	95	89
3.00	109	105	101	107	103	100	104	101	98	91
4.00	112	108	105	109	106	104	106	103	101	93
5.00	113	110	108	111	108	106	107	105	103	95
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:219.3V I:0.5624A P:120.8W PF:0.9800 Freq:50.01Hz 实检光通:21309.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

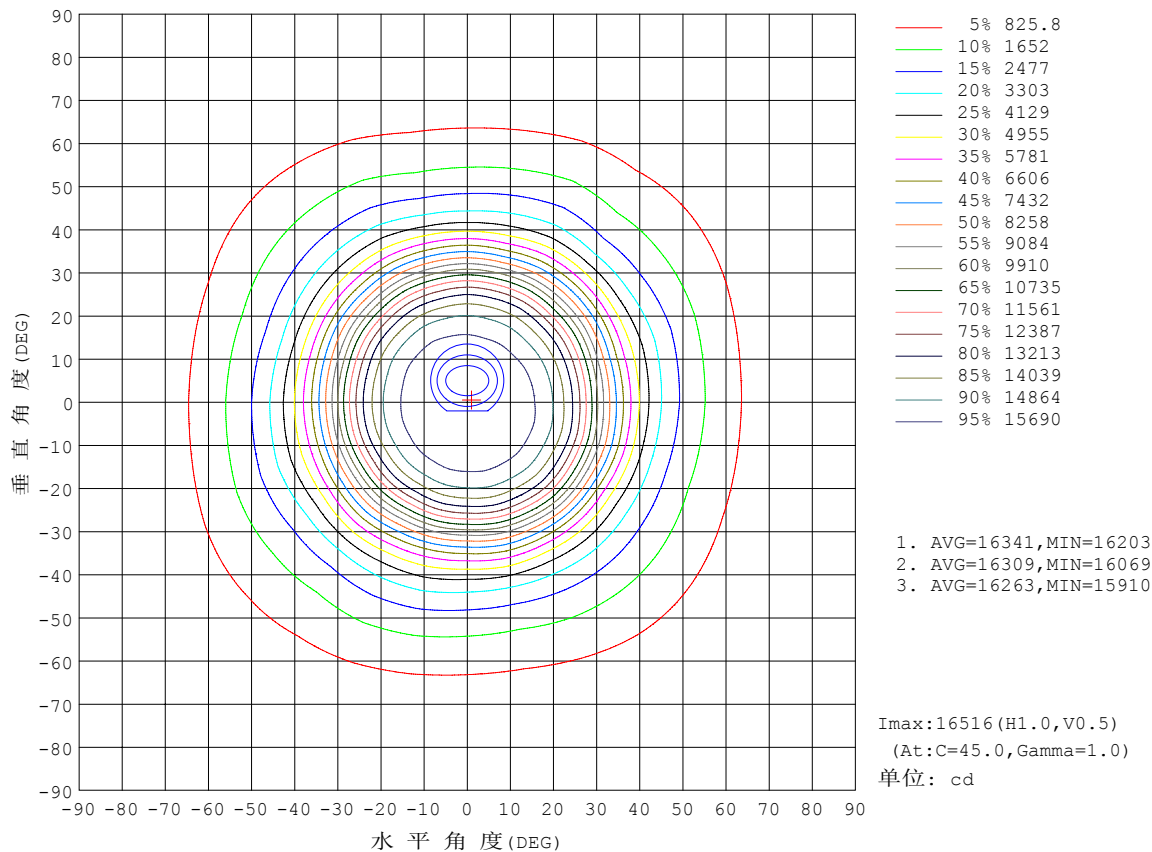


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:219.3V I:0.5624A P:120.8W PF:0.9800 Freq:50.01Hz 实检光通:21309.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

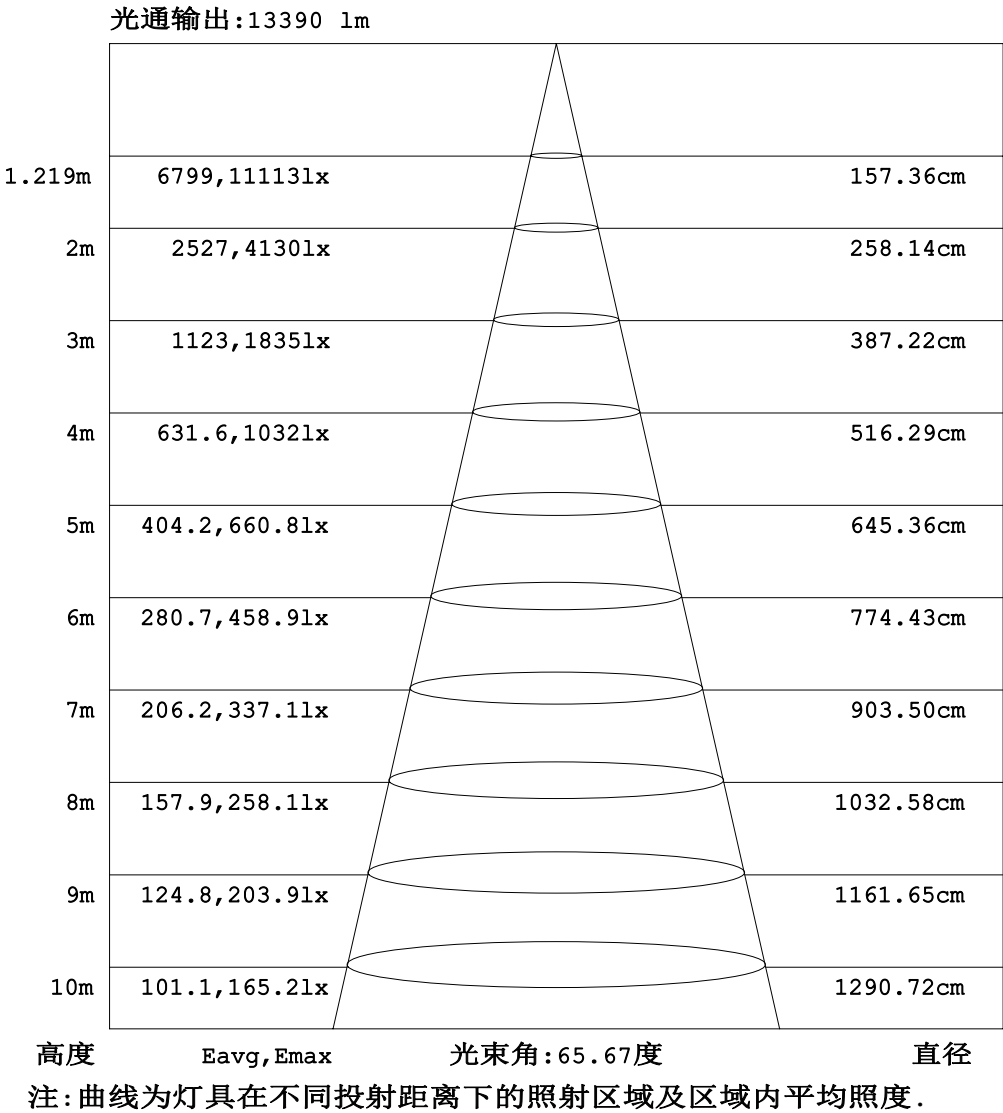


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:219.3V I:0.5624A P:120.8W PF:0.9800 Freq:50.01Hz 实检光通:21309.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

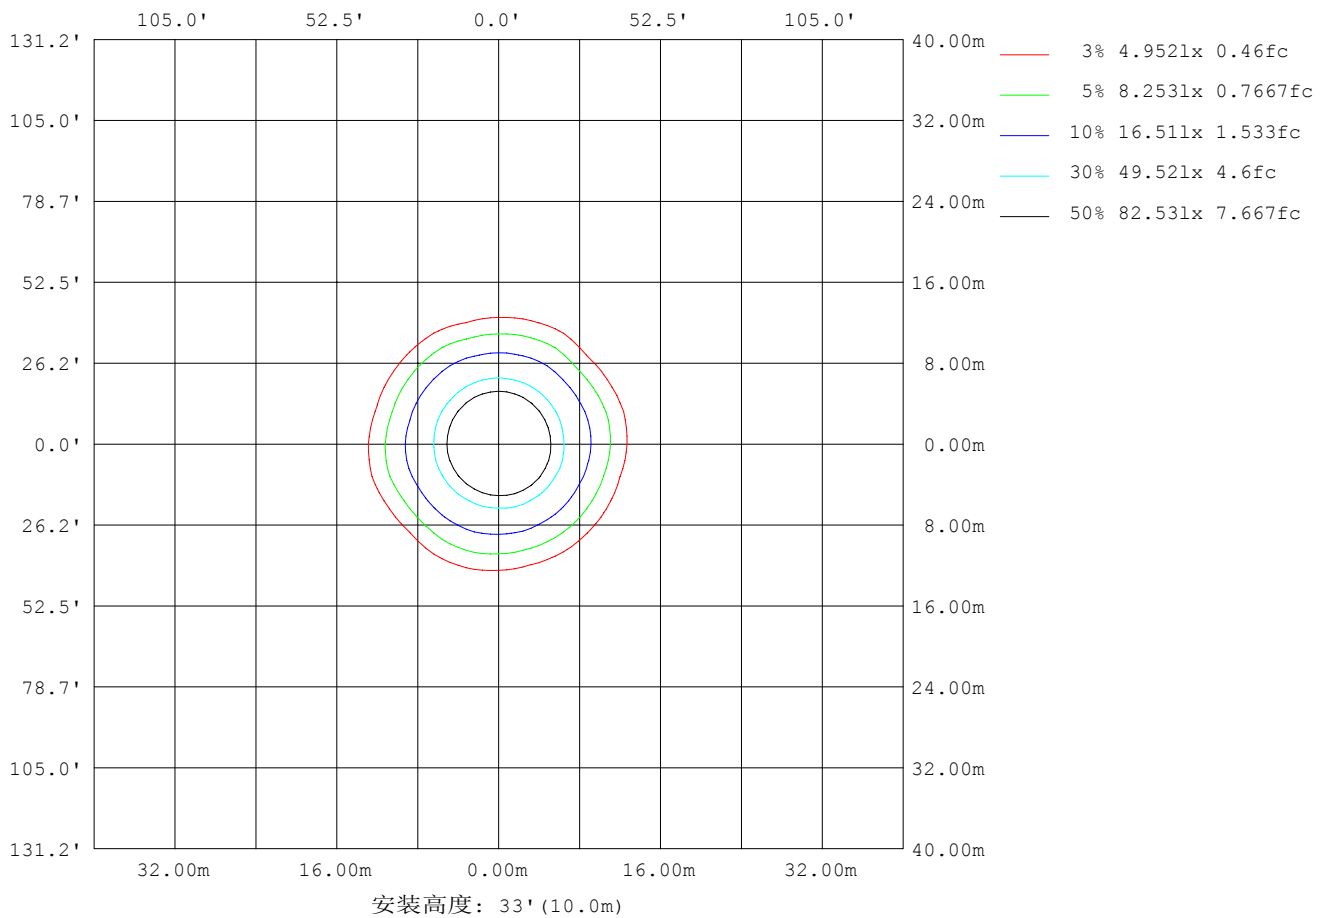

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:219.3V I:0.5624A P:120.8W PF:0.9800 Freq:50.01Hz 实检光通:21309.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:


平均亮度	数值 (cd/m ²)
L横 (65) av	33137
L横 (75) av	18164
L横 (85) av	5227
L纵 (65) av	31191
L纵 (75) av	17298
L纵 (85) av	4804
L45 (65) av	30814
L45 (75) av	16584
L45 (85) av	6507

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

平面照度曲线

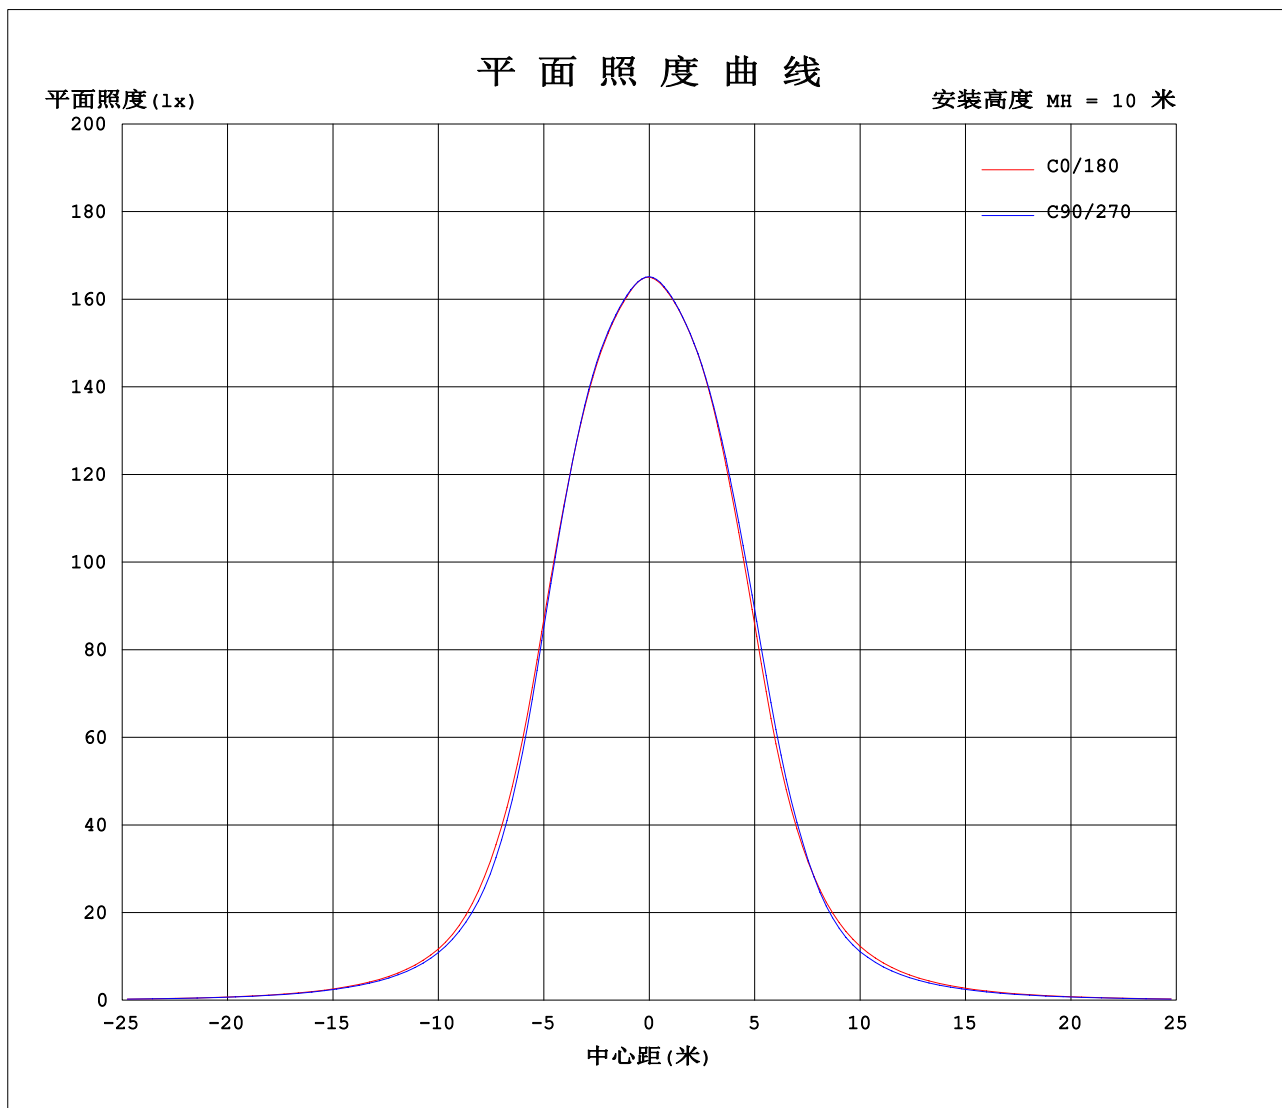

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:219.3V I:0.5624A P:120.8W PF:0.9800 Freq:50.01Hz 实检光通:21309.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

表--1		单位: ×10cd																		
C (DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	
0	1651	1651	1651	1651	1651	1651	1651	1651	1651	1651	1651	1651	1651	1651	1651	1651	1651	1651	1651	
5	1640	1642	1642	1643	1642	1642	1640	1640	1638	1637	1636	1636	1636	1635	1636	1636	1637	1636	1637	
10	1617	1620	1620	1621	1621	1621	1619	1619	1618	1616	1614	1614	1614	1614	1616	1617	1617	1615	1613	
15	1578	1584	1585	1588	1586	1587	1583	1583	1579	1579	1575	1576	1575	1576	1581	1581	1583	1579	1577	
20	1482	1495	1494	1501	1494	1493	1481	1480	1469	1471	1465	1472	1473	1473	1484	1486	1492	1487	1489	
25	1295	1314	1313	1323	1307	1301	1278	1276	1261	1269	1264	1278	1280	1280	1298	1299	1313	1309	1320	
30	1006	1025	1017	1023	997	991	962	964	952	969	967	985	991	992	1014	1016	1034	1032	1046	
35	722	730	698	694	686	689	666	669	670	691	689	702	712	714	724	717	734	735	739	
40	492	478	448	452	444	457	448	461	456	464	463	493	499	486	485	485	492	480	479	
45	332	314	305	307	303	302	308	323	319	306	315	350	349	328	328	330	333	314	314	
50	235	218	216	216	216	211	219	230	229	214	224	250	248	230	231	232	236	219	222	
55	167	153	154	154	155	150	157	165	165	153	161	179	177	164	165	166	169	156	159	
60	114	105	106	106	106	103	108	114	114	106	112	123	122	113	115	116	118	109	111	
65	72.4	67.8	67.7	69.4	68.2	67.2	70.2	74.1	74.0	70.2	72.3	79.7	79.7	74.0	75.4	75.7	77.1	71.5	73.1	
70	43.3	41.1	40.5	41.9	40.7	41.0	42.6	45.1	44.7	43.7	44.2	48.5	48.8	45.6	46.4	46.8	47.4	44.3	45.1	
75	23.4	22.5	21.4	21.4	21.6	22.7	23.5	25.0	24.2	24.5	24.3	27.1	27.7	25.9	26.0	25.2	26.1	24.7	25.1	
80	10.6	9.89	8.78	9.87	8.69	10.5	11.2	11.3	10.7	12.8	11.6	13.7	14.5	13.3	11.8	12.3	11.6	11.8	12.7	
85	1.75	1.76	2.00	2.22	2.04	1.96	1.93	2.27	2.98	3.82	3.66	3.40	3.20	3.04	3.55	3.81	3.57	2.68	2.62	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:219.3V I:0.5624A P:120.8W PF:0.9800 Freq:50.01Hz 实检光通:21309.6x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-120WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\phi 263\text{mm}$	遮光角:

表--2						单位: $\times 10\text{cd}$													
γ (DEG) \ C (DEG)	285	300	315	330	345														
0	1651	1651	1651	1651	1651														
5	1636	1637	1637	1639	1639														
10	1611	1611	1611	1613	1614														
15	1573	1574	1571	1574	1575														
20	1483	1483	1475	1478	1479														
25	1312	1313	1297	1299	1292														
30	1035	1040	1020	1022	1007														
35	725	740	733	729	712														
40	478	494	482	477	489														
45	324	331	307	315	338														
50	229	235	212	221	239														
55	164	169	151	158	169														
60	114	116	104	109	115														
65	74.1	75.0	67.7	70.5	73.4														
70	45.2	45.0	41.4	42.5	43.7														
75	24.5	24.1	22.1	22.8	23.4														
80	12.3	10.4	10.2	9.31	10.1														
85	2.17	2.57	2.47	2.21	1.59														
90	0.00	0.00	0.00	0.00	0.00														
95	0.00	0.00	0.00	0.00	0.00														
100	0.00	0.00	0.00	0.00	0.00														
105	0.00	0.00	0.00	0.00	0.00														
110	0.00	0.00	0.00	0.00	0.00														
115	0.00	0.00	0.00	0.00	0.00														
120	0.00	0.00	0.00	0.00	0.00														
125	0.00	0.00	0.00	0.00	0.00														
130	0.00	0.00	0.00	0.00	0.00														
135	0.00	0.00	0.00	0.00	0.00														
140	0.00	0.00	0.00	0.00	0.00														
145	0.00	0.00	0.00	0.00	0.00														
150	0.00	0.00	0.00	0.00	0.00														
155	0.00	0.00	0.00	0.00	0.00														
160	0.00	0.00	0.00	0.00	0.00														
165	0.00	0.00	0.00	0.00	0.00														
170	0.00	0.00	0.00	0.00	0.00														
175	0.00	0.00	0.00	0.00	0.00														
180	0.00	0.00	0.00	0.00	0.00														

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注: