


室内灯具光度数据

实测参数: U:219.2V I:0.6928A P:149.6W PF:0.9849 Freq:50.01Hz 实检光通:24474.2x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-5080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

光源数据		光度数据				光效: 163.60 lm/W
型号	2835	峰值光强 (cd)	19023	S/MH (C0/180)	0.98	
标称功率 (W)	150	灯具效率 (%)	100.0	S/MH (C90/270)	0.98	
额定电源电压 (V)	220	总光通量 (lm)	24474	η UP, DN (C0-180)	0.0, 50.0	
额定光通量 (lm)	24474.2	CIE分类	直接	η UP, DN (C180-360)	0.0, 50.0	
灯具内光源数 (只)	1	上射光通比 (%)	0.0	CIBSE SHR NOM	1.00	
实测电源电压 (V)	220	下射光通比 (%)	100.0	CIBSE SHR MAX	1.00	

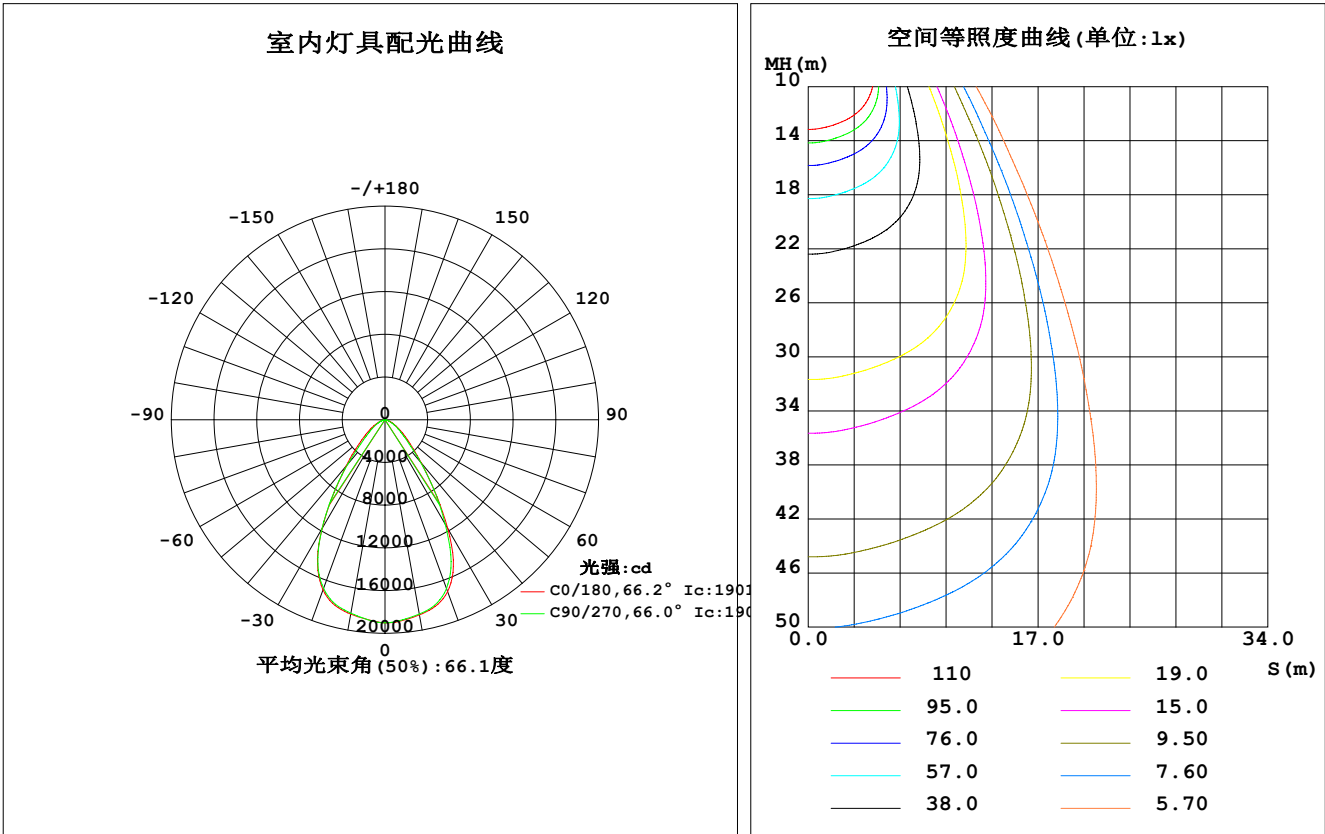

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	1855	1853	1847	1846	1848	1839	1839	1848	0- 10	1785	1785	7.29, 7.29
20	1713	1699	1682	1693	1696	1681	1682	1700	10- 20	5051	6835	27.9, 27.9
30	1177	1128	1128	1168	1178	1168	1181	1178	20- 30	6720	13555	55.4, 55.4
40	529.8	527.4	519.6	590.0	567.6	528.3	539.0	575.5	30- 40	5155	18711	76.5, 76.5
50	249.2	267.7	217.0	292.2	269.0	254.0	216.9	269.5	40- 50	2925	21636	88.4, 88.4
60	121.2	133.1	103.9	144.8	130.4	126.9	102.6	130.6	50- 60	1676	23312	95.3, 95.3
70	47.06	52.15	43.10	57.13	52.55	49.31	42.44	48.28	60- 70	829.8	24142	98.6, 98.6
80	11.35	11.02	12.86	12.77	13.53	10.25	11.35	9.886	70- 80	291.1	24433	99.8, 99.8
90	0	0	0	0	0	0	0	0	80- 90	40.74	24474	100, 100
100	0	0	0	0	0	0	0	0	90-100	0	24474	100, 100
110	0	0	0	0	0	0	0	0	100-110	0	24474	100, 100
120	0	0	0	0	0	0	0	0	110-120	0	24474	100, 100
130	0	0	0	0	0	0	0	0	120-130	0	24474	100, 100
140	0	0	0	0	0	0	0	0	130-140	0	24474	100, 100
150	0	0	0	0	0	0	0	0	140-150	0	24474	100, 100
160	0	0	0	0	0	0	0	0	150-160	0	24474	100, 100
170	0	0	0	0	0	0	0	0	160-170	0	24474	100, 100
180	0	0	0	0	0	0	0	0	170-180	0	24474	100, 100
单位:°	光强:×10cd									单位:lm		

锥面光通量(90度)：20382 lm

%lum = 83.3%

%lamp = 83.3%

锥面光通量(120度)：23312 lm

%lum = 95.3%


%lamp = 95.3%

C角度范围： 0度 - 360度
C角度间隔：15.0度
测试速度：快速
环境温度:25.3℃
测试人员:yanyonggeng
测试日期:2024-10-26

γ角度范围： 0度 - 180度
γ角度间隔： 1.0度
测试系统：远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度:65.0%
测试距离:7.682米 [K=1.0000]
备注：

灯具亮度限制曲线

实测参数: U:219.2V I:0.6928A P:149.6W PF:0.9849 Freq:50.01Hz 实检光通:24474.2x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-5080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

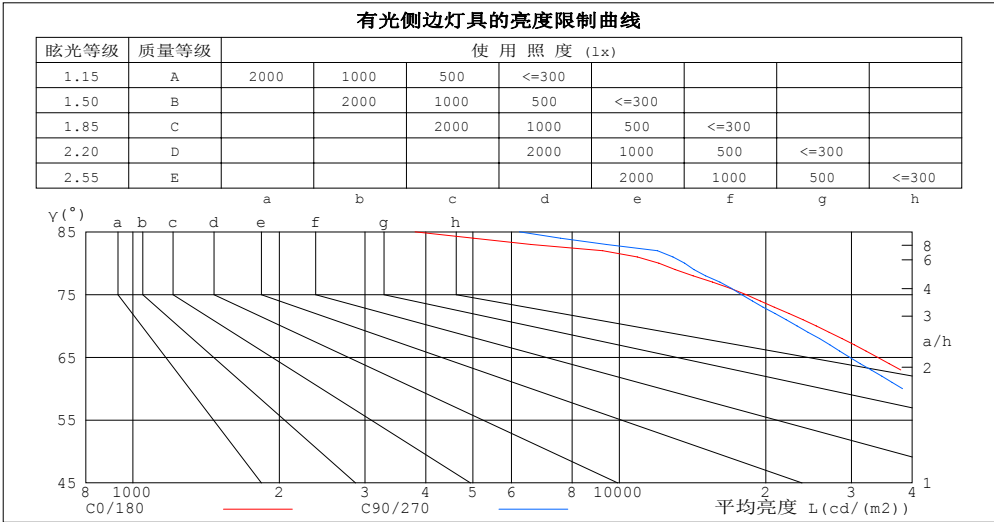

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	3804	6233
80	12062	13625
75	18217	17830
70	25393	23188
65	33936	29760
60	44723	38221
55	56913	48695
50	71549	62132
45	92377	83715


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:219.2V I:0.6928A P:149.6W PF:0.9849 Freq:50.01Hz 实检光通:24474.2x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-5080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: Φ263mm	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.09	1.06	1.03	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	.00	.95	.91	.98	.93	.90	.94	.91	.88	.91	.88	.86	.89	.86	.84	.82
3.0	.91	.85	.80	.90	.84	.80	.87	.82	.78	.84	.80	.77	.82	.79	.76	.74
4.0	.84	.77	.72	.82	.76	.72	.80	.75	.71	.78	.74	.70	.76	.72	.69	.67
5.0	.77	.70	.65	.76	.70	.65	.74	.69	.64	.72	.68	.64	.71	.67	.63	.61
6.0	.71	.64	.59	.71	.64	.59	.69	.63	.59	.67	.62	.58	.66	.62	.58	.56
7.0	.66	.59	.55	.66	.59	.54	.64	.58	.54	.63	.58	.54	.62	.57	.53	.52
8.0	.62	.55	.50	.61	.55	.50	.60	.54	.50	.59	.54	.50	.58	.53	.49	.48
9.0	.58	.51	.47	.57	.51	.46	.56	.50	.46	.55	.50	.46	.54	.49	.46	.44
10.0	.54	.48	.43	.54	.47	.43	.53	.47	.43	.52	.47	.43	.51	.46	.43	.41

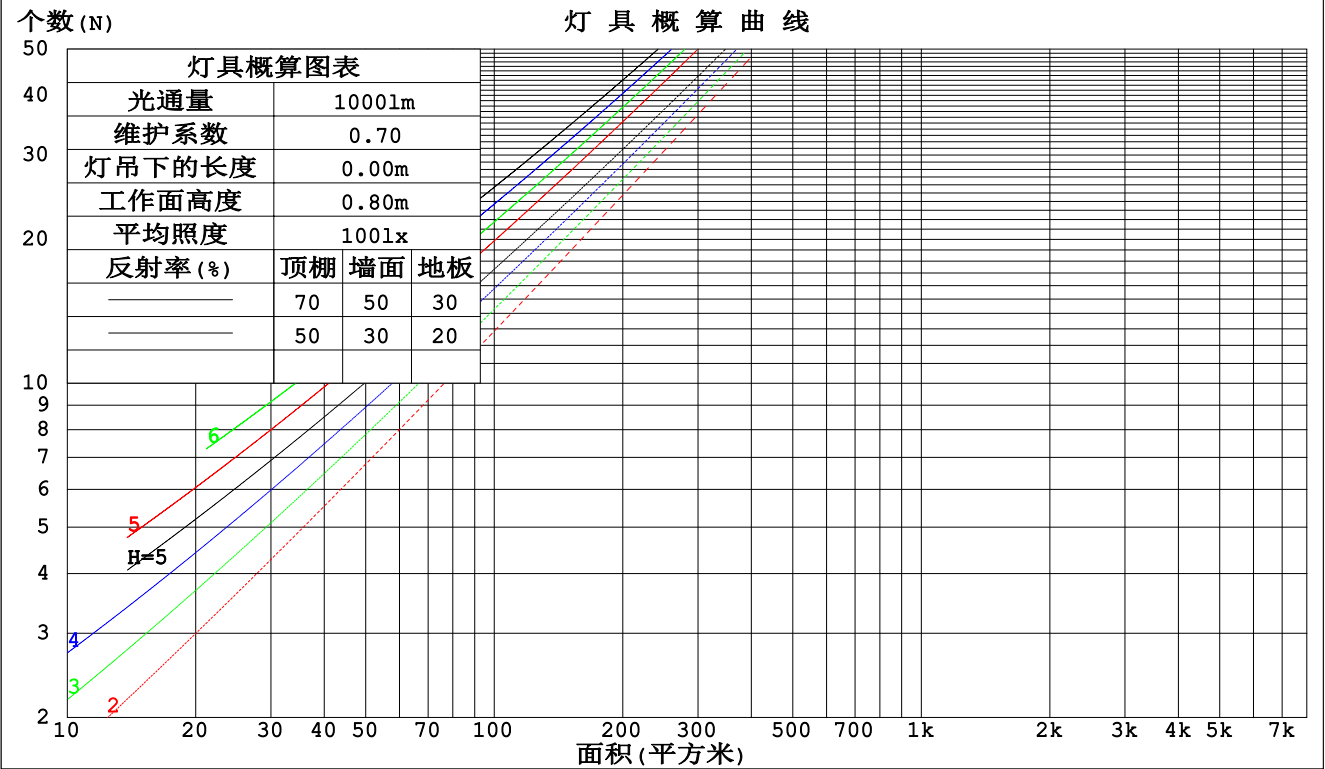

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:219.2V I:0.6928A P:149.6W PF:0.9849 Freq:50.01Hz 实检光通:24474.2x1 lm					
灯具名称: AOK HBE			灯具类型:		灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-5080-60D-P			外型尺寸:		测试编号:
制造厂商: AOK			发光口面: Φ263mm		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.212	.120	.038	.205	.117	.037	.192	.110	.035	.180	.104	.033	.170	.098	.032	
2.0	.205	.112	.034	.199	.110	.034	.188	.105	.032	.178	.100	.031	.169	.095	.030	
3.0	.195	.104	.031	.190	.102	.031	.180	.098	.030	.172	.094	.029	.164	.091	.028	
4.0	.185	.096	.028	.180	.094	.028	.172	.091	.027	.164	.088	.027	.157	.085	.026	
5.0	.175	.089	.026	.171	.088	.026	.164	.085	.025	.157	.083	.025	.151	.080	.024	
6.0	.165	.083	.024	.162	.082	.024	.156	.080	.023	.150	.078	.023	.144	.076	.023	
7.0	.157	.078	.022	.154	.077	.022	.148	.075	.022	.143	.073	.021	.138	.072	.021	
8.0	.149	.073	.020	.146	.072	.020	.141	.071	.020	.136	.069	.020	.132	.068	.020	
9.0	.142	.069	.019	.139	.068	.019	.135	.067	.019	.130	.065	.019	.126	.064	.019	
10.0	.135	.065	.018	.133	.064	.018	.129	.063	.018	.125	.062	.018	.121	.061	.017	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.142	.148	.135	.122	.102	.093	.085	.058	.054	.049	.019	.017	.016	
2.0	.161	.132	.109	.138	.114	.094	.094	.079	.065	.054	.046	.038	.017	.015	.013	
3.0	.150	.114	.085	.129	.098	.074	.088	.068	.052	.051	.040	.030	.016	.013	.010	
4.0	.141	.100	.068	.121	.086	.059	.083	.060	.042	.048	.035	.025	.015	.011	.008	
5.0	.133	.088	.055	.114	.076	.048	.079	.053	.034	.046	.031	.020	.015	.010	.007	
6.0	.126	.079	.046	.108	.069	.040	.075	.048	.028	.043	.028	.017	.014	.009	.006	
7.0	.120	.072	.039	.103	.063	.034	.071	.044	.024	.041	.026	.014	.013	.008	.005	
8.0	.114	.066	.033	.098	.057	.029	.068	.040	.021	.039	.024	.012	.013	.008	.004	
9.0	.109	.061	.029	.094	.053	.025	.065	.037	.018	.038	.022	.011	.012	.007	.004	
10.0	.104	.057	.026	.089	.049	.022	.062	.035	.016	.036	.021	.009	.012	.007	.003	

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:219.2V I:0.6928A P:149.6W PF:0.9849 Freq:50.01Hz 实检光通:24474.2x1 lm										
灯具名称: AOK HBE					灯具类型:			灯具重量:		
灯具规格: AOK-150WHBE-NV-L2-00-5080-60D-P					外型尺寸:			测试编号:		
制造厂商: AOK					发光口面: Φ263mm			遮光角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	25.1	26.2	25.3	26.4	26.6	25.3	26.4	25.5	26.6	26.8
3H	25.4	26.4	25.6	26.6	26.8	25.5	26.6	25.8	26.8	27.0
4H	25.4	26.4	25.7	26.6	26.9	25.6	26.6	25.9	26.8	27.0
6H	25.4	26.3	25.7	26.6	26.8	25.6	26.5	25.9	26.7	27.0
8H	25.4	26.2	25.7	26.5	26.8	25.5	26.4	25.9	26.7	27.0
12H	25.3	26.2	25.6	26.4	26.7	25.5	26.4	25.8	26.6	26.9
4H 2H	25.2	26.2	25.5	26.5	26.7	25.4	26.4	25.7	26.6	26.8
3H	25.6	26.4	25.9	26.7	27.0	25.8	26.6	26.1	26.9	27.2
4H	25.7	26.4	26.0	26.7	27.1	25.9	26.6	26.2	26.9	27.3
6H	25.7	26.3	26.1	26.7	27.0	25.9	26.6	26.3	26.9	27.2
8H	25.6	26.3	26.0	26.6	27.0	25.9	26.5	26.3	26.8	27.2
12H	25.6	26.2	26.0	26.6	26.9	25.8	26.4	26.2	26.8	27.2
8H 4H	25.6	26.2	26.0	26.6	27.0	25.8	26.4	26.2	26.8	27.2
6H	25.6	26.2	26.1	26.6	27.0	25.8	26.4	26.3	26.8	27.2
8H	25.6	26.1	26.1	26.5	26.9	25.8	26.3	26.3	26.7	27.2
12H	25.6	26.0	26.1	26.4	26.9	25.8	26.2	26.3	26.6	27.1
12H 4H	25.6	26.2	26.0	26.5	26.9	25.8	26.3	26.2	26.7	27.1
6H	25.6	26.1	26.1	26.5	26.9	25.8	26.3	26.3	26.7	27.1
8H	25.6	26.0	26.1	26.4	26.9	25.8	26.2	26.3	26.6	27.1
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 1.1 / - 1.7					+ 1.0 / - 1.8				
1.5H	+ 1.6 / - 1.4					+ 1.3 / - 1.7				
2.0H	+ 2.0 / - 2.2					+ 1.8 / - 2.3				

依据CIE Pub.117计算, 24474lm光源光通, 表格已经进行修正(8log(F/F0) = 11.1)。

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:219.2V I:0.6928A P:149.6W PF:0.9849 Freq:50.01Hz 实检光通:24474.2x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格:AOK-150WHBE-NV-L2-00-5080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面:Φ263mm	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	77	68	63	76	68	63	75	68	63	59
0.80	85	78	73	85	77	73	83	77	72	67
1.00	92	84	80	91	84	79	89	84	79	74
1.25	97	90	86	96	90	85	94	88	84	79
1.50	101	94	90	99	93	89	97	92	88	83
2.00	105	99	95	103	98	94	100	96	93	87
2.50	107	102	98	105	101	97	102	98	95	89
3.00	109	105	101	107	103	100	104	101	98	91
4.00	112	108	105	110	106	104	106	103	101	94
5.00	113	110	108	111	108	106	107	105	103	95
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度:25.3℃
测试人员:yanyonggeng
测试日期:2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度:65.0%
测试距离:7.682米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:219.2V I:0.6928A P:149.6W PF:0.9849 Freq:50.01Hz 实检光通:24474.2x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-5080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

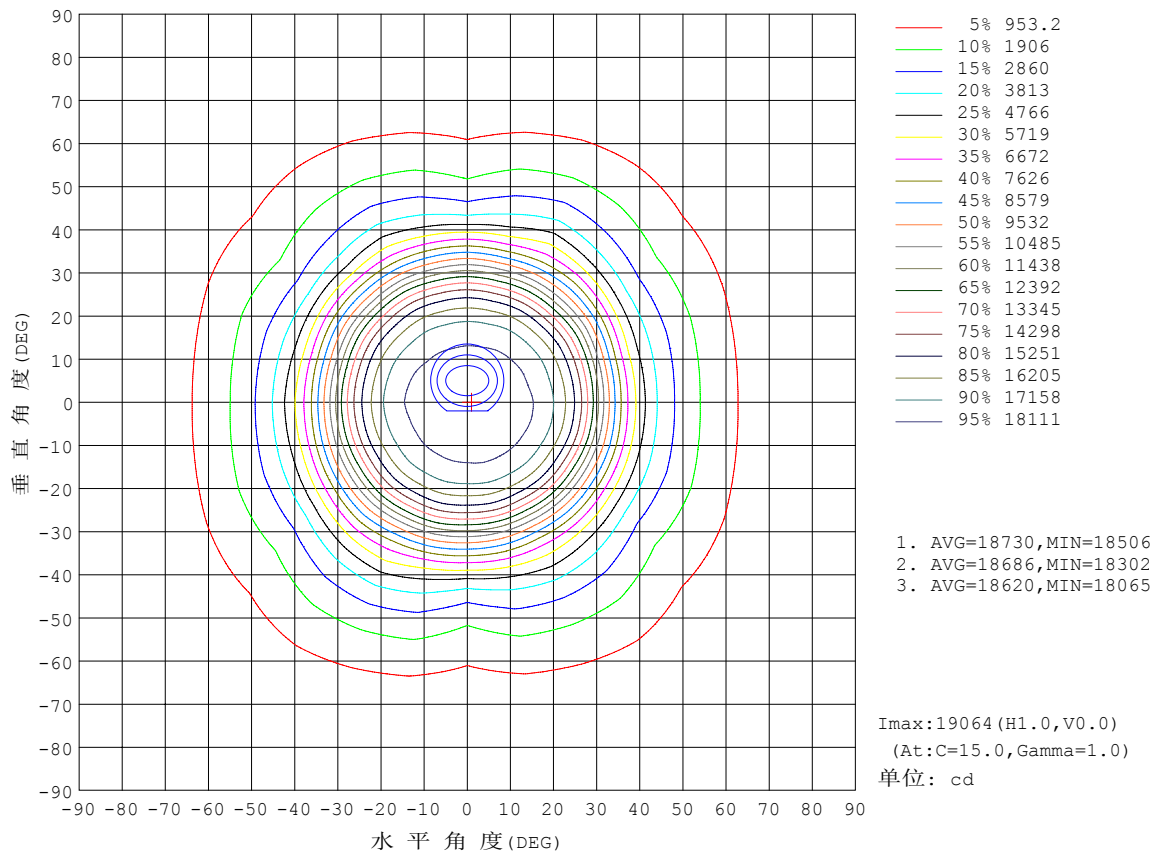


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯具有效平均照度图

实测参数: U:219.2V I:0.6928A P:149.6W PF:0.9849 Freq:50.01Hz 实检光通:24474.2x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-5080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

光通输出:15369 lm

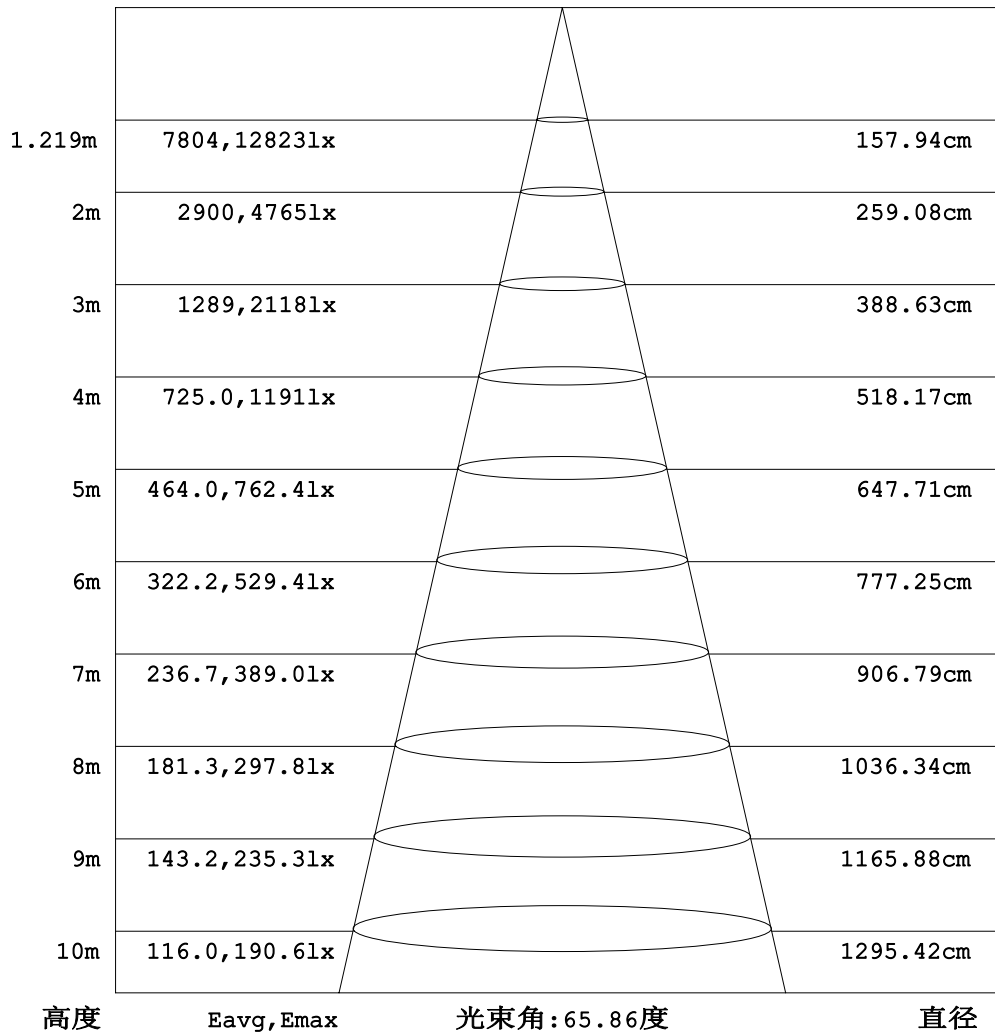


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:219.2V I:0.6928A P:149.6W PF:0.9849 Freq:50.01Hz 实检光通:24474.2x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-5080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

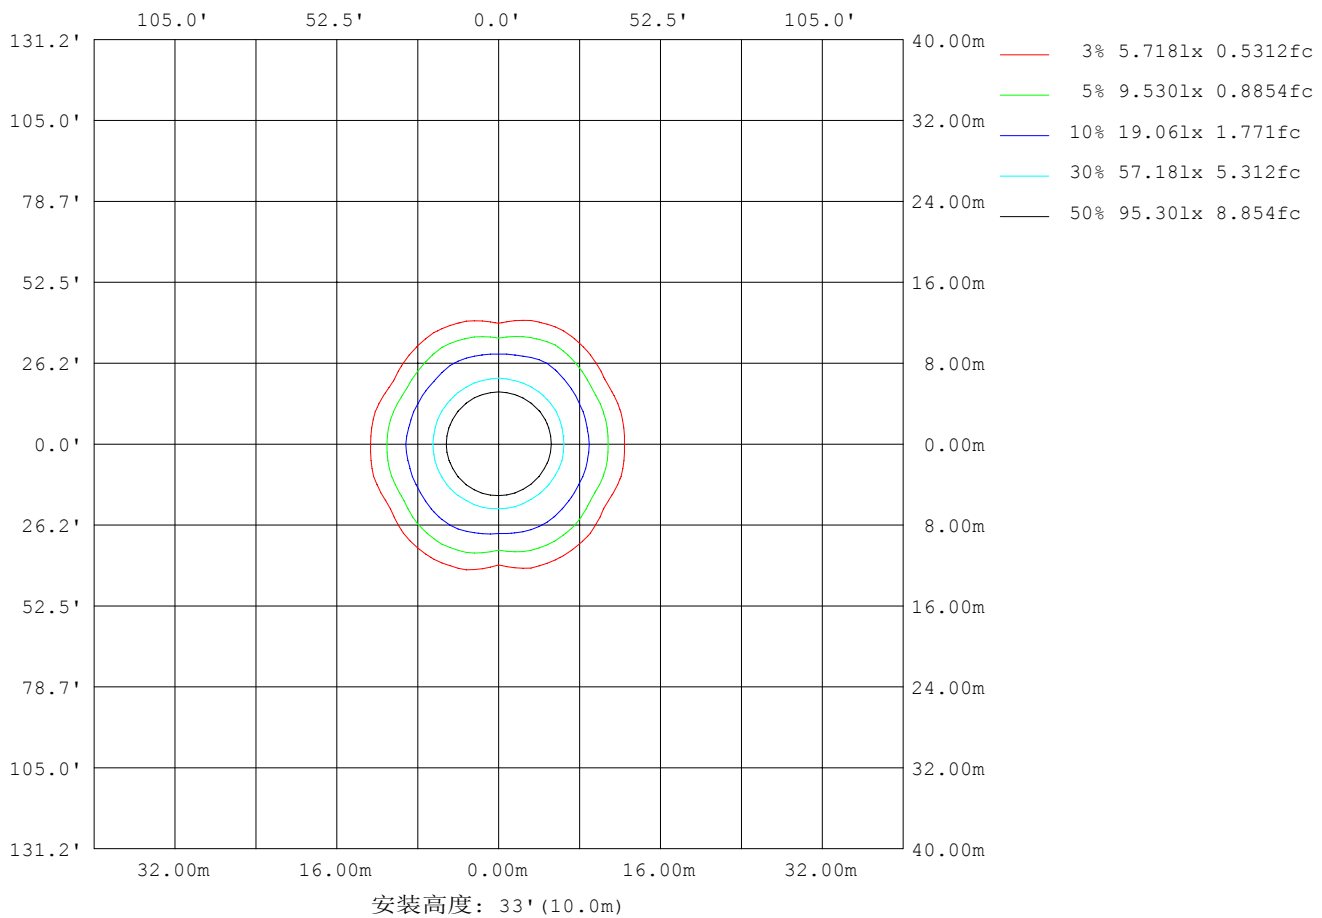

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:219.2V I:0.6928A P:149.6W PF:0.9849 Freq:50.01Hz 实检光通:24474.2x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-5080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:


平均亮度	数值 (cd/m ²)
L横 (65) av	35473
L横 (75) av	19475
L横 (85) av	5021
L纵 (65) av	29618
L纵 (75) av	17519
L纵 (85) av	5191
L45 (65) av	37604
L45 (75) av	17913
L45 (85) av	6494

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

平面照度曲线

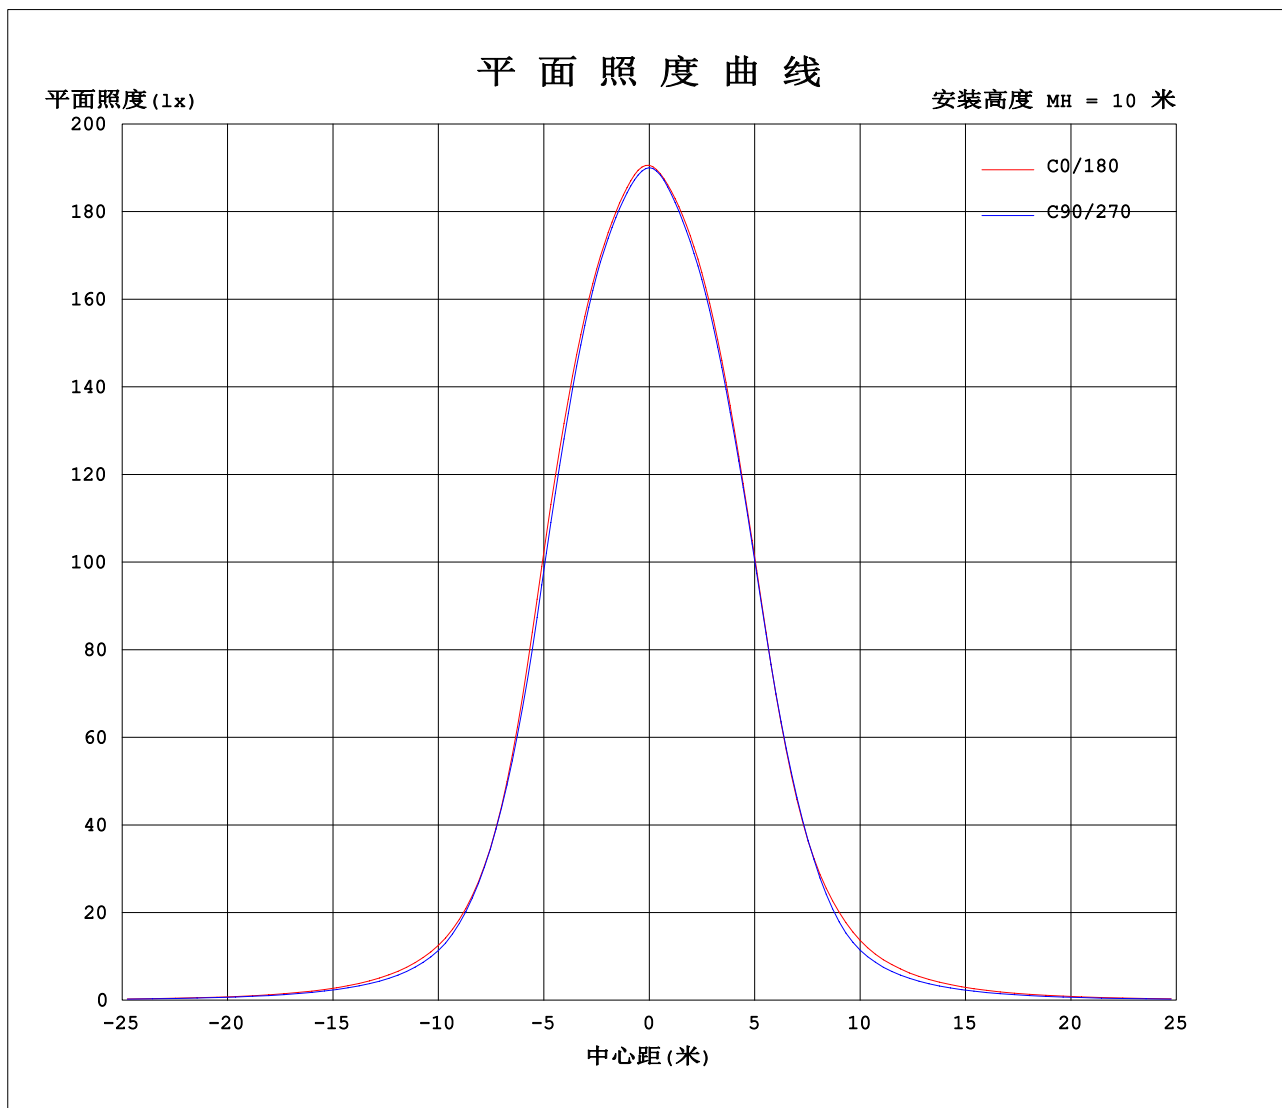

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:219.2V I:0.6928A P:149.6W PF:0.9849 Freq:50.01Hz 实检光通:24474.2x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-5080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: Φ 263mm	遮光角:

表--1		单位: $\times 10\text{cd}$																	
γ (DEG) \ C (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1901	1901	1901	1901	1901	1901	1901	1901	1901	1901	1901	1901	1901	1901	1901	1901	1901	1901	1901
5	1887	1888	1886	1886	1883	1883	1881	1881	1879	1879	1878	1879	1878	1877	1877	1876	1877	1877	1879
10	1855	1856	1853	1853	1851	1851	1847	1847	1845	1846	1845	1847	1848	1845	1842	1839	1838	1837	1839
15	1811	1813	1808	1807	1804	1804	1798	1800	1799	1801	1798	1801	1801	1797	1795	1788	1788	1785	1789
20	1713	1714	1702	1699	1689	1690	1682	1689	1687	1693	1688	1695	1696	1690	1690	1681	1685	1677	1682
25	1517	1513	1488	1483	1465	1473	1466	1482	1479	1491	1485	1494	1495	1489	1496	1486	1495	1483	1489
30	1177	1168	1135	1128	1111	1125	1128	1150	1148	1168	1162	1177	1178	1167	1181	1168	1183	1169	1181
35	804	813	790	786	774	796	800	819	823	852	841	841	832	822	834	821	830	834	843
40	530	527	517	527	550	536	520	550	598	590	566	560	568	539	537	528	571	549	539
45	354	357	335	370	386	367	322	388	426	410	369	383	386	368	335	354	390	366	324
50	249	256	229	268	275	268	217	281	302	292	251	275	269	263	227	254	277	261	217
55	177	184	160	193	197	193	152	204	215	209	177	199	190	190	159	183	196	188	150
60	121	125	109	133	136	133	104	140	147	145	122	137	130	131	110	127	135	128	103
65	77.7	80.5	71.5	86.4	87.3	85.2	68.3	89.4	94.0	93.7	79.2	88.4	85.1	84.6	73.1	82.3	86.3	81.2	67.6
70	47.1	48.2	43.9	52.2	52.2	51.6	43.1	53.7	56.1	57.1	48.8	53.7	52.6	51.3	45.6	49.3	52.0	48.1	42.4
75	25.5	26.4	24.1	25.1	27.2	28.6	25.1	29.5	29.6	28.9	27.2	30.0	29.2	28.1	25.3	23.9	27.4	25.7	24.2
80	11.4	11.5	9.87	11.0	10.7	13.0	12.9	13.9	11.7	12.8	11.7	13.7	13.5	12.6	10.1	10.2	10.3	11.0	11.4
85	1.80	2.24	2.56	3.16	2.80	3.06	2.95	3.69	3.75	4.19	3.52	3.24	2.96	2.44	2.66	2.89	2.58	2.03	1.96
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-10-26

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:219.2V I:0.6928A P:149.6W PF:0.9849 Freq:50.01Hz 实检光通:24474.2x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格:AOK-150WHBE-NV-L2-00-5080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面:φ263mm	遮光角:

表--2						单位: x10cd													
C (DEG) γ (DEG)	285	300	315	330	345														
0	1901	1901	1901	1901	1901														
5	1879	1882	1882	1886	1886														
10	1841	1846	1848	1853	1853														
15	1790	1799	1802	1808	1809														
20	1682	1698	1700	1711	1711														
25	1482	1499	1499	1519	1517														
30	1165	1181	1178	1202	1185														
35	824	844	853	847	810														
40	544	599	575	545	520														
45	370	418	382	350	357														
50	265	293	270	240	256														
55	191	205	192	166	182														
60	129	138	131	113	124														
65	81.6	88.0	82.9	72.7	78.0														
70	48.3	51.5	48.3	43.7	46.3														
75	25.9	26.8	22.8	23.6	24.7														
80	11.1	9.90	9.89	9.39	10.7														
85	1.87	2.08	2.06	2.01	1.76														
90	0.00	0.00	0.00	0.00	0.00														
95	0.00	0.00	0.00	0.00	0.00														
100	0.00	0.00	0.00	0.00	0.00														
105	0.00	0.00	0.00	0.00	0.00														
110	0.00	0.00	0.00	0.00	0.00														
115	0.00	0.00	0.00	0.00	0.00														
120	0.00	0.00	0.00	0.00	0.00														
125	0.00	0.00	0.00	0.00	0.00														
130	0.00	0.00	0.00	0.00	0.00														
135	0.00	0.00	0.00	0.00	0.00														
140	0.00	0.00	0.00	0.00	0.00														
145	0.00	0.00	0.00	0.00	0.00														
150	0.00	0.00	0.00	0.00	0.00														
155	0.00	0.00	0.00	0.00	0.00														
160	0.00	0.00	0.00	0.00	0.00														
165	0.00	0.00	0.00	0.00	0.00														
170	0.00	0.00	0.00	0.00	0.00														
175	0.00	0.00	0.00	0.00	0.00														
180	0.00	0.00	0.00	0.00	0.00														

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度:25.3℃
测试人员:yanyonggeng
测试日期:2024-10-26

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度:65.0%
测试距离:7.682米 [K=1.0000]
备注: